

PROPOSED PLAN LAYOUT

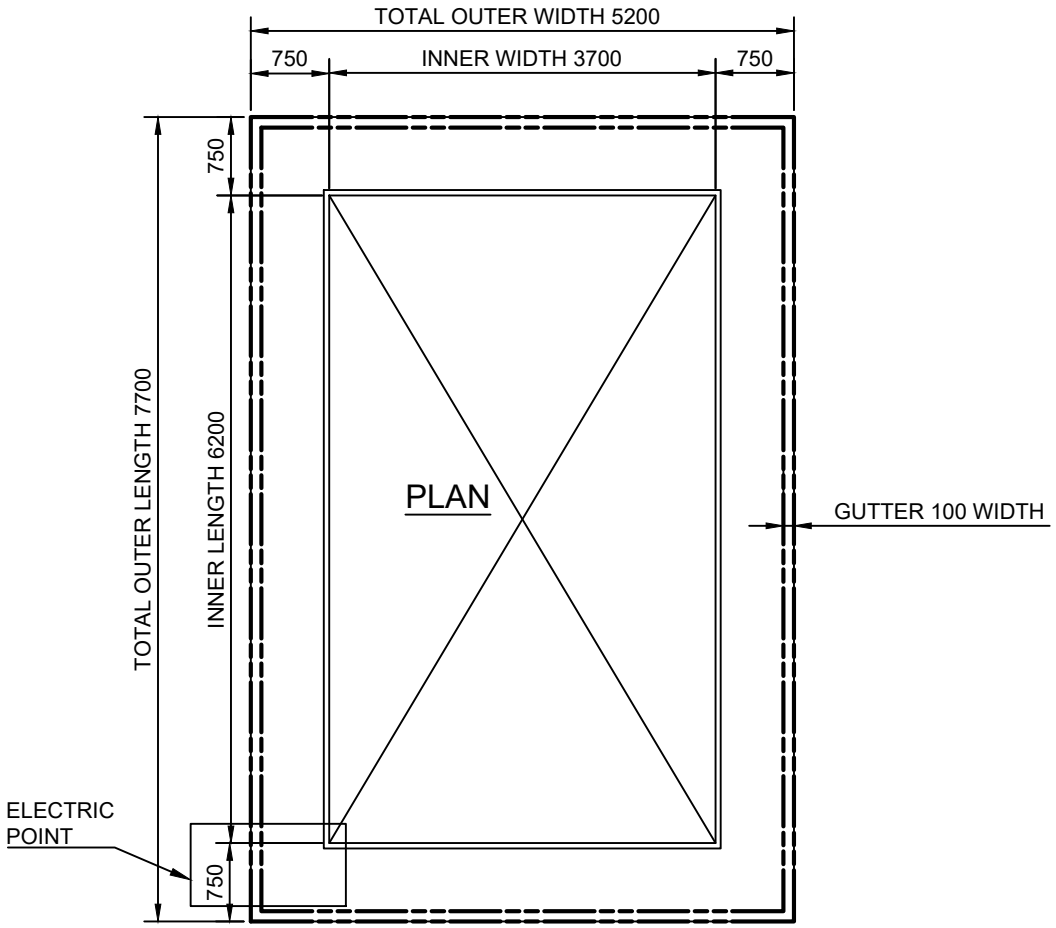

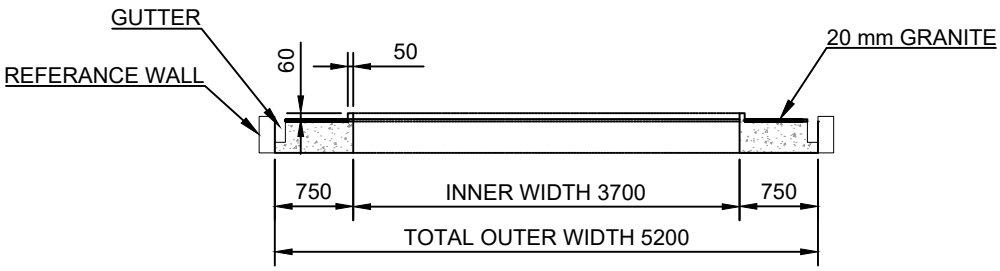

SECTION VIEW

1. THE STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE OF GRANITE 20MM FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 80MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. AL PROFILE - POWDER COATED
6. GASKET - EPDM
7. MOTOR - ITALIAN/GERMAN MAKE
8. ELECTRICAL REQUIREMENT - .
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK IS IN CLIENT SCOPE

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern

TITLE			
PROPOSED PLAN LAYOUT (IN CLIENT SCOPE)			
	NAME	SIGN	DATE
DRAWN	N.K.		18.02.23
CHECK	P.M.		18.02.23
APPRD.	V. T.		18.02.23

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT - MR. TILEKAR ROOF	
LOCATION - PUNE_IN	
PRODUCT - RETRACTABLE ROOF	
NIHVA\22-23\02XX	REV- 0
SCALE: NTS	SHEET: 01 OF 01

If any queries contact : supportautomation@nihva.com

ALL DIMENSION ARE IN mm