EHB AIR BALANCER

ENDO AIR BALANCER "EHB" SERIES

Type-MS-A Hoisting "WITH" DOWN STOP

AIR BALANCER is handling equipment powered by compressed air.

●Adjustment of lifting and lowering speed

Both speeds are adjustable by turning the knob on control module.

●Floating capability


By adding or reducing force directly onto the hung load, the load will move down or up respectively. The range of floating is about 35cm up and down from stable position.



Grip for operation



Pendant for operation

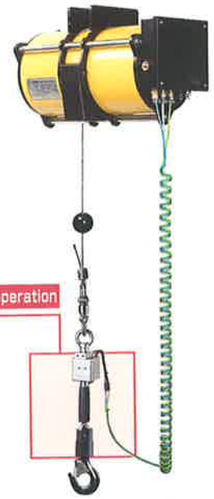

EHB-85 MS-AG



EHB-85 MS-A

Control module	model	hose	operation	weight
hoisting	MS-A	straight hose×3	pendant	3.5kg
hoisting	MS-AG	coil hose×3	grip	5kg

Specification

model	Air pressure (MPa)	Max lifting capacity (kg)	Stroke (m)	weight (kg) (*)	Cable dia (mm)	Air inlet
EHB-50	0.7	55	1.9	28	φ4.76	Rc 3/8
	0.6	48				
	0.5	40				
	0.4	32				
EHB-85	0.7	90	1.9	29		
	0.6	75				
	0.5	62				
	0.4	50				
EHB-130	0.7	140	1.9	36		
	0.6	120				
	0.5	100				
	0.4	80				
EHB-270	0.7	270	1.8	43	φ6	
	0.6	230				
	0.5	190				
	0.4	150				

(*) weight: without module

POINT

●Grip type controller

Grip type controller allows a more sensitive control of height of lift.

●DOWN STOP

Added safety measure. Hung load will not fall even if the air supply is cut off or when hoses are broken.

●Energy-saving design

Air consumption of AIR BALANCER is only 1/7 of that of AIR HOIST. (comparing our existing model)

●Clean design

No lubrication is needed and produces no oil mist.

●Quiet design

With no air motor, AIR BALANCER produces very little noise in operation.

ENDO KOGYO CO.,LTD.

Ecological and economical solution

Type-MS Hoisting "WITHOUT" DOWN STOP

●Adjustment of lifting and lowering speed

Both speeds are adjustable by turning the knob on control module

●Floating capability

By adding or reducing force directly onto the hung load, the load will move down or up respectively. The range of floating is about 35cm up and down from stable position.



EHB-50+MS



EHB-130+MS



EHB-270+MS



EHB-85
MS

Control module	model	hose	operation	weight
hoisting	MS	straight hose×2	pendant	2kg

Specification

model	Air pressure (MPa)	Max lifting capacity (kg)	Stroke (m)	weight (kg) (*)	Cable dia (mm)	Air inlet
EHB-50	0.7	55	1.9	28	φ4.76	Rc 3/8
	0.6	48				
	0.5	40				
	0.4	32				
EHB-85	0.7	90	1.9	29		
	0.6	75				
	0.5	62				
	0.4	50				
EHB-130	0.7	140	1.9	36		
	0.6	120				
	0.5	100				
	0.4	80				
EHB-270	0.7	270	1.8	43	φ6	
	0.6	230				
	0.5	190				
	0.4	150				

(*) weight: without module

POINT

●Economical model

●energy-saving design

Air consumption of AIR BALANCER is only 1/7 of that of AIR HOIST. (comparing our existing model)

●Clean design

No lubrication is needed and produces no oil mist.

●Quiet design

With no air motor, AIR BALANCER produces very little noise in operation.

●DOWN STOP is "NOT" available when hose for lowering control is cut.