

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

SR. NO.

1 TYPA -A

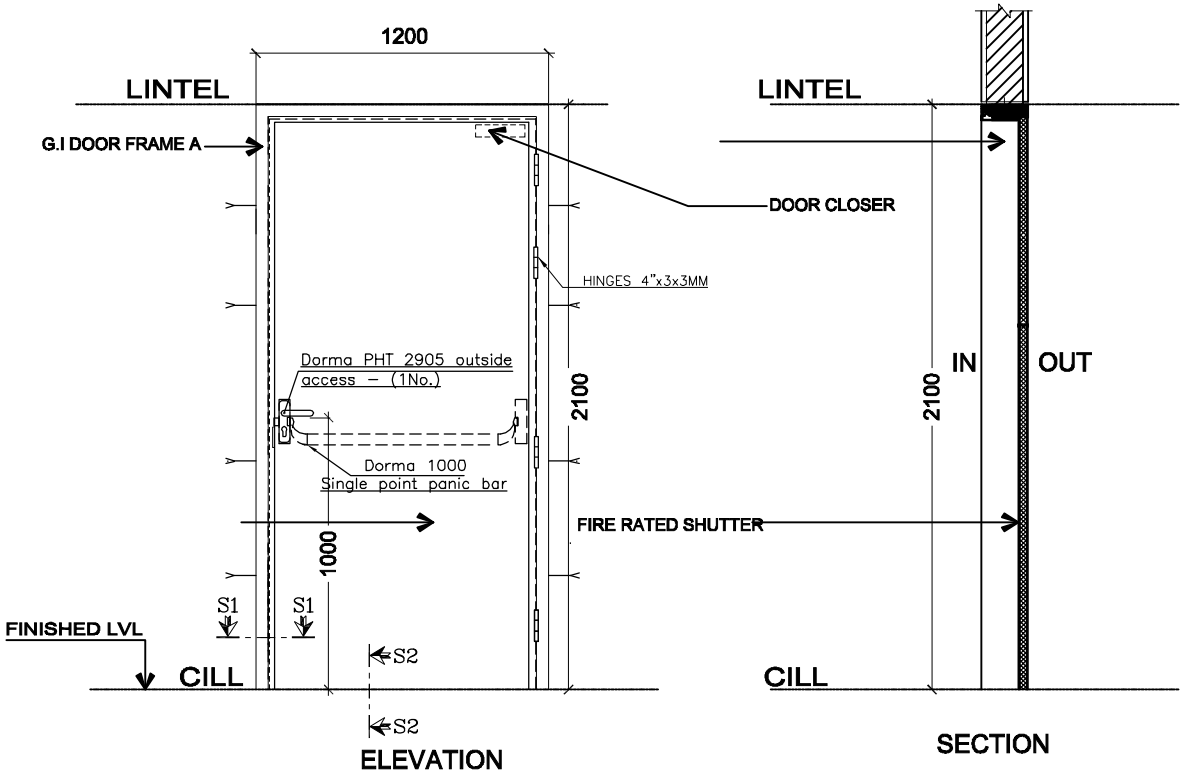

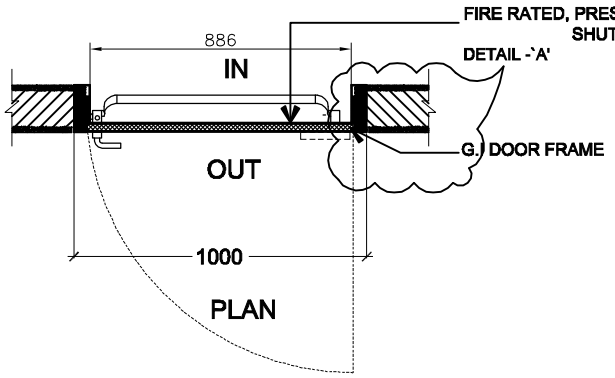


TYPE A- 1200X2100


2hr,FIRE RATED, PRESS METAL SINGLE SHUTTER

NOTES :-

1) Door Frame shall be fabricated from 1.2mmThk. Glav. steel sheets to form a double rebate profile & fixed to wall with Anchor bolts.
2) Shutter Panels shall be fabricated from 0.8mmThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm.& shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. of SS Ball Bearing Butt Hinges shall be provided on each Shutter Size 4"x3"X3mm--
4) Dorma PHCR 1000 Panic bar with Outsie trim
5) SS D Handle Pair
6) Godrej Door Closer

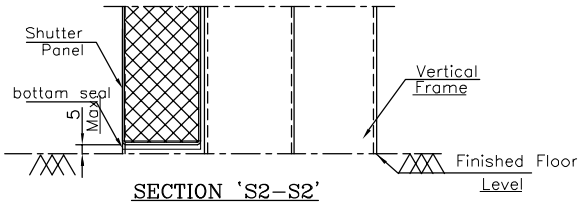

SECTION 'S2–S2'

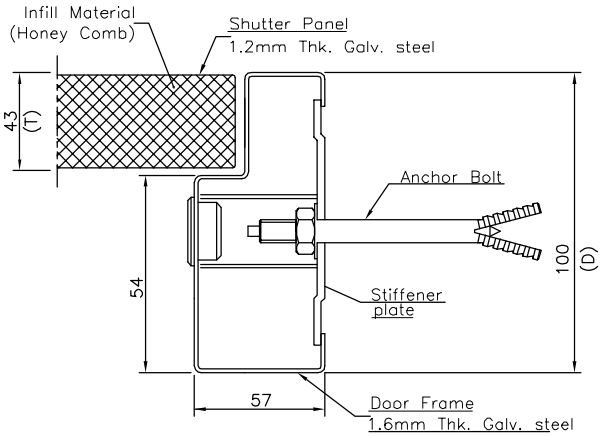

DEATIL–'A'

MOD.No.	MODIFICATION	AREA	MOD. BY	DATE	CH.NOTE No.

	NAME	DATE	MATL. SPEC.	FINISH	----
DRN.	MUKUL	09/07/2015	---	No. OFF	----
CHK.	SUJIT	09/07/2015		WT. (kg)	----
APP.				SCALE	NTS
	DIMN. mm.		SHEET– 01	OF– 01	

DESCRIPTION: PROPOSED SPECIFICATION OF SINGLE LEAF FIRE RATED DOOR

PROJECT: NIHVA TECHNOLOGIES

AHURA MAZDA MANUFACTURING CO.PVT.LTD.

DRG. NO. 5178–001 Rev.0

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT