
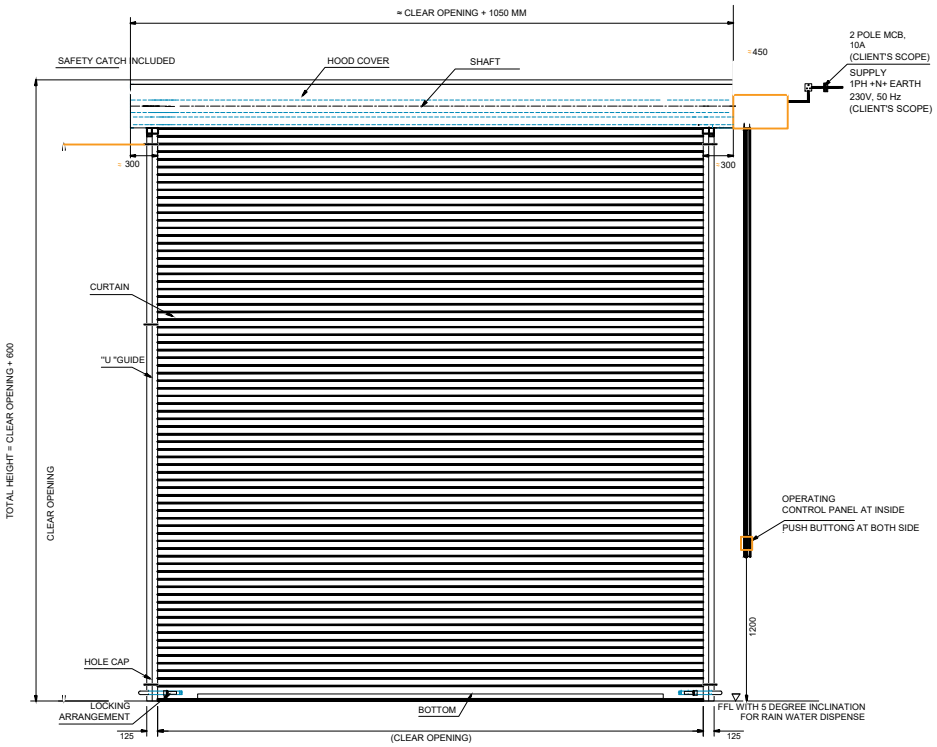


INSIDE ELEVATION



TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Double Wall PUF Insulated Motorised Rolling Shutter (Direct Drive) with Manual Chain Arrangment
2.	Location Area	Inside / Outside
3.	Mounting Surface	Side Brackets: Optional / Structure
4.	Slat	Galvanised Steel - 95 x 19 mm With PUF Filled Inside (THK-0.5 mm TCT)
5.	Density	48 kg /m3 (For Wind Speed 50 m/Sec)
6.	Bottom Profile	MS Plate 100 x 2 mm Thk. with Angle Stiffner
7.	Guide Profile	M.S." U " Shape profile 75 x 2 mm Thk.
8.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
9.	Accessories	Control Panel,Safety Catch,Push Button On Both Side,In-Built Limit Switches

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3000	3500	01