
DIN 439/936 Lock Nut (Hexagon Thin Nut) - basic dimensions

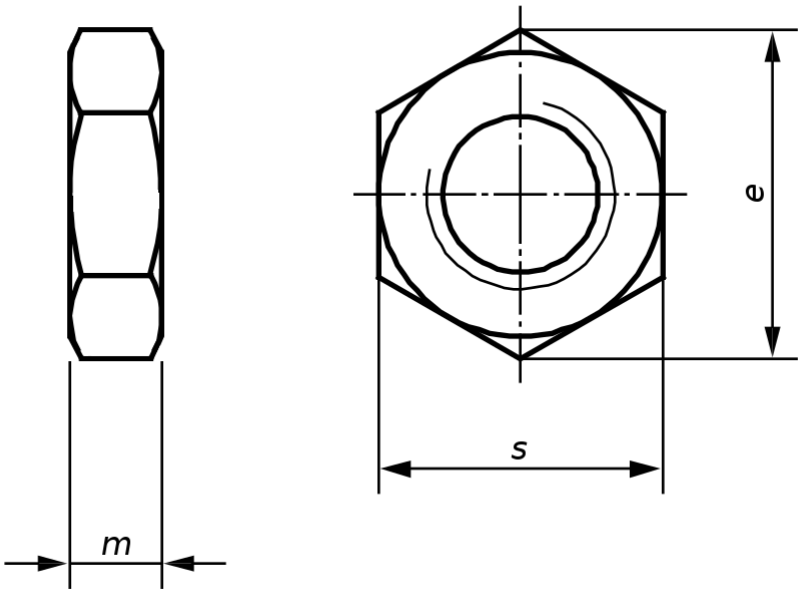

DIN 439 – Hexagon thin nuts

Size	DIN 439		
	M6	**M8**	**M10**
Pitch	1	1.25	1.5
e (min.)	10.89	14.2	18.72
m (min / max)	2.72-3.2	3.52-4	4.52-5
s (min / max)	9.64-10	12.57-13	16.57-17

DIN 936 – Hexagon thin nuts

Size	DIN 936											
	M8	**M10**	**M12**	**M16**	**M20**	**M22**	**M24**	**M27**	**M30**	**M36**	**M42**	**M48**
Pitch	1.25	1.5	1.75	2	2.5	2.5	3	3	3.5	4	4.5	5
e (min.)	14.38	18.90	21.1	26.75	32.95	35.03	39.55	45.20	50.85	60.79	71.3	82.60
m (min / max)	3.8-4.7	4.6-5.7	5.3-6.64	5.9-7.42	6.5-8.1	7.3-9.1	7.3-9.1	10.9-12	10.9-12	12.9-14	14.9-16	16.9-18
s (min / max)	12.73-13	16.73-17	18.67-19	23.67-24	29.16-30	31-32	35-36	40-41	45-46	53.8-55	63.1-65	73.1-75

Dimensions in millimetres

Whilst the information is provided in good faith, Andrews Fasteners Ltd are not under any responsibility or liability in respect of errors or information that was found to be incorrect or for any reliance the user may place on it.

ANDREWS FASTENERS LTD
Unit 8, Latchmore Park, Latchmore Road, Leeds, LS12 6DN, West Yorkshire, United Kingdom
+44 (0) 113 246 9992 | sales@andrewsfasteners.uk | www.andrewsfasteners.uk