

PROPOSED PLAN

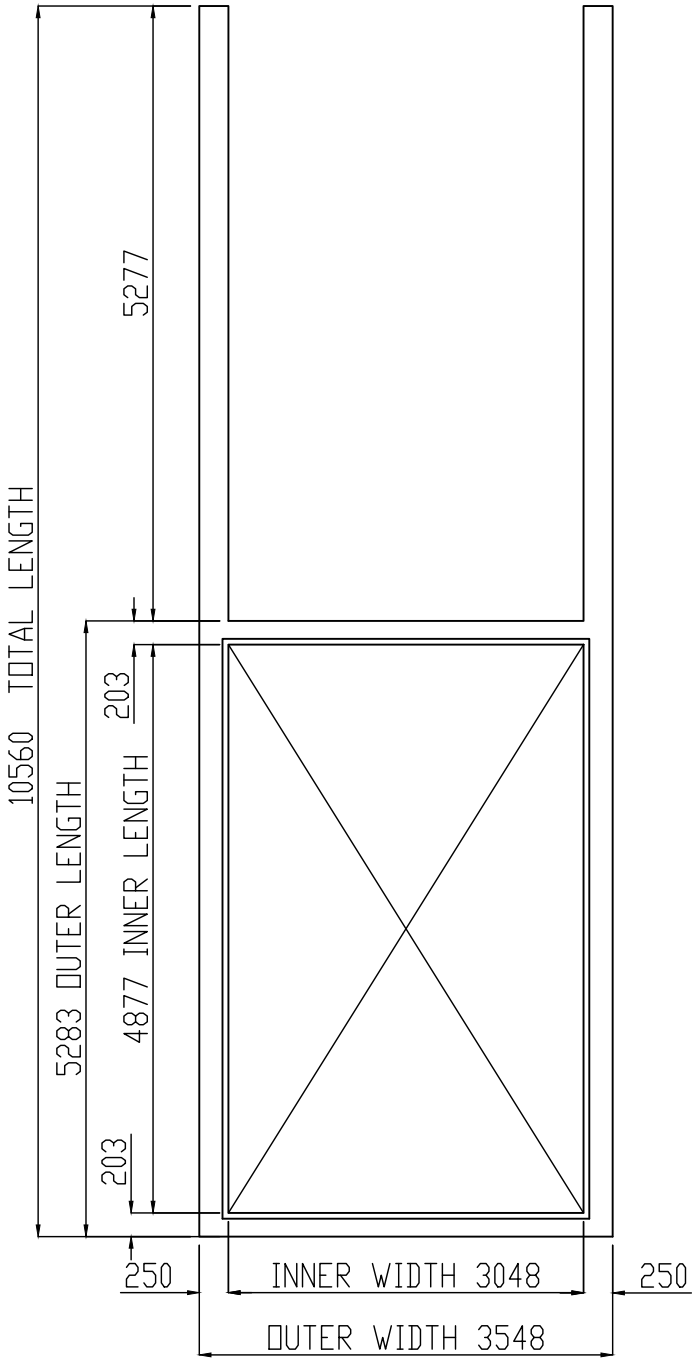

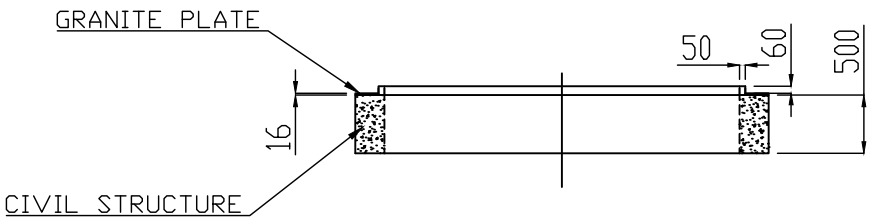

1. THE STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE OF GRANITE 16MM FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 80MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. AL PROFILE - POWDER COATED
6. GASKET - EPDM
7. MOTOR - ITALIAN/GERMAN MAKE
8. ELECTRICAL REQUIREMENT - .
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK IS IN CLIENT SCOPE

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: PROPOSED PLAN LAYOUT			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE
DRAWN	H. B.		10.04.2023
CHECK	P. M.		
APPRD.	V. T.		
CLIENT -			
LOCATION -			
PRODUCT - RETRACTABLE ROOF			
If any queries contact : support@autonation.com	NIHVA\22-23\02XX		REV-
ALL DIMENSION ARE IN mm	SCALE:NTS		SHEET: