



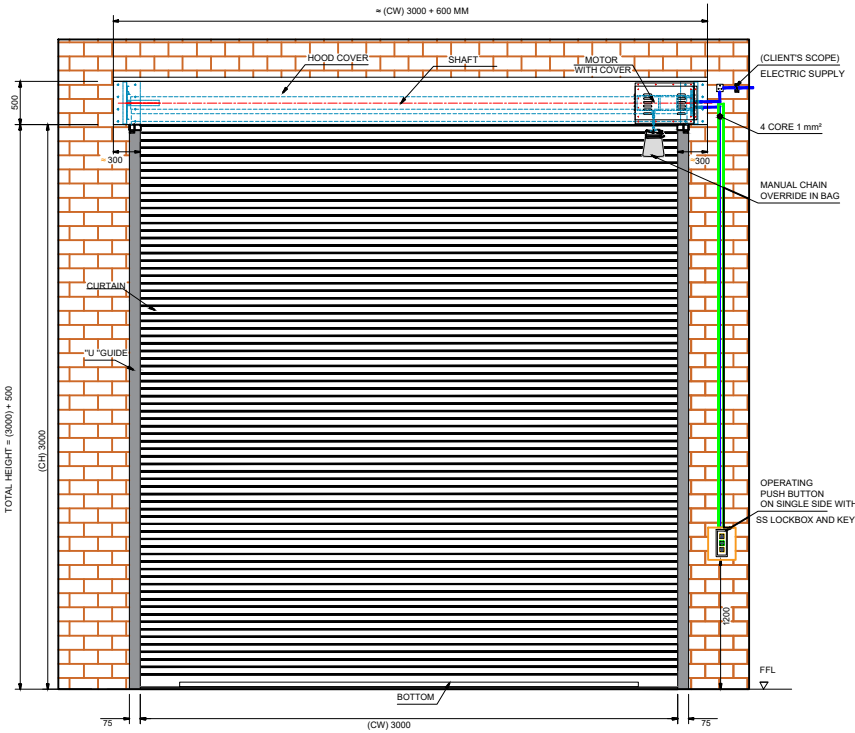

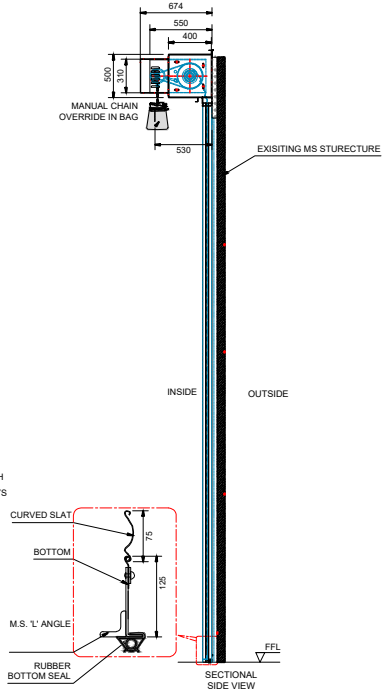

INSIDE ELEVATION

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside
3.	Mounting Surface	Side Brackets: MS Steel
4.	Slat	Curved 75 mm GI Sheet - 1.0 mm Thk
5.	Bottom Profile	MS Plate 100 x 2.5 mm thick with Angle Stiffner with rubber seal
6.	Guide Profile	M.S." U " Shape profile 75 x 2.5 mm Thk.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Surface finish	Fire Retardant Paint
9	Accessories	Push Button Single side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3000 mm	3000 mm	24

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	S.J	28/06/2024	CLIENT - PANCHSHIL
CHECK	B.B	28/06/2024	PROJECT - ROLLING SHUTTER
APPROVAL	V.T.	28/06/2024	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/PHL/240601 REV-00
			SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com