

JEDEC
SOLID STATE PRODUCT
OUTLINES



TITLE
3 LEAD FLANGE MOUNTED
CERAMIC POWER PACKAGE
R-CSFM-T3

ISSUE
A

DATE
JUNE 1993

TO-265

SHEET 1 OF 3

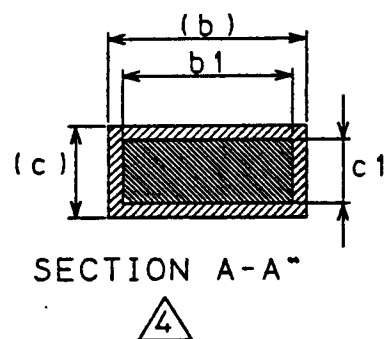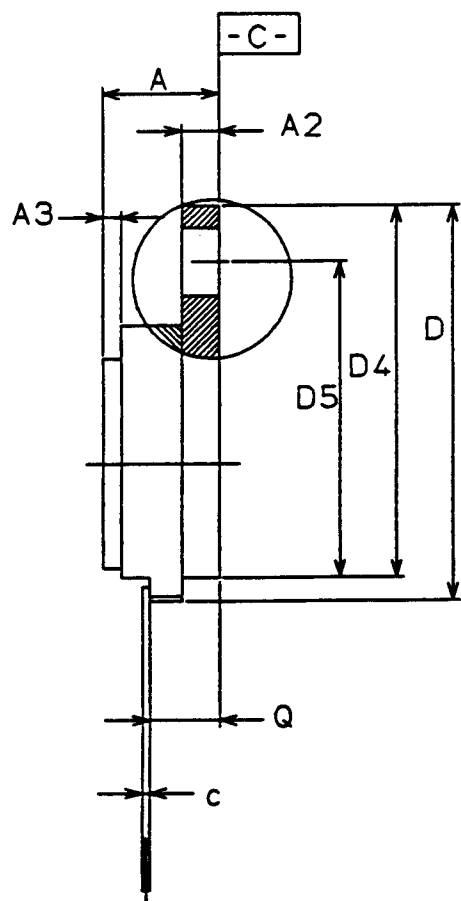

VARIATION AB

- NOTES: 1. REFER TO APPLICABLE SYMBOL LIST.
 2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
 3. ALL DIMENSIONS IN INCHES.
 4. SECTION A-A' APPLIES IN L2.

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE 3 LEAD FLANGE MOUNTED CERAMIC POWER PACKAGE R-CSFM-T3	ISSUE A	DATE JUNE 1993	TO-265
				SHEET 2 OF 3

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)											
	AA			NOTE	AB			NOTE				NOTE
	MIN.	NOM.	MAX.		MIN.	NOM.	MAX.		MIN.	NOM.	MAX.	
A	.215	.240	.265		.215	.240	.265					
A1	.035	.040	.045		—	—	—					
A2	.075	.080	.085		.075	.080	.085					
A3	.027	.032	.037		.027	.032	.037					
b	.038	.040	.042		.038	.040	.042					
b1	.038	.040	.041		.038	.040	.041					
b2	.058	.060	.062		.058	.060	.062					
c	.014	.015	.017		.014	.015	.017					
c1	.014	.015	.016		.014	.015	.016					
D	.835	.845	.855		.835	.845	.855					
D1	.580	.590	.600		.580	.590	.600					
D2	.530	.540	.550		.530	.540	.550					
D3	.445	.450	.455		.445	.450	.455					
D4	.790	.795	.800		.790	.795	.800					
D5	.670	.675	.680		.670	.675	.680					
D6	.515	.520	.525		—	—	—					
D7	.060	.070	.080		.060	.070	.080					
E	.530	.540	.550		.530	.540	.550					
E1	.495	.500	.505		.495	.500	.505					
E2	.455	.460	.465		.455	.460	.465					
e		.150BSC				.150BSC						
e1		.170BSC				.170BSC						
L	.610	.622	.634		.610	.622	.634					
L2	.340	—	—	4	.340	—	—	4				
N	—	3	—		—	3	—					
øP	.139	.144	.149		.139	.144	.149					
Q	.135	.150	.165		.135	.150	.165					
Θ		60°REF				60°REF						
NOTE	1, 2, 3, 4				1, 2, 3, 4							
REF	10-309				10-309							
ISSUE	A				A							
JEDEC SOLID STATE PRODUCT OUTLINES			TITLE 3 LEAD FLANGE MOUNTED CERAMIC POWER PACKAGE R-CSFM-T3				ISSUE A		DATE JUNE 1993		TO-265	
											SHEET 3 OF 3	