

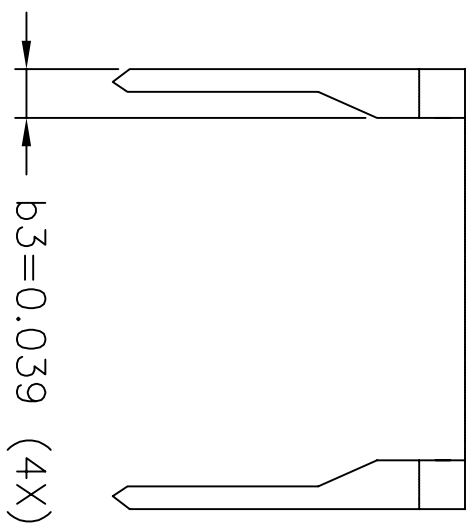


REVISION HISTORY				
REV.	DISCRIPTION	DATE	APP'D	
A	DRAWING ORIGINATION	04/26/06	JL	
B	CHANGE DRAWING LOGO AND COMPANY NAME	11/28/07	JL	


REMARKS:
FOR 8LD AND 16LD
ALL END LEADS (4X)
ARE HALF LEAD TYPES

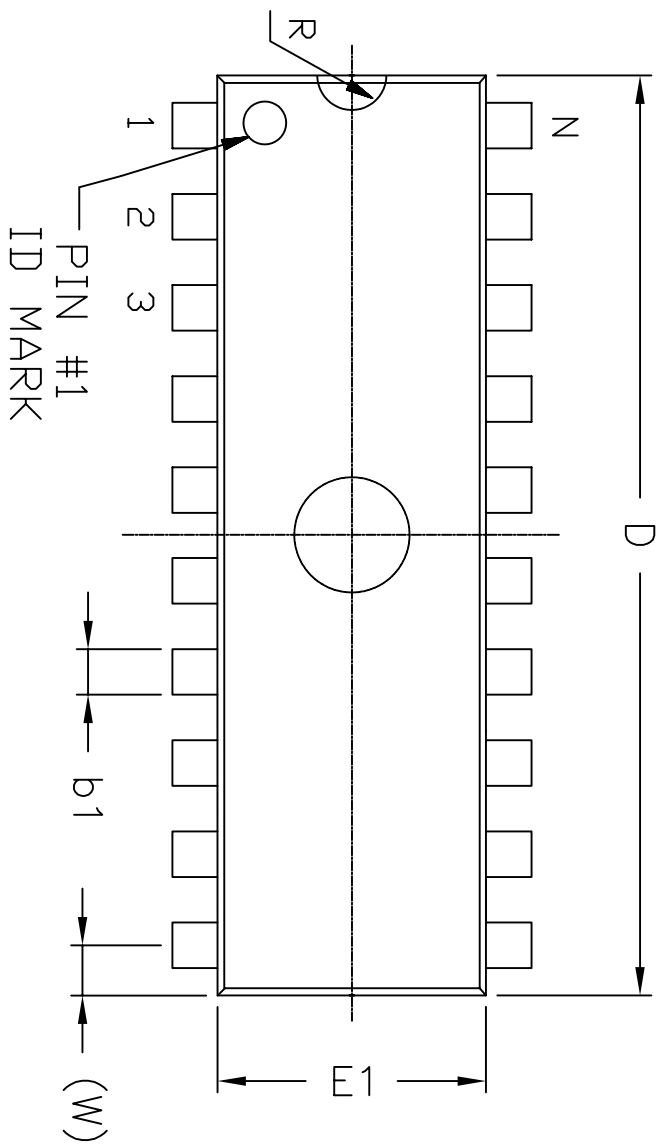

Top View

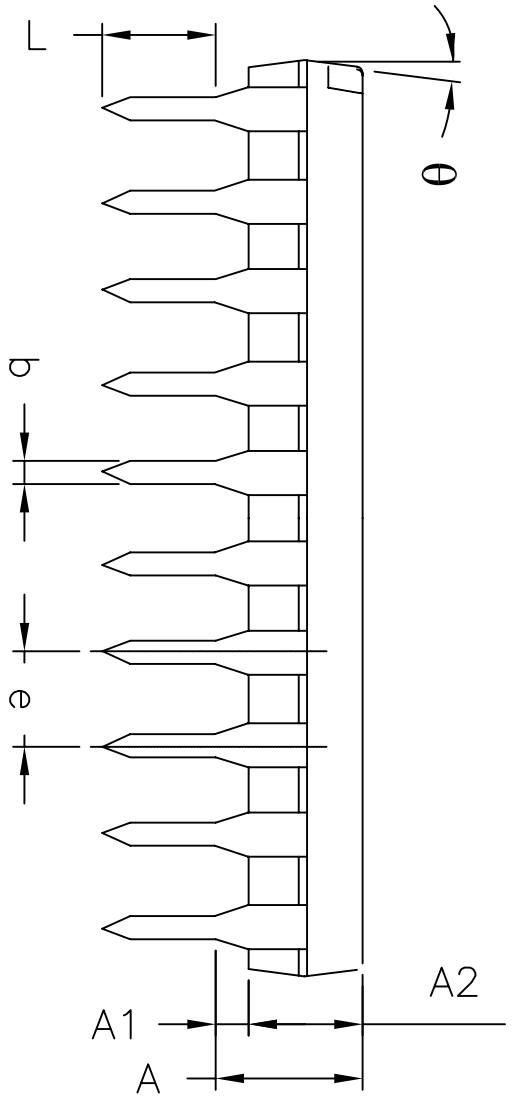


Side View

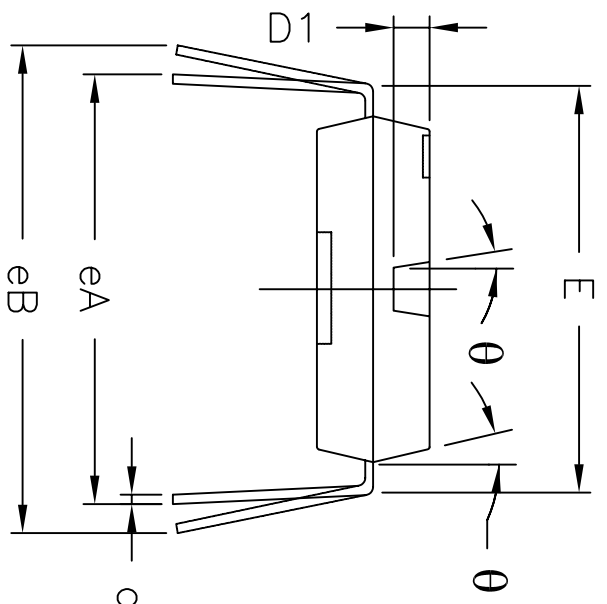

Front View

28 Pin PDIP JEDEC MS-011 Variation AB

SYMBOLS	DIMENSIONS IN INCH (Control Unit)			DIMENSIONS IN MM (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	—	—	0.250	—	—	6.35
A1	0.015	—	—	0.39	—	—
A2	0.125		0.195	3.18		4.95
b	0.014		0.022	0.36		0.56
b1	0.030		0.070	0.77		1.77
c	0.008		0.015	0.20		0.36
D1	0.030	—	0.060	0.76	—	1.52
E	0.600		0.625	15.24		15.87
E1	0.485		0.580	12.32		14.73
e	0.100 BSC			2.54 BSC		
eA	0.600 BSC			15.24 BSC		
eB	—	—	0.700	—	—	17.78
L	0.115		0.200	2.93		5.08
W	0.075 REF			1.91 REF		
R	0.030 BSC			0.76 BSC		
theta	4°	7°	10°	4°	7°	10°
D	1.380		1.565	35.10		39.70
N	28			28		



Powering Connectivity

EXAR CORPORATION

Packaging Approval:

28 PIN PDIP PACKAGE OUTLINE

Drawing No:

28-PIN PDIP

By: JL

Date: 11/28/07

Revision: B

Sheet: 1 OF 1