


SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN MM)											
	AA		NOTE									
	MIN.	MAX.										
A	6.09	6.85										
A ₁	.88	1.14										
A ₂	3.55	BSC.										
Ø _b	1.39	1.65										
D	20.70	21.20										
D ₁	13.46	13.97										
D ₃	.00	2.33										
e	5.08	BSC.										
E	17.39	17.65										
L	12.70	19.05										
O	17.70	17.95										
ØP	3.93	4.19										
NOTE	1, 2, 3, 4											
REF.												
ISSUE												
			TITLE: HERMETIC FLANGE MOUNTED HEADER FAMILY (PERIPHERAL TERMINALS) THREE LEAD. 5.08 SPACING				ISSUE: A		DATE: 2-88		T0-258	

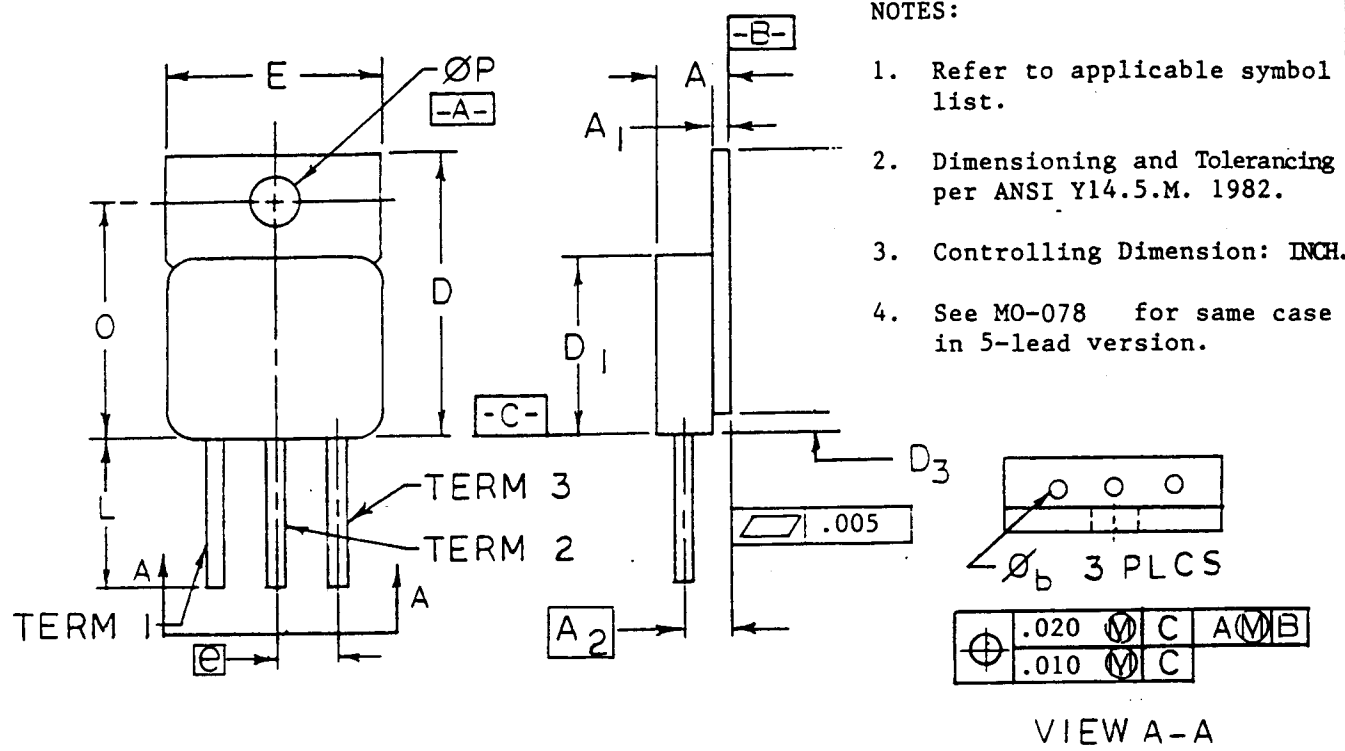

NOTES:

1. Refer to applicable symbol list.
2. Dimensioning and Tolerancing per ANSI Y14.5.M. 1982.
3. Controlling Dimension: INCH.
4. See MO-078 for same case in 5-lead version.

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)											
	AA		NOTE									
	MIN.	MAX.										
A	.240	.270										
A ₁	.035	.045										
A ₂	.140 BSC.											
Ø _b	.055	.065										
D	.815	.835										
D ₁	.530	.550										
D ₃	.000	.092										
e	.200 BSC.											
E	.685	.695										
L	.500	.750										
O	.697	.707										
ØP	.155	.165										
NOTE	1, 2, 3, 4											
REF.	ITEM 10-251											
ISSUE												
			TITLE: HERMETIC FLANGE MOUNTED HEADER FAMILY (PERIPHERAL TERMINALS) THREE LEAD, .200 SPACING			ISSUE: A		DATE: 2-88		T0-258		