HOW TO USE THE 3-IN-1 DRAWER INSTALLATION JIGS

Bambu Stand 3D Printer Storage Workbench • 18" Full-Extension Slides • 1/2" Birch Boxes • 3/4" Walnut Faces

COMPLETE 3-JIG SYSTEM

JIG 1: SLIDE SETBACK CRADLE (CABINET CARCASS MOUNTING)

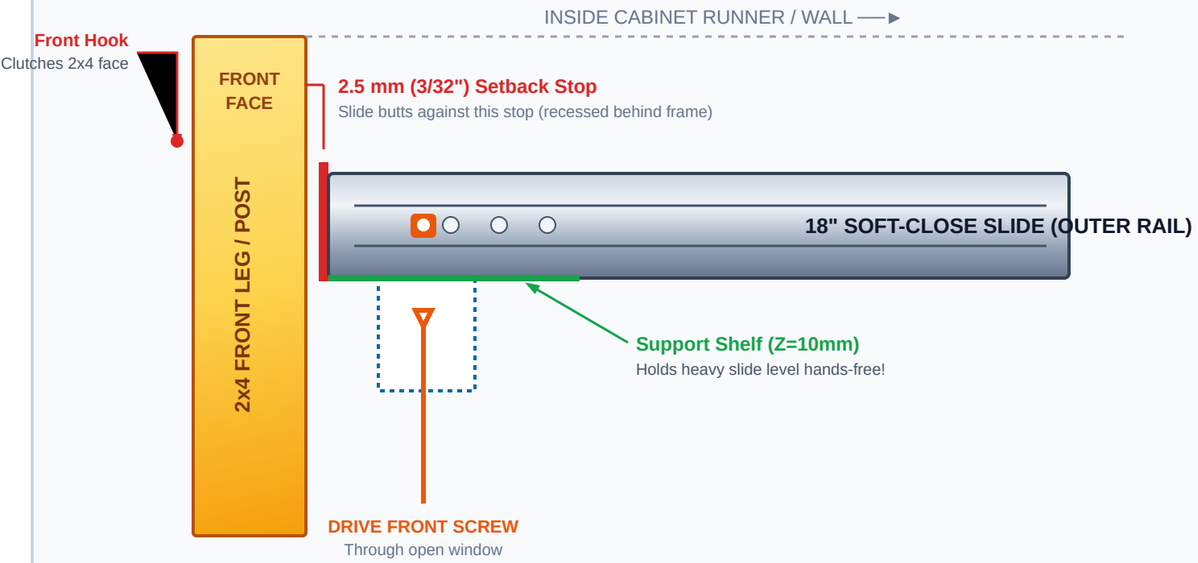

JIG 2: DRAWER BOX MOUNTING BLOCKS (BENCH ASSEMBLY)

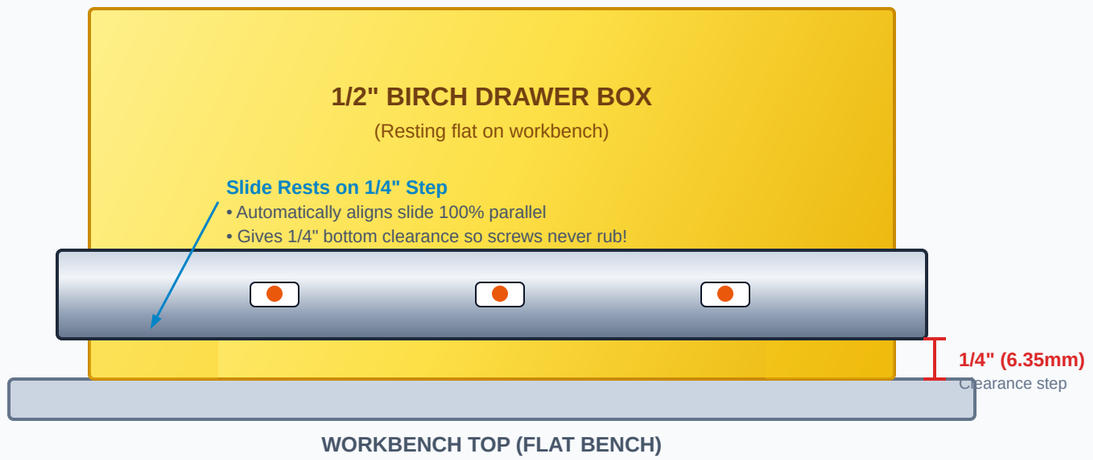

USE BOTH BLOCKS: One at front, one at rear of drawer box

JIG 3: 1/8" REVEAL SHIMS (DRAWER FRONT INSTALLATION)

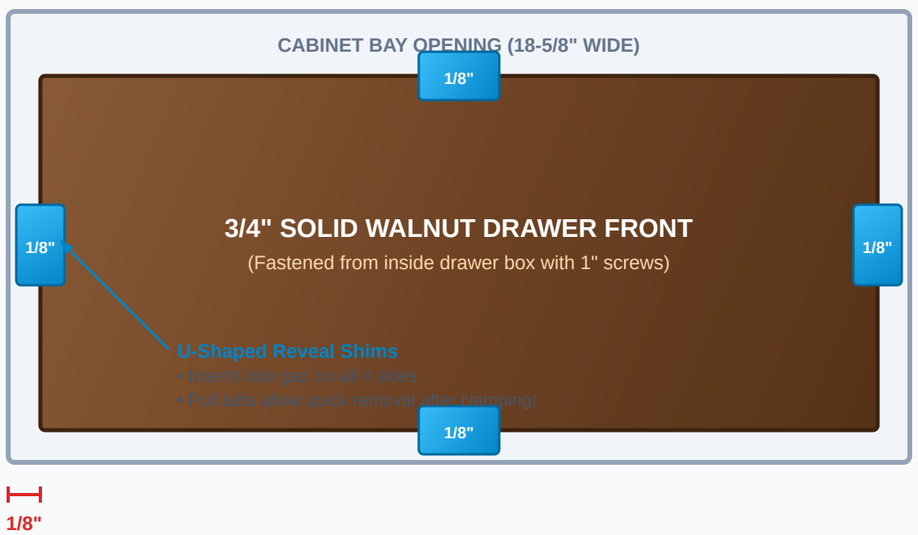

PERFECT 1/8" (3.18mm) GAP AROUND ENTIRE PERIMETER

COMPLETE 4-STEP DRAWER INSTALLATION WORKFLOW

1. **Install Cabinet Carcass Slides (Jig 1)**
   Hook the **Setback Cradle** over the front 2x4 leg. Rest the 18" outer slide on the shelf against the 2.5mm stop. Drive front screw t
2. **Mount Slide Rails to Drawer Boxes (Jig 2)**
   Set your 1/2" Birch drawer box on the bench. Place the pair of **Mounting Blocks** under the slide. Drive screws into the side of the
3. **Click Drawer Box into Cabinet & Test Glide**
   Align drawer box rails into the cabinet slide tracks and push firmly until the soft-close mechanism clicks. Test the full 18" extensio
4. **Mount 3/4" Walnut Faces with 1/8" Reveals (Jig 3)**
   Insert the four **1/8" Reveal Shims** into the perimeter gaps. Clamp the Walnut face to the drawer box with Quick-Grip clamps. Driv

PRO TIP: Pre-drill drawer face screw holes from inside the box with a 1/8" bit and depth tape flag (set flag to 1" total depth) to ensure screws never poke through the front of your Walnut!