# NVIDIA Jetson Al Certification Project

**Outdoor Cat-A-Logger** 

Deep Learning on an NVIDIA Jetson Nano Keeps
Track of Outdoor Cats Health, Movements and
Reproductive Status

### **Purpose**

Outdoor cats are present nearly everywhere in the world. Some regions allow them to roam freely, some want them vaccinated, and others want them to be spayed or neutered. Outdoor cats are notoriously difficult to track and manage without specialized equipment, personnel, training, and procedures.

This project proposes a solution using Deep Learning to keep track of outdoor cats. It can distinguish cats from other objects and ultimately allow the user to track metadata on individual cats.

Metadata can include but is not limited to: The coming and goings of a particular cat over time, their vaccination, health, and reproductive status.

### The Problem

Deep Learning can be used to distinguish cats from other critters, objects, and noise. A model can also be trained to recognize individual cats, but there are no publicly available models of cats taken with a night vision camera nor are their publicly available images with which to train such a model.

Images need to be generated, found, collected, or otherwise captured in order to train the model.

We had to bootstrap the model with a small dataset and build it up over time. The Jupyter Notebooks and Datasets are publicly available on Kaggle.

# Today's State of the Art Motion Detection

The initial thought to gather images was to use the Night Vision Cameras built-in motion detection to grab images of cats.

Retail Motion Detection Cameras are virtually useless because they tend to trigger on almost anything.

They are getting better at detecting people which makes them more useful, but that does not help with our cat imaging problem.

Another solution was needed.

### The Solution

Build a model from publicly available images of cats and attempt to simulate images taken by a Night Vision Camera hoping to "trick" the initial model into recognizing images of cats at night. The original dataset was created as follows:

- Crop publicly available daylight images extracting only cats
- Convert the images to black and white
- Invert the colors to make them negative images
- Enhance the images by randomly sizing, skewing and adding noise

To make a larger more robust dataset, the entire set of source, intermediate, and final images were randomly paired with random backgrounds which were randomly augmented. The program also created metadata such as bounding boxes and labels to inform the model where the cats are in the composited images

# **Bootstrapping the Initial Model**

- Used the previously created composite images along with their bounding boxes and metadata to train an initial model
- Tested the model against images taken with a night vision camera such as a Deer Cam or whatever was available
- Manually went through each detected image and approve or reject it
- Manually went through each image rejected by the model and create metadata if it is a positive hit which originally went unrecognized by the model
- Trained the model again using all of the collected images
- Iterated these steps until sufficient images were collected and the desired level of inference accuracy achieved

# Model Choice (TBD)

#### **Jetson Nano Benchmarks**

Model Name	FPS
inception_v4	10.6
vgg19_N2	10.1
super_resolution_bsd500	15.3
unet-segmentation	16.8
pose_estimation	14.6
yolov3-tiny-416	47.9
ResNet50_224x224	36.9
ssd-mobilenet-v1	42.7

# **Cat Box Description**

To capture images of cats, a unit was built to house a night vision capable camera and a Wifi-based monitoring system. The cats were baited in order to get them to come close to the Cat Box for imaging.

The unit is portable, wireless, and can be moved to various locations as needed. Currently, the system requires Wifi but could support embedded cellular or satellite communications. The unit could be significantly miniaturized and made to be completely solar powered for remote operation.

To reduce bandwidth for cellular or satellite communications and AI Inference Device could be place inside of the Cat Box so it would only transmit pertinent data.

### **Cat Box BOM**


#### Outdoor Wifi Surveillance Camera

#### **Monitor & Trigger**

- ESP32 Read Sensors, Process and Communicate Status Data via Wifi
- Accelerometer Sense tampering and other excessive motion
- PIR Sensor Critter Detector: Tells the system to begin recording
- <u>Temperature & Humidity Sensors</u> Sense environmental parameters inside the Cat Box
- 12V Battery Voltage & Current Sensors Track the health and power usage of the battery

#### Power

- DC to DC Power Stabilizer for Camera
- DC to DC Power Converter for ESP32
- Deep Cycle Battery
- Battery Charger
- <u>Circuit Breaker</u>

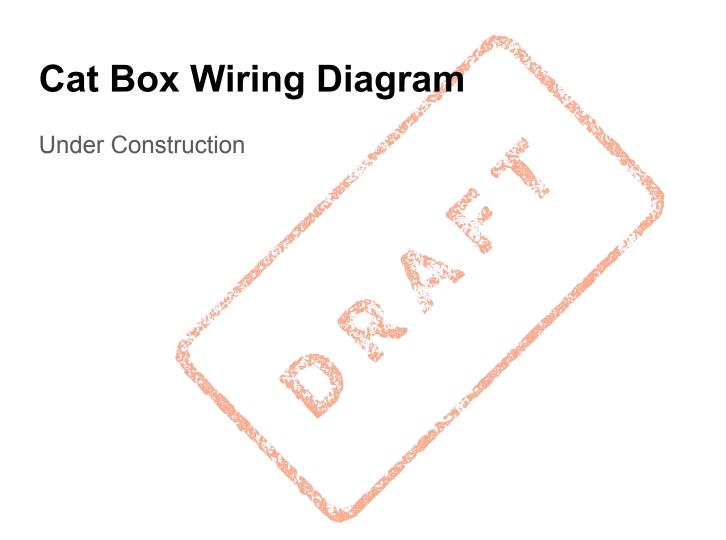

## Configuring the Inference Device

The NVIDIA Jetson was chosen as the Inference Device because of its relatively small size and low-cost to performance ratio

(Under Construction)

# First Time Setup for NVIDIA Jetson Nano

- Install Jetson Image and Perform Initial Setup
- Configure Jetson Inference by Dustin Franklin

This project follows "Building the Project from Source" Docker is also available Docker Container.

```
sudo apt-get update
sudo apt-get install git cmake libpython3-dev python3-numpy
git clone --recursive https://github.com/dusty-nv/jetson-inference
cd jetson-inference
mkdir build
cd build
cmake ../
make -j$(nproc)
sudo make install
sudo ldconfig
sudo apt autoremove
sudo nvpmodel -m 0
sudo jetson clocks ?
sudo apt remove --purge libreoffice* -v
sudo apt-get update
sudo apt-get clean -y
sudo apt autoremove -y
```

### **Pieces Parts**

- 4GB NVIDIA Jetson Nano
- 64GB microSDXC UHS-I Memory Card
- RTSP Capable Camera
- Power Supply 12V 4A (Minimum)
- Cooling Fan The unit gets hot while performing heavy processing
- Minimal Wifi Adapter Very slow and unreliable
- Better Wifi Adapter Seems like most adapters in this class work
- Internal Wiff Adapter This is probably good option especially when using a case
- Optional Case

# **Optional Software**

- PWM Fan Controller Service
- Jetson Stats
- Visual Studio Code (Use The ARM 64 Version for Debian)

### **Al Catter Waller**

Although most of the cats in this area are used to human contact, cats that are not used to human contact can inflict serious harm, can be difficult to capture, and carry the risk of Rabies. They are essentially wild animals and should be given a wide latitude.

They are notoriously difficult to capture because they are typically very wary. This Cat Trap uses Deep Learning to identify the desired subject and only closes the trap when that Cat enters. Otherwise, less wary cats who may have already been treated may trigger the trap making the target Cat even more wary of being walled in. <a href="mailto:caterwauler">caterwauler</a>

# Security

The items constructed for this project should not be considered secure

- In my case, the data not sensitive at all
- The cameras are access using a username and password which is passed as clear text over the wire
- The Cat Box Controllers uses a REST API on the Server which is not secure
- The only security is as a result of everything running on a separate Wifi Network from my Primary Network
- One can be reasonably assured a hacker could breach these devices and snoop or create havoc

### What's Next

There are a plethora of Deep Learning Edge Devices on the market and in the pipeline. For instance, the <u>OAK-1</u> backed by OpenCV, has a built in 4K Camera and can run Inferencing at 4 TFLOPS.

Using this device and others like it could reduce the size and complexity of this project tremendously. It has lower power requirements than the current solution and can run Deep Learning Inferencing right on the device without the need for an external server.

As of the time of this writing, it is not yet shipping. Also, it would need to be paired with a Night Vision Capable Camera and made to be weatherproof.

Stay tuned...

### **Credits**

#### **Example Software & Configurations Referenced**

- Kaggle Thanks to everyone for making their notebooks and datasets publicly available
- <u>Dustin Franklin</u>
- Adrian Rosebrock
- Maintainers of OpenCV, NumPy, Pillow, and the other numerous libraries without which this project would have not been possible

#### **Initial Cat Datasets**

- Kaggle: Cat VS Dog Dataset
- Cats and Dogs Breeds Classification Oxford Dataset

#### Initial Background Datasets

- Messy vs Clean Room
- 15-Scene Dataset
- Qutub Complex Monuments' Images Dataset