


APPARELWERKS

Pattern DXF file inspection and ASTM D6673 compliance evaluation

MYRA SHIRT_astm.dxf

Analyzed 24 September 2026

Detected format	ASTM D6673 (high confidence)
Checked against	D6673-04 (declared by the file)
Producer	GERBER TECHNOLOGY · ACCUMARK · 8.4.0
Style name	MYRA SHIRT
Sample size	2XL

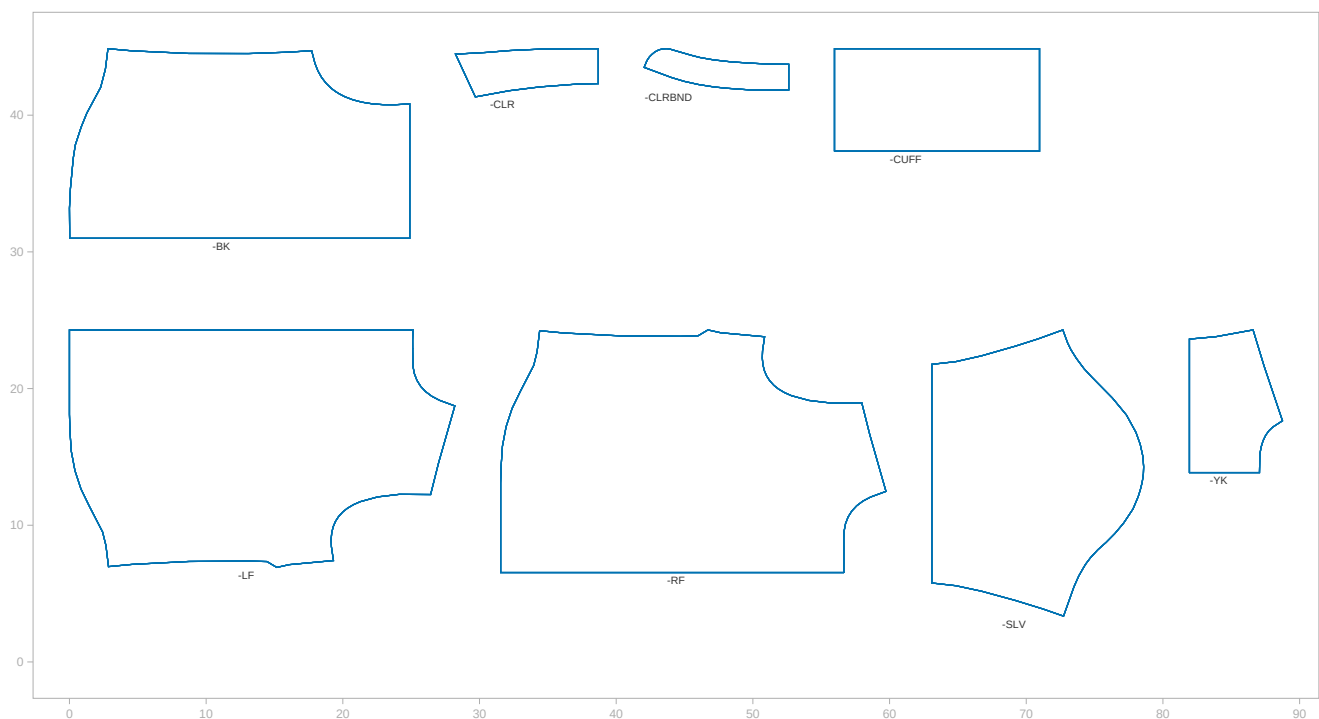

All pieces, rearranged to fit on the page.

The file's owner can view all information for MYRA SHIRT_astm.dxf at <https://aw.fyi/dxf>. This report includes 47 of the 630 available analysis images.

Overview

Units	ENGLISH — read as inches
Curve tolerance	.006
Encoding	not declared
Extents	1034.45 × 20.94
Unit check	declared ENGLISH; largest piece 28.2 x 17.8 — geometry consistent with inches

Layers


56 block definitions; modelspace holds 56 placements and 8 direct entities.

Layer	Meaning	Msp ent	Msp ins	Blocks	Blk ent	Types
1	Boundary / cut line	8	56	56	259	ATTDEF, POLYLINE, TEXT
2	Turn points	—	—	8	271	POINT
3	Curve points	—	—	7	305	POINT
5	Grade reference	—	—	56	56	LINE
6	Mirror / fold line	—	—	28	28	LINE
7	Grain line	—	—	56	56	LINE
8	Internal lines (draw/ink/sew)	—	—	28	56	LINE, TEXT
11	Internal cutouts	—	—	7	7	POLYLINE
13	Drill holes	—	—	14	16	POINT, TEXT
14	Sew lines	—	—	56	399	POLYLINE, TEXT
80	T-notch (ASTM)	—	—	8	76	POINT, TEXT
84	Boundary validation (ASTM)	—	—	56	56	POLYLINE
85	Internal line validation (ASTM)	—	—	28	56	POLYLINE, TEXT
86	Cutout validation (ASTM)	—	—	7	7	POLYLINE
87	Sew line validation (ASTM)	—	—	56	336	POLYLINE
100		—	—	56	56	LINE

Degenerate geometry (reported, not altered)

- collapsed polylines: 112 POLYLINES on layers 14 (56), 87 (56)
- duplicate consecutive vertices: 882 vertices in 238 polylines, on layers 1 (343), 14 (98), 84 (343), 87 (98)

These layer renderings present all data from each layer, drawn as a horizontal sequence to make information for each pattern piece more readable. Actual coordinates may stack all pieces at a common origin. In a graded file, non-sample-size pieces will not have data in all layers.



Layer 1 - Boundary / cut line



Layer 2 - Turn points



Layer 3 - Curve points



Layer 5 - Grade reference



Layer 6 - Mirror / fold line



Layer 7 - Grain line



Layer 8 - Internal lines (draw/ink/sew)



Layer 11 - Internal cutouts



Layer 13 - Drill holes



Layer 14 - Sew lines



Layer 80 - T-notch (ASTM)



Layer 84 - Boundary validation (ASTM)



Layer 85 - Internal line validation (ASTM)



Layer 86 - Cutout validation (ASTM)



Layer 87 - Sew line validation (ASTM)



Layer 100 - no ASTM meaning assigned

ASTM D6673 Compliance

6 departures, 5 extensions, 5 advisories

Rules evaluated	69
Not applicable	38
Advisories	5

Findings

departure

File is not DXF R13

DXF version is absent (no \$ACADVER on disk); the standard specifies AutoCAD Version 13 (AC1012).

ASTM D6673 §1.2 / 4.1 (revised from AAMA-292 §2)

departure

Grade Rule Table identifier missing

Required 'Grade Rule Table' identifier is absent.

ASTM D6673 §4.3.1.1 (since AAMA-292 §4.2.1.2)

departure

Graded sizes use 'Size' instead of 'Size Name'

56 of 56 graded-size blocks (first: -RF) carry the size under 'SIZE' – the ANSI/AAMA-292 §4.2.1.5.2 identifier; D6673-01 renamed it 'Size Name' (§4.3.1.5.1) and identifiers must appear as specified (§4.3.1.1).


ASTM D6673 §4.3.1.5.1 (revised from AAMA-292 §4.2.1.5.2)

departure


Declared points miscategorized

Block SLV_2XL: 10 of 97 declared points are miscategorized (§4.3(2)/(3)) — 4 curve points shown as turn points on layer 2 and 6 points on a straight segment. 4 other pieces also have miscategorized points.

ASTM D6673 §4.3 (revised from AAMA-292 §4.2.2 / 4.2.3)

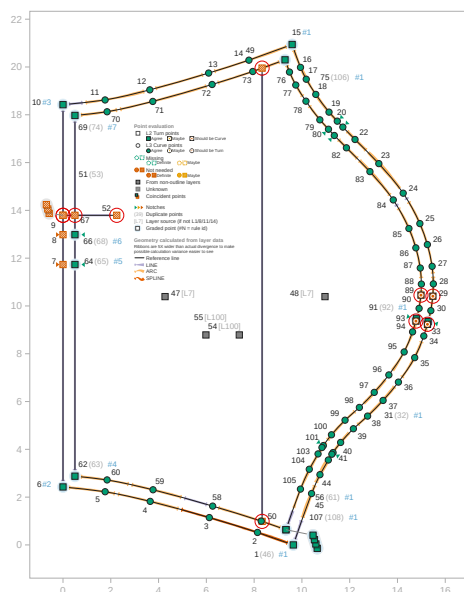


Evidence – SLV_2XL

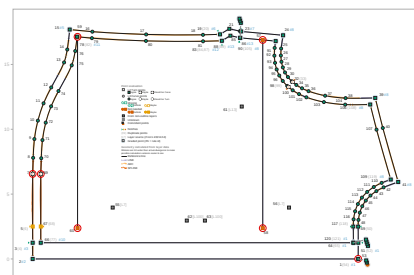


RF 2XL

7 points miscategorized

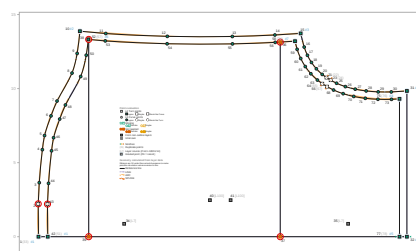


BK 2XL

6 points miscategorized

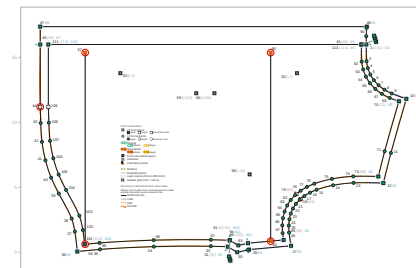

LF 2XL

5 points miscategorized

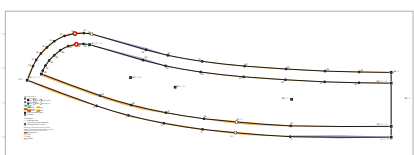

CLRBN2XL


2 points miscategorized

departure


Declared points not on a cut, sew, or internal line

Block RF_2XL: 5 declared layer-2/3 points do not lie on the cut boundary, an internal line, a cutout, or the sew line (layers 1, 8, 11, 14), so do not qualify as turn or curve points (§4.3.2/§4.3.3). These points lie on the grain line (layer 7) or layer 100 or are drill holes (layer 13). 7 other pieces have similar points.

ASTM D6673 §4.3.2 / 4.3.3 (revised from AAMA-292 §4.2.2 / 4.2.3)

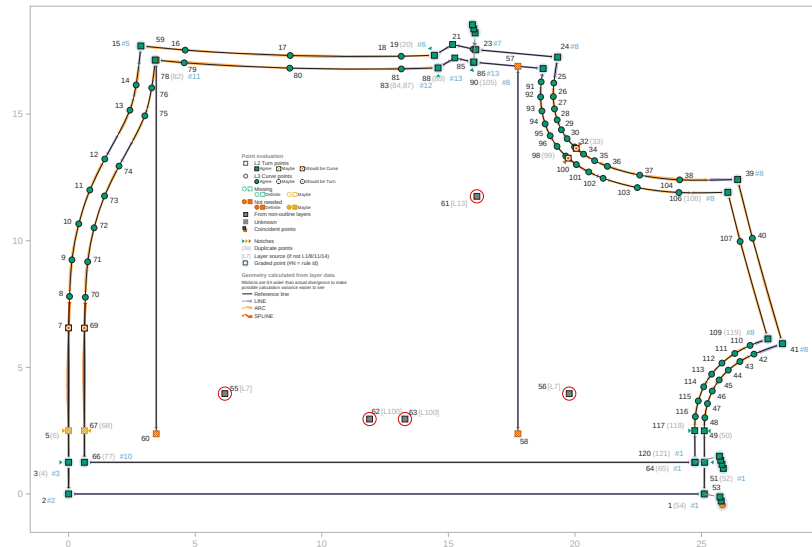


Evidence — RF_2XL

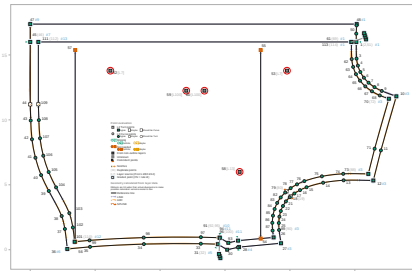


LF_2XL

5 points off any outline

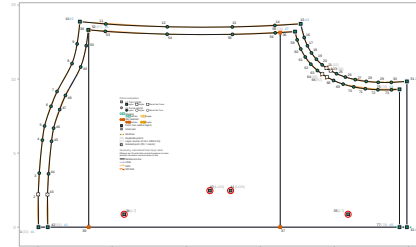


BK_2XL

4 points off any outline

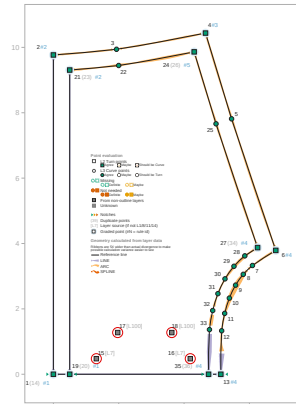


YK_2XL

4 points off any outline

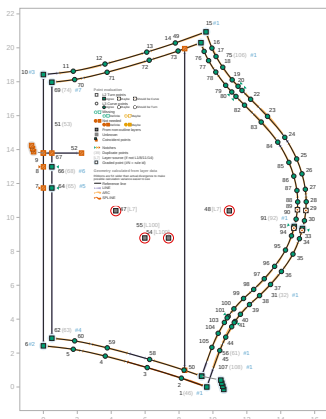


SLV_2XL

4 points off any outline

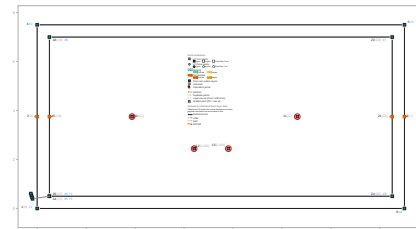


CUFF_2XL

4 points off any outline

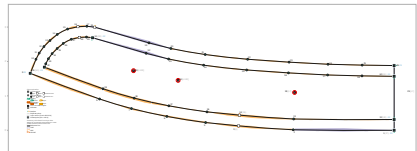

CLRBND_2XL

4 points off any outline

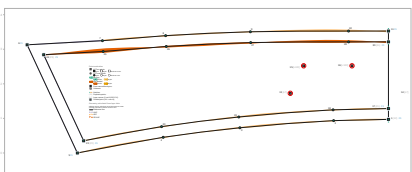

CLR_2XL


4 points off any outline

departure


Notch points declared on turn/curve layers

Block BK_2XL: 4 declared layer-2/3 points are there only as notch bases — no turn or curve justifies the declared type, and a notch coincides (4 adjacent in the point sequence). §4.3.1 enumerates notch base points as their own class, distinct from turn and curve points, so they don't belong on either point layer. 5 other pieces have similar points.

ASTM D6673 §4.3.1 (revised from AAMA-292 §4.2.2 / 4.2.3)

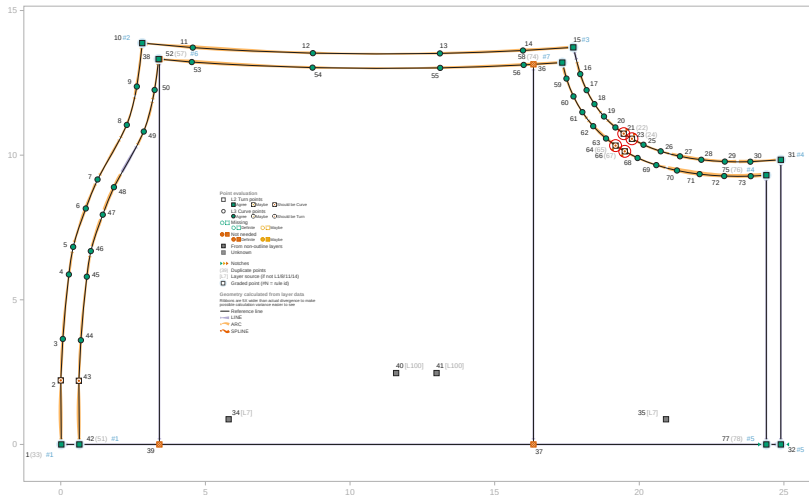


Evidence — BK_2XL

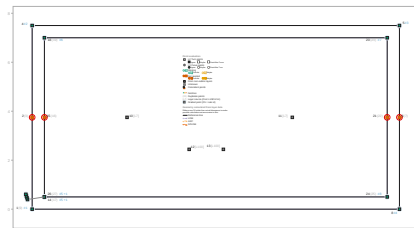


CUFF_2XL

4 points there only as notch bases

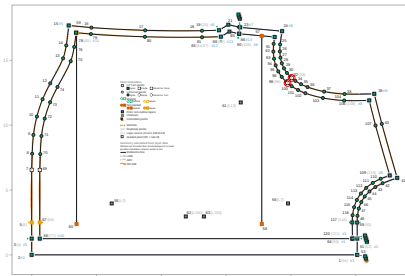

RF_2XL

2 points there only as notch bases

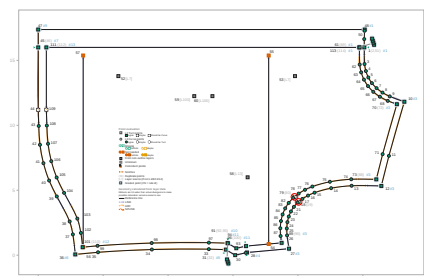

extension

Reconstructed curve not within tolerance

Reconstruction from layers 2/3 deviates 0.0154" from layer 84 in LF_2XL, exceeding 2x Curve Tolerance (0.0120" (2x 0.006)).

ASTM D6673 §4.3.1.1 / 4.3.3

extension

Reconstructed sew lines not within tolerance

Reconstruction from layers 2/3 deviates 0.0137" from layer 87 in LF_2XL, exceeding 2x Curve Tolerance (0.0120" (2x 0.006)).

ASTM D6673 §4.3.1.1 / 4.3.3

extension

Layers outside the spec vocabulary

Layer 100 (56 entities) is not defined by D6673 — an extension/excursion.

ASTM D6673 §4.3 (revised from AAMA-292 §4.2)

extension

Unrecognized system-text identifiers

3 system-text identifiers not defined by D6673: 'SIZE', 'ANNOTATION', 'CATEGORY' — an extension/excursion (permitted as optional text).

ASTM D6673 §4.3.1.1 (revised from AAMA-292 §4.2.1.2)

extension

ANSI/AAMA-292 piece-text identifiers

3 ANSI/AAMA-292 piece-text identifiers present: 'SIZE', 'CATEGORY', 'ANNOTATION'. 'Size' is AAMA §4.2.1.5.2 (renamed 'Size Name' in D6673-01); 'Category' and 'Annotation' are AAMA §4.2.1.3 (annotation moved to layer 15 in -01; category left the piece-text table). Values are recorded as written, not interpreted.

ASTM D6673 §4.3.1.2

advisory

L84 densification profile (advisory)

Validation layers 84 and 87 add intermediate points on 217 of 392 boundary polylines. 1 piece carries no added points anywhere — either it contains no curves, or its intended shapes may need attention: sparse point sequences fittable as either arcs or facets cannot be distinguished from the data, and declared point types are taken as given — CUFF_2XL.

Advisory — no conformance weight.

ASTM D6673 §4.3.3.1

advisory

Validation polylines that validate nothing (witnessed)

56 of the 336 Layer 87 (Sew line validation) polylines across 56 pieces span no curve segment (each has only one distinct vertex), so they validate nothing. Each mirrors a collapsed polyline on Layer 14 (Sew lines) — the validation layer copied a degenerate source rather than losing anything. Layer 87 carries one entity for every Layer 14 (Sew lines) entity in every piece: 336 each. Advisory — the standard sets no minimum vertex count, so this carries no conformance weight.

ASTM D6673 §4.3.3.1

advisory

Validation curves can honor the declared Curve Tolerance

Every smooth validation-curve chord's implied mid-chord sagitta is within 2x Curve Tolerance (3955 chords measured; worst 0.0089").

ASTM D6673 §4.3.1.1 / 4.3.3.1

advisory

Inert NM on layer 8 (internal lines)

Inert 'NM' on layer 8 in RF_2XL: no layer-6 mirror line, so the marking is a no-op.


ASTM D6673 §4.3.8 (since AAMA-292 §4.2.8)

advisory


Possible point miscategorization

Block RF 2XL: 2 declared points may be miscategorized. 2 other pieces may also have miscategorized points.

ASTM D6673 §4.3 (revised from AAMA-292 §4.2.2 / 4.2.3)

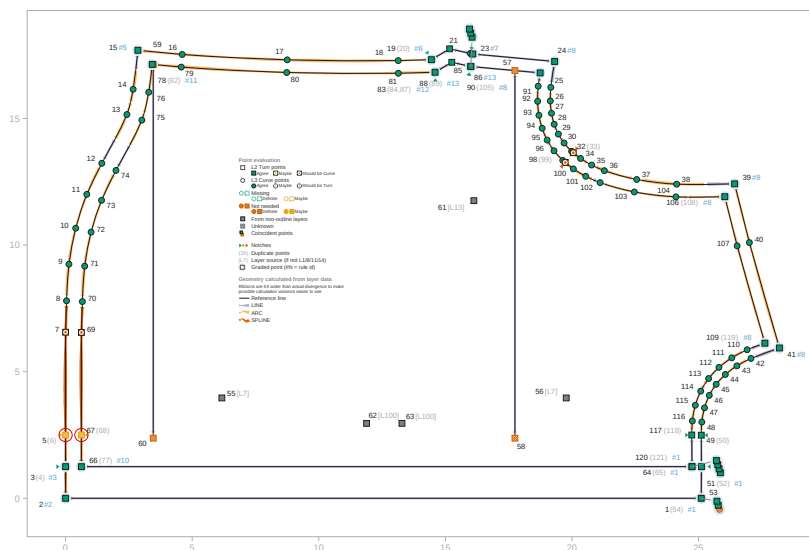


Evidence – RF_2XL

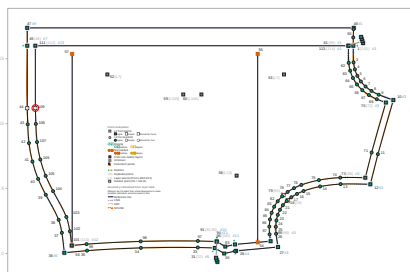

LF_2XL

1 point may be miscategorized

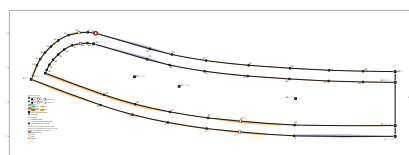

CLRBNBND_2XL


1 point may be miscategorized

Pattern Pieces


Piece	Category	Annotation	Material	Quantity	Sizes	Bounding box	Area
RF	R FRONT	CUT 1		0,1	XS, S, M, L, XL, 2XL , 3XL	28.19 × 17.75	415.0
LF	L FRONT	CUT 1		0,1	XS, S, M, L, XL, 2XL , 3XL	28.19 × 17.38	405.6
BK	BACK	CUT 1		0,1	XS, S, M, L, XL, 2XL , 3XL	24.89 × 13.87	303.2
YK	YOKE	CUT 2		0,2	XS, S, M, L, XL, 2XL , 3XL	6.81 × 10.44	56.9
SLV	SLEEVE	CUT 1 PAIR		1,1	XS, S, M, L, XL, 2XL , 3XL	15.5 × 20.94	240.7
CUFF	CUFF	CUT 2		0,2	XS, S, M, L, XL, 2XL , 3XL	15.0 × 7.5	112.5
CLRBND	BAND	CUT 2 FUSE 1		0,2	XS, S, M, L, XL, 2XL , 3XL	12.77 × 3.03	19.7
CLR	COLLAR	CUT 2 FUSE 1		0,2	XS, S, M, L, XL, 2XL , 3XL	12.6 × 3.53	27.6

Piece outlines


These images are composites of all available layer data for each sample-size (2XL) pattern piece. The file owner can see a flipbook with separate per-piece images of each layer for all pieces at <https://aw.fyi/dxf>.




RF · 2XL




LF · 2XL




BK · 2XL




YK · 2XL




SLV · 2XL



CUFF · 2XL



CLRBND · 2XL



CLR · 2XL

About this report

The electronic version of this file is stored securely for up to 30 days and used only to improve this service and understand failures. We do not share this file with anyone other than the requestor. The application that created this document does not expose source .dxf files to any LLM or other AI agent; all processing is purely computational, using a private, proprietary codebase.

This document is provided by ApparelWerks LLC, for instructional and research purposes. While it contains section references to published versions of withdrawn standards ANSI/AAMA-292 and ASTM D6673, it does not reproduce the text of the standards. We've written all the observations about the standards and their contents, and paraphrased where necessary. This service is not affiliated with, sponsored by, or endorsed by ANSI or ASTM International. And finally, you shouldn't make any decisions based on the information you read here, without actually consulting the standards yourself.

Want to know more? Have suggestions to improve this? Email rick@apparelwerks.com.

Want to try this service on your own .dxf files? Go to <https://aw.fyi/dxf>