APPARELWERKS

Pattern DXF file inspection and ASTM D6673 compliance evaluation

## male_shirt_R13_202610112117.dxf

Analyzed 12 October 2026

| | |
|---|---|
| Detected format | ASTM D6673 (high confidence) |
| Checked against | D6673-10 (declared by the file) |
| Producer | Seamly · Seamly2D · 26.10.1115 |
| Style name | male_shirt |




All pieces.

The file's owner can view all information for male_shirt_R13_202610112117.dxf at https://aw.fyi/dxf. This report includes 34 of the 178 available analysis images.

# Overview

| | |
|---|---|
| DXF version | AC1012 |
| Units | METRIC — read as millimeters |
| Curve tolerance | 0.25 |
| Encoding | ANSI_1252 |
| Extents | 1199.46 × 1355.88 |
| Unit check | declared METRIC; largest piece 393.1 x 766.9 — geometry consistent with millimeters |

## Layers


17 block definitions; modelspace holds 17 placements and 9 direct entities.

| Layer | Meaning | Msp ent | Msp ins | Blocks | Blk ent | Types |
|---|---|---|---|---|---|---|
| 1 | Boundary / cut line | 9 | 17 | 17 | 85 | POLYLINE, TEXT |
| 2 | Turn points | — | — | 17 | 156 | POINT |
| 3 | Curve points | — | — | 11 | 303 | POINT |
| 4 | Notches | — | — | 3 | 7 | POINT |
| 7 | Grain line | — | — | 14 | 14 | LINE |
| 8 | Internal lines (draw/ink/sew) | — | — | 2 | 5 | POLYLINE |
| 11 | Internal cutouts | — | — | 1 | 1 | POLYLINE |
| 14 | Sew lines | — | — | 14 | 14 | POLYLINE |
| 15 | Annotation text | — | — | 14 | 70 | TEXT |
| 84 | Boundary validation (ASTM) | — | — | 17 | 17 | POLYLINE |
| 85 | Internal line validation (ASTM) | — | — | 2 | 5 | POLYLINE |
| 86 | Cutout validation (ASTM) | — | — | 1 | 1 | POLYLINE |
| 87 | Sew line validation (ASTM) | — | — | 14 | 14 | POLYLINE |


## Header variables

| | | | | | |
|---|---|---|---|---|---|
| $ACADVER | AC1012 | $DWGCODEPAGE | ANSI_1252 | $HANDSEED | AA6 |


These layer renderings present all data from each layer. In a graded file, non-sample-size pieces will not have data in all layers.

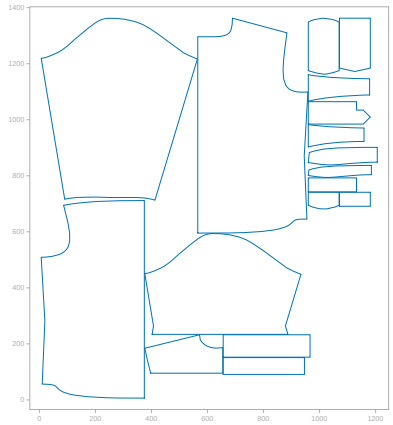


Layer 1 - Boundary / cut line

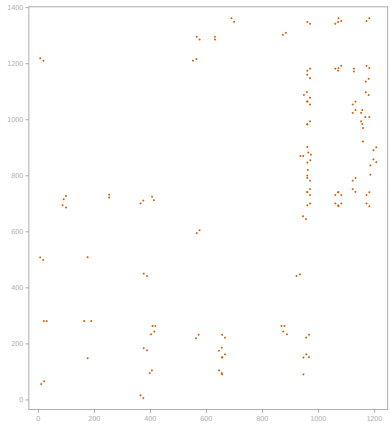


Layer 2 - Turn points

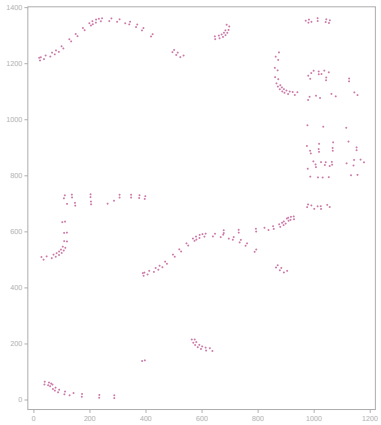


Layer 3 - Curve points

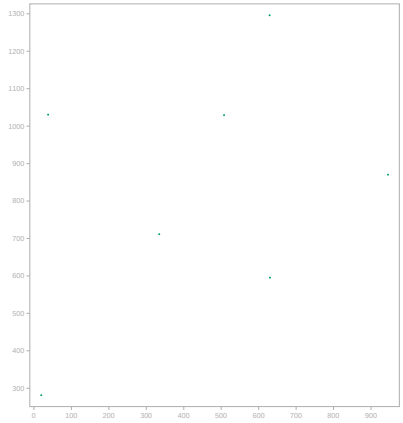

Layer 4 - Notches

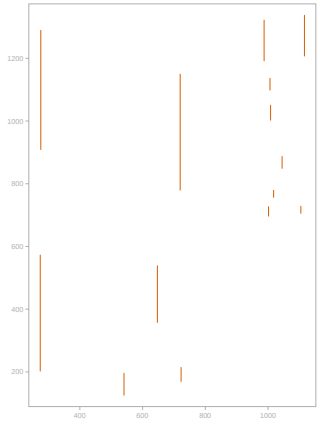

Layer 7 - Grain line




Layer 8 - Internal lines (draw/ink/sew)




Layer 11 - Internal cutouts




Layer 14 - Sew lines

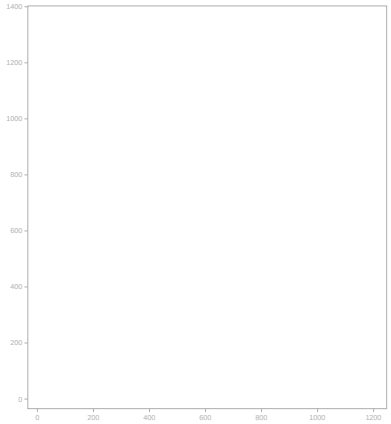

Layer 15 - Annotation text

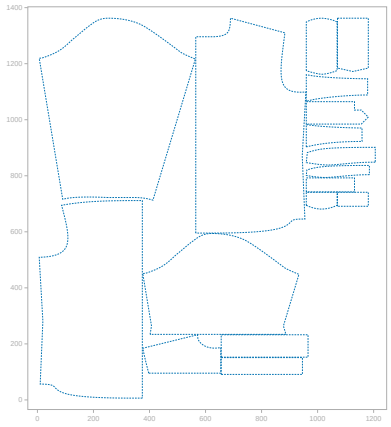

Layer 84 - Boundary validation (ASTM)

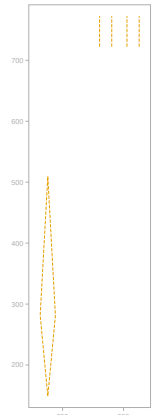

Layer 85 - Internal line validation (ASTM)



Layer 86 - Cutout validation (ASTM)



Layer 87 - Sew line validation (ASTM)

# ASTM D6673 Compliance

## 1 departure, 0 extensions, 5 advisories

| | |
|---|---|
| Rules evaluated | 60 |
| Not applicable | 48 |
| Advisories | 5 |


### Findings

departure

### Declared points miscategorized

Block FrontPanel_M: 1 of 73 declared points is miscategorized (§4.3(2)/(3)) — 1 curve point shown as a turn point on layer 2.

ASTM D6673 §4.3 (revised from AAMA-292 §4.2.2 / 4.2.3)

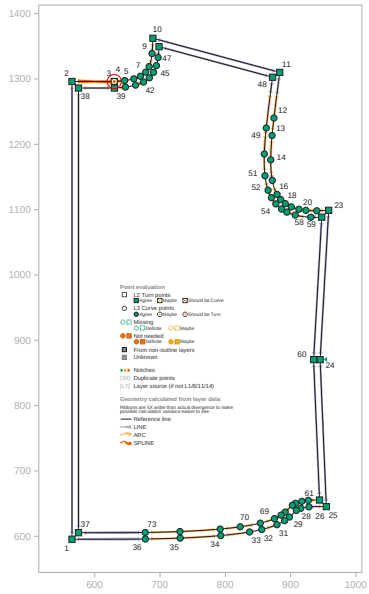

Evidence — FrontPanel_M

advisory

### L84 densification profile (advisory)

Validation layers 84 and 87 add intermediate points on 24 of 31 boundary polylines. 4 pieces carry no added points anywhere — either they contain no curves, or their intended shapes may need attention: sparse point sequences fittable as either arcs or facets cannot be distinguished from the data, and declared point types are taken as given — PlacketTop_M and 3 other pieces.

*Advisory — no conformance weight.*

ASTM D6673 §4.3.3.1

Also implicated (no image available):
Cuff_M
CuffInterface_M
PlacketUnder_M

advisory

### Validation polylines all span a curve segment

Every quality-validation polyline spans at least one curve segment.

ASTM D6673 §4.3.3.1

advisory

## Validation curves can honor the declared Curve Tolerance

Every smooth validation-curve chord's implied mid-chord sagitta is within 2x Curve Tolerance (1088 chords measured; worst 0.0524").

ASTM D6673 §4.3.1.1 / 4.3.3.1

advisory

## Notch depths are in the file's declared units

The 7 notches on layer 4 have depths that are plausible in millimeters.


ASTM D6673 §4.3.4 (since AAMA-292 §4.2.4)

advisory


## Possible point miscategorization

Block FullSleeve_M: 2 declared points may be miscategorized. 1 other piece may also have miscategorized points.

ASTM D6673 §4.3 (revised from AAMA-292 §4.2.2 / 4.2.3)

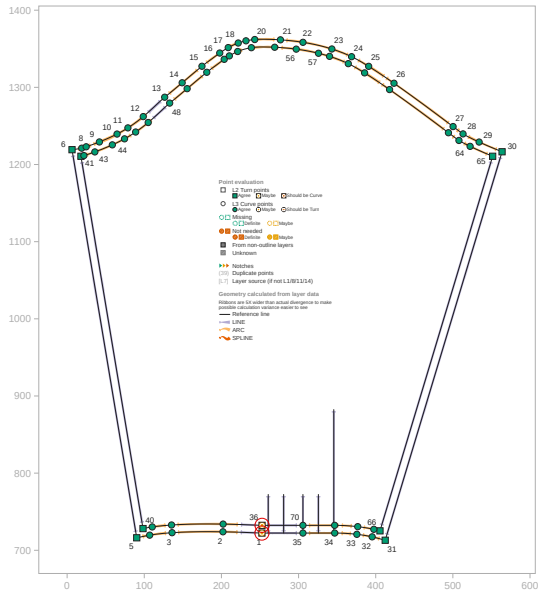

Evidence — FullSleeve_M

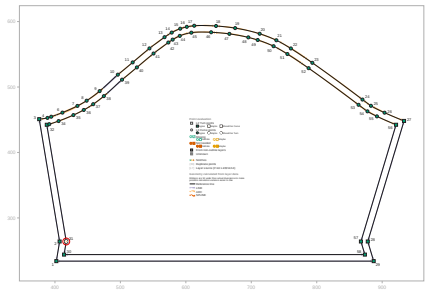

ShortSleeve_M


1 point may be miscategorized

## Pattern Pieces


| Piece | Category | Annotation | Material | Quantity | Sizes | Bounding box | Area |
|---|---|---|---|---|---|---|---|
| FrontPanel | | | Fabric | 1,0 | 102 | 393.12 × 766.88 | 259476.8 |
| PlacketTop | | | Fabric | 1,0 | 102 | 221.21 × 80.0 | 15597.6 |
| Cuff | | | Fabric | 1,0 | 102 | 310.0 × 80.0 | 24800.0 |
| FullSleeve | | | Fabric | 1,0 | 102 | 557.42 × 649.32 | 264110.6 |
| PlacketUnder | | | Fabric | 1,0 | 102 | 172.07 × 50.0 | 8603.5 |
| CollarTopInterface | | | Fabric | 1,0 | 102 | 198.92 × 80.0 | 11568.3 |
| Yoke | | | Fabric | 1,0 | 102 | 278.49 × 137.09 | 29207.4 |
| CollarBase | | | Fabric | 1,0 | 102 | 246.17 × 63.01 | 13215.7 |
| PocketRound | | | Fabric | 1,0 | 102 | 110.0 × 200.04 | 20856.4 |
| PocketFlap | | | Fabric | 1,0 | 102 | 110.0 × 50.0 | 5500.0 |
| CollarTop | | | Fabric | 1,0 | 102 | 218.92 × 94.95 | 15295.1 |
| PocketFlapRound | | | Fabric | 1,0 | 102 | 110.0 × 60.01 | 6046.5 |
| ShortSleeve | | | Fabric | 1,0 | 102 | 557.43 × 360.0 | 154729.9 |
| Pocket | | | Fabric | 1,0 | 102 | 110.0 × 190.24 | 20254.3 |
| BackPanel | | | Fabric | 1,0 | 102 | 368.06 × 705.0 | 232235.9 |
| CollarBaseInterface | | | Fabric | 1,0 | 102 | 225.24 × 43.0 | 7803.1 |
| CuffInterface | | | Fabric | 1,0 | 102 | 290.0 × 60.01 | 17402.9 |

### Piece outlines


These images are composites of all available layer data for each pattern piece. The file owner can see a flipbook with separate per-piece images of each layer at https://aw.fyi/dxf.

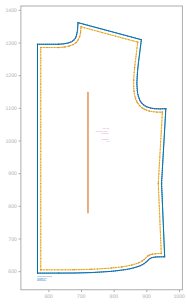


FrontPanel · 102



PlacketTop · 102




Cuff · 102




FullSleeve · 102




PlacketUnder · 102




CollarTopInterface · 102




Yoke · 102




CollarBase · 102




PocketRound · 102




PocketFlap · 102




CollarTop · 102




PocketFlapRound · 102




ShortSleeve · 102




Pocket · 102



BackPanel · 102



CollarBaseInterface · 102



CuffInterface · 102

## About this report

The electronic version of this file is stored securely for up to 30 days and used only to improve this service and understand failures. We do not share this file with anyone other than the requestor. The application that created this document does not expose source .dxf files to any LLM or other AI agent; all processing is purely computational, using a private, proprietary codebase.

This document is provided by ApparelWerks LLC, for instructional and research purposes. While it contains section references to published versions of withdrawn standards ANSI/AAMA-292 and ASTM D6673, it does not reproduce the text of the standards. We've written all the observations about the standards and their contents, and paraphrased where necessary. This service is not affiliated with, sponsored by, or endorsed by ANSI or ASTM International. And finally, you shouldn't make any decisions based on the information you read here, without actually consulting the standards yourself.

Want to know more? Have suggestions to improve this? Email rick@apparelwerks.com.

Want to try this service on your own .dxf files? Go to https://aw.fyi/dxf