

1

2

3

4

5

6

7

8

9

10

A

B

C

D

E






F

G

H

J

K

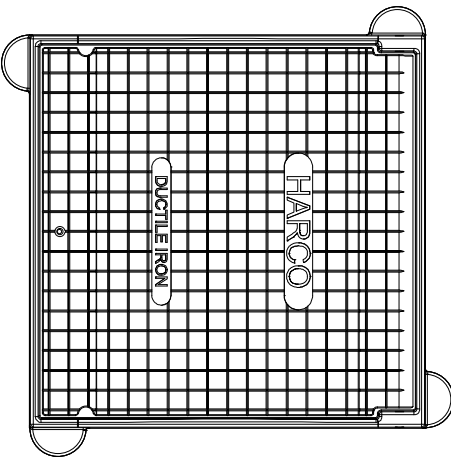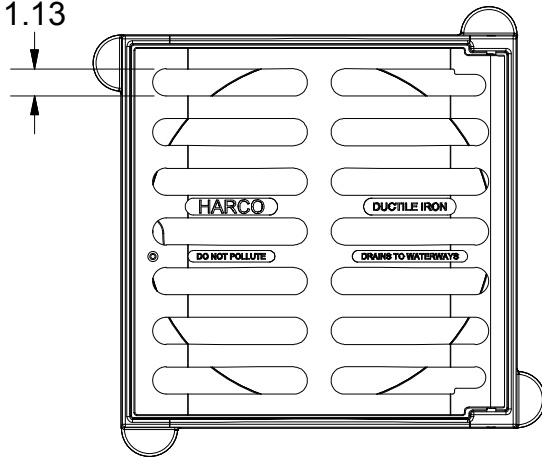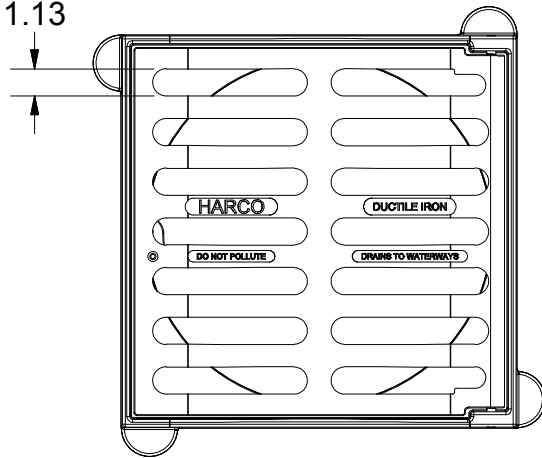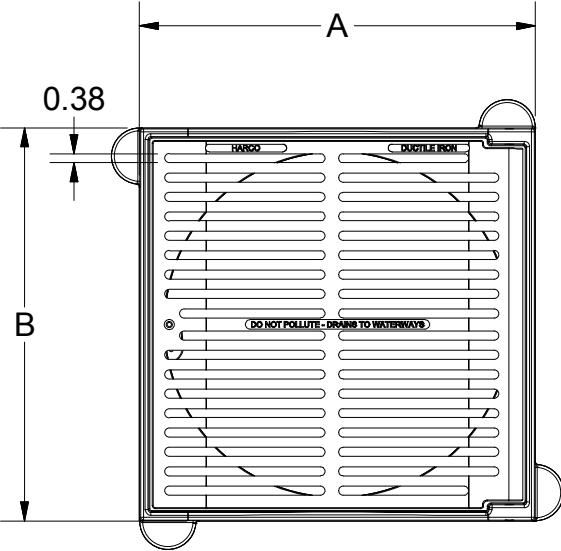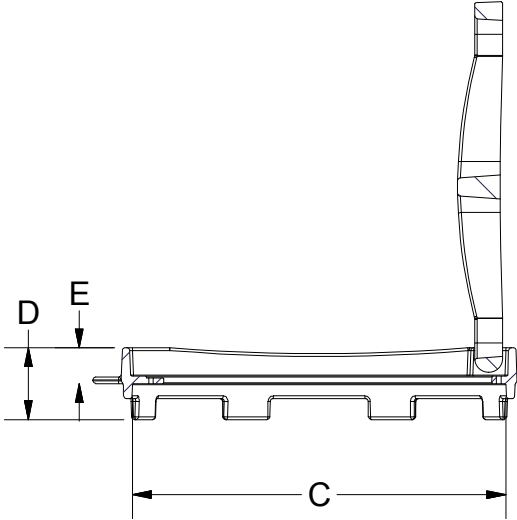

Pedestrian

Standard

Solid

Standard and Solid have H-25 traffic load rating
Pedestrian has H-10 traffic load rating
Quality: Materials shall conform to ASTM A536 Grade 80-55-06
Paint: Castings are furnished with black paint
Locking device: 1/4"-20 x 1-3/8" SHCS

Size	A [in]	B [in]	C [in]	D [in]	E [in]	Approx Open Area [in^2]
12	13.77	13.57	12.75	2.83	1.34	53.04 (Ped) , 68.05 (Stand)
15	16.50	16.38	15.55	2.99	1.50	87.27 (Ped) , 98.61 (Stand)

NOTICE This document contains confidential or proprietary information of The Harrington Corporation. Neither the document nor the information therein is to be reproduced, distributed, or disclosed, either in whole or in part, except as specifically authorized, in writing, by The Harrington Corporation. Copyright 2014 The Harrington Corporation/Harco Fittings	NOTES EXCEPT AS SPECIFIED 1. All Dimensions in inches. 2. Do Not Scale Drawing. 3. Deburr All Edges. 4. All Dimensions are for a Finished Product. 5. 1/8" Fillets & Rounds Unless Otherwise Noted. 7. Tolerances: .XX = 0.01 .XXX = 0.005 .XXXX = 0.0005 Fractions = ± 1/32" Angles = ± 1/2°	DRAWN BY: DAC DWG DATE: 8/20/2014 MATERIAL: Ductile Iron	DETAILED BY: DAC REVIEWED BY:	SCALE: n/a SHEET: 1 of 1	Rev:	Effective Date: DRAWING NUMBER: Square Hinge Cut Sheet.idw	 THE HARRINGTON CORPORATION TITLE: Square Hinged Grates and Frames
--	---	--	---	---	-------------	--	---