

WAAS CH 77530 W18B	APP CRS 175°	Rwy Idg 12250 TDZE 542 Apt Elev 542
--	------------------------	--

RNAV (GPS) Y RWY 18R
AUSTIN-BERGSTROM INTL (AUS)

RNP APCH-GPS.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500; increase LNAV Cat E visibility to RVR 5500.

MAIS

 $\textcircled{A_4} \quad \text{䷆}$

MISSED APPROACH: Climb to 1000 then climbing right turn to 3500 direct GARDS and hold.

D-ATIS

124.4

AUSTIN APP CON

127.225	317.65	(EAST)
120.875	270.25	(SOUTH)
119.0	370.85	(WEST)

AUSTIN TOWER

121.0 281.5




GND CON

121 9 348 6

CLINC DEL

25.5 263.0

CPDLC

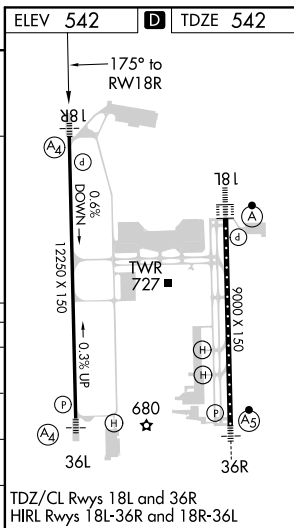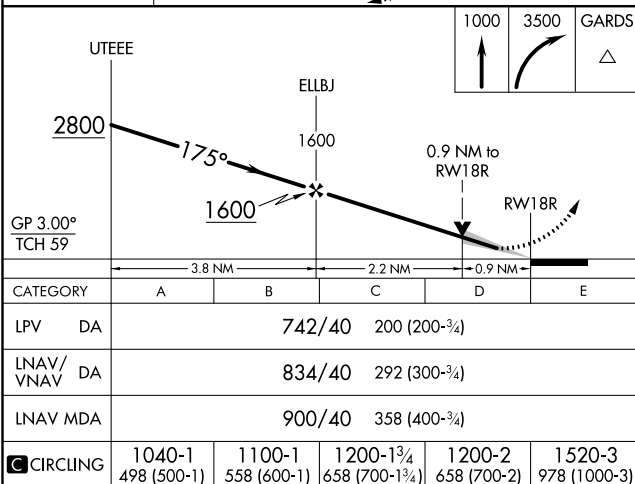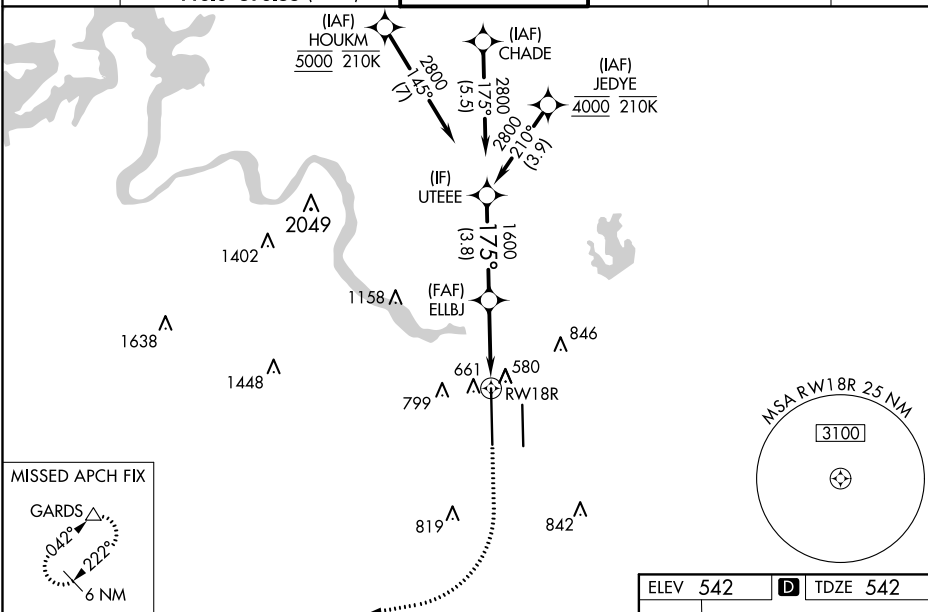

AUSTIN, TEXAS

Amdt 3 22APR21

AUSTIN-BERGSTROM INTL (AUS)

30°12'N-97°40'W

RNAV (GPS) Y RWY 18R

SC-3, 27 JAN 2022 to 24 FEB 2022