

LOM	PI	APP CRS	Rwy Idg	10104
356		309°	TDZE	650
			Apt Elev	661

NDB RWY 31


GENERAL DOWNING-PEORIA INTL (PIA)

▼ For inop ALS, increase S-31 Cat A/B visibility to RVR 5500, and Cat C/D to 1½ SM. When local altimeter setting not received, use Logan County altimeter setting and increase all MDA 100 feet, increase S-31 Cat C and D visibility ¼ mile, and Circling Cat C ¼ mile and Cat D ½ mile. Circling Rwy 13, 31 NA at night.


MALSR

MISSED APPROACH: Climbing left turn 2400 direct PIA VORTAC and hold.

ATIS 126.1 282.2	PEORIA APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6
---------------------	-------------------------------	------------------------------	-------------------------

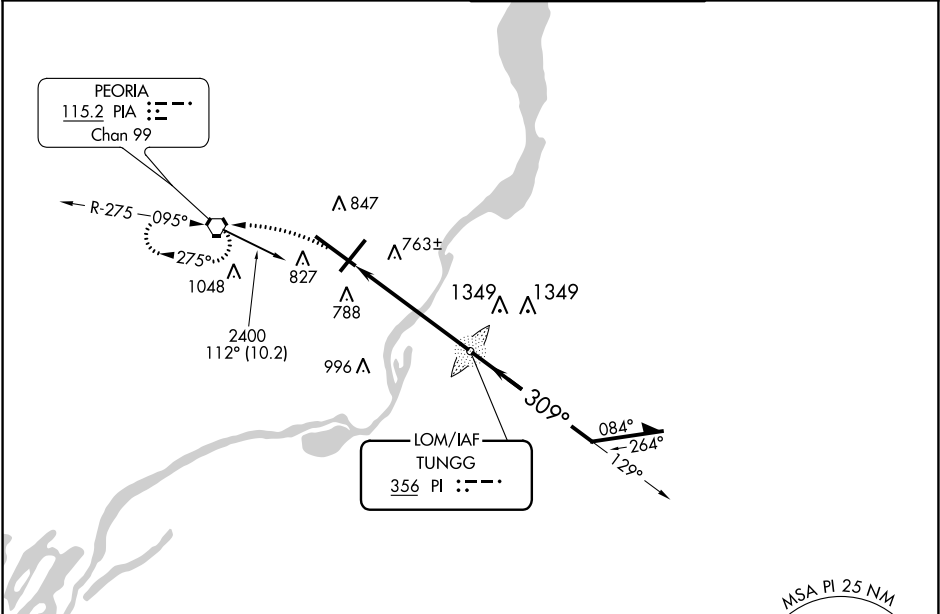

ELEV	661	TDZE	650
------	-----	------	-----

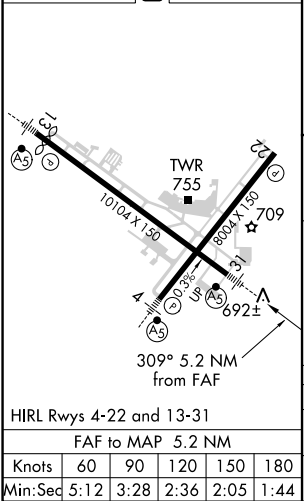

2400 PIA		PI LOM		Remain within 10 NM	
2400		2400		2400	
309° 5.2 NM from FAF		309°		129°	
CATEGORY		A	B	C	D
S-31		1140/40	490 (500-¾)	1140/50	490 (500-1)
CIRCLING		1160-1	499 (500-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)