



WAAS CH 62802 W32A	APP CRS 320°	Rwy Idg TDZE Apt Elev	7278 793 796
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 32

INDIANAPOLIS INTL (IND)

<div><div>⚠</div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **RVR 1800 authorized with use of FD or AP or HUD to DA.</div></div>	<div><div>MALSR</div><div></div></div>	<div>MISSED APPROACH: Climb to 3000 direct KEADY and hold.</div>
---	--	--

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 257.8	GND CON 121.9	CLNC DEL 128.75 257.8	CPDLC
-------------------------	--	----------------------------------	-------------------------	---------------------------------	-------

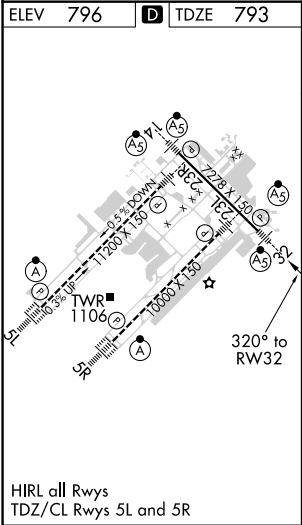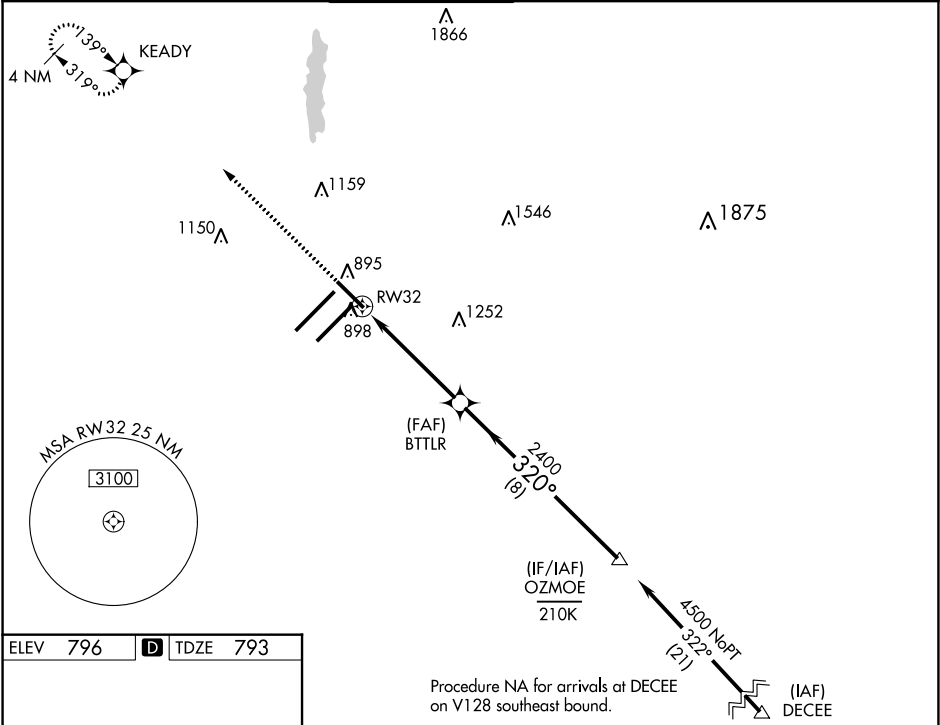

3000 ↑ KEADY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		OZMOE		
		BTTLR 2400		4500		
*LNAV only		*1 NM to RW32		GP 3.00° TCH 53		
CATEGORY		A		B	C	D
LPV DA				** 993/24 200 (200-½)		
LNAV/ VNAV DA				1069/24 276 (300-½)		
LNAV MDA		1160/24 367 (400-½)		1160/35 367 (400-¾)		
CIRCLING		1420-1 624 (700-1)		1420-1¾ 624 (700-1¾)		1560-2½ 764 (800-2½)

EC-2, 27 JAN 2022 to 24 FEB 2022

EC-2, 27 JAN 2022 to 24 FEB 2022