


LOC I-SUS	APP CRS	Rwy Idg	7414
110.55	079°	TDZE	462
		Apt Elev	463

ILS or LOC RWY 8R  
SPIRIT OF ST LOUIS (SUS)


**⚠** When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all DA to 719 feet, all MDA 60 feet, increase S-LOC 8R Cats C/D to RVR 5000 and Circling Cat C visibility ¼ mile. For inop MALS, increase S-LOC 8R Cats C/D visibility to RVR 6000. For inop MALS when using St Louis Lambert Intl altimeter setting, increase S-LOC 8R Cats C/D visibility to 1½ mile.  
\* RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).

**MALS**



**MISSED APPROACH:** Climb to 1500 then climbing left turn to 2400 direct FTZ VORTAC and hold.

ATIS <b>134.8</b>	ST. LOUIS APP CON <b>126.5 254.3</b>	SPIRIT TOWER* <b>124.75 (CTAF) 0 257.2</b>	GND CON <b>121.7</b>	CLNC DEL <b>133.1</b>	ST. LOUIS CLNC DEL <b>121.7</b> (when tower closed)	UNICOM <b>122.95</b>
----------------------	---	---	-------------------------	--------------------------	---	-------------------------

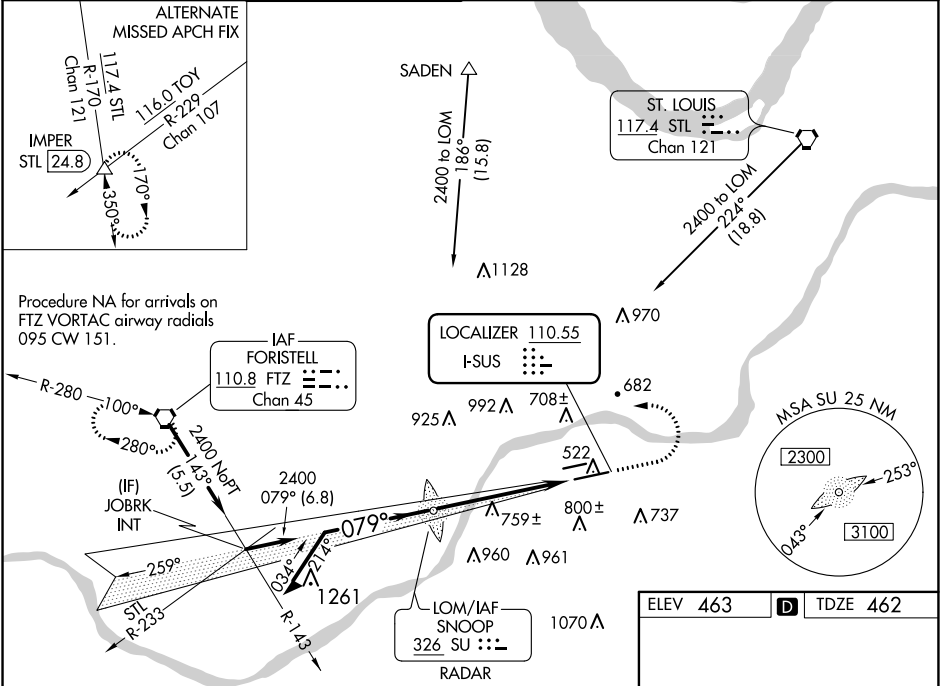

Remain within 10 NM			
SU LOM RADAR			
259°			
2400			
079°			
2185			
2400			
GS 3.00°			
TCH 55			
5.2 NM			
CATEGORY	A	B	C
S-ILS 8R *	662/24 200 (200-½)		
S-LOC 8R	880/24 418 (500-½)	880/40 418 (500-¾)	
CIRCLING	1100-1 637 (700-1)	1120-1¾ 657 (700-1¾)	1140-2¼ 677 (700-2¼)
MIRL Rwy 8L-26R			
HIRL Rwy 8R-26L			
FAF to MAP 5.2 NM			
Knots	60	90	120 150 180
Min:Sec	5:12	3:28	2:36 2:05 1:44

NC-3, 27 JAN 2022 to 24 FEB 2022

NC-3, 27 JAN 2022 to 24 FEB 2022