

WAAS
CH 86215
W07B

APP CRS
074°

Rwy Idg 10600
TDZE 128
Apt Elev 151

RNAV (GPS) RWY 7L


TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RNP APCH.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1½ SM.

MALS R

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct JUKEP and hold.

D-ATIS 135.5	ANCHORAGE APP CON 118.6 290.5	ANCHORAGE TOWER 118.3 257.8	GND CON 121.9 338.25	CLNC DEL 119.4 323.1
-----------------	----------------------------------	--------------------------------	-------------------------	-------------------------

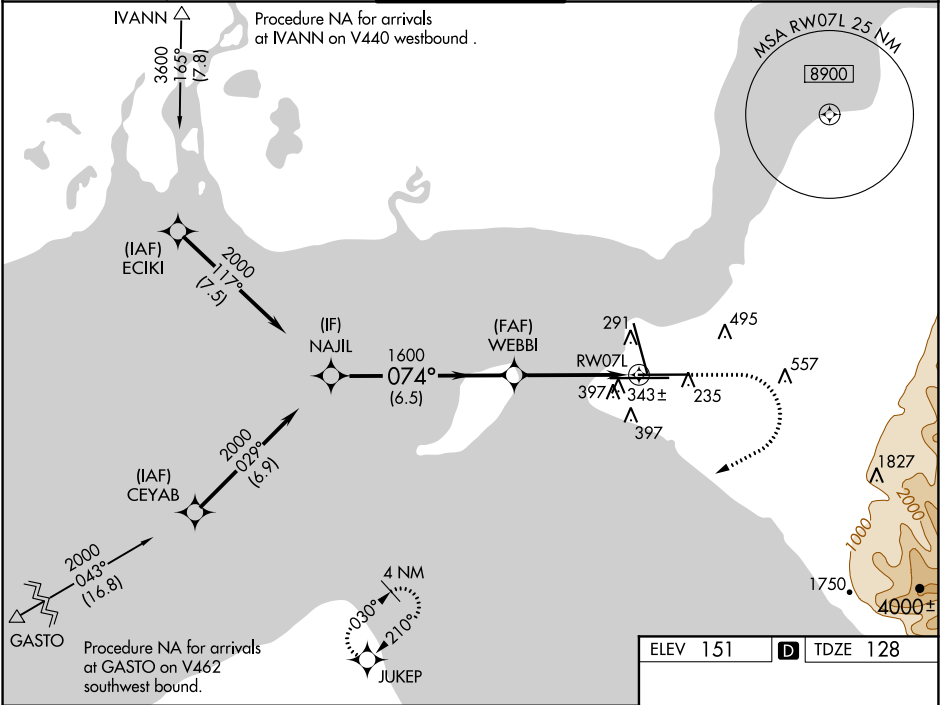

NAJIL VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 63).				
800 3000 JUKEP				
GP 3.00° TCH 54				
2000 074° 1600 1600				
6.5 NM 3.2 NM 1.3 NM				
CATEGORY	A	B	C	D
LPV DA	328/18		200 (200-½)	
LNAV/VNAV DA	595/50		467 (500-1)	
LNAV MDA	600/24 472 (500-½)		600/50 472 (500-1)	
CIRCLING	700-1 549 (600-1)		800-1¾ 649 (700-1¾)	920-2½ 769 (800-2½)

