WAAS CH 70305 W20A	APP CRS 202°	Rwy ldg 7400 TDZE 673 Apt Elev 683

RNAV (GPS) RWY 20

LOVELL FLD (CHA)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Circling Rwy 15, 33 NA at night. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cat A/B. For inop ALS, increase LNAV Cat C/D visibility to 1⅞ SM.

ALSF-2

MISSED APPROACH: Climb to 3800 direct FIDGO and hold.

ATIS	CHATTANOOGA APP CON ★	CHATTANOOGA TOWER ★	GND CON	CLNC DEL	UNICOM
119.85	125.1 379.1	118.3 (CTAF) L 257.8	121.7 348.6	120.95 348.6	122.95

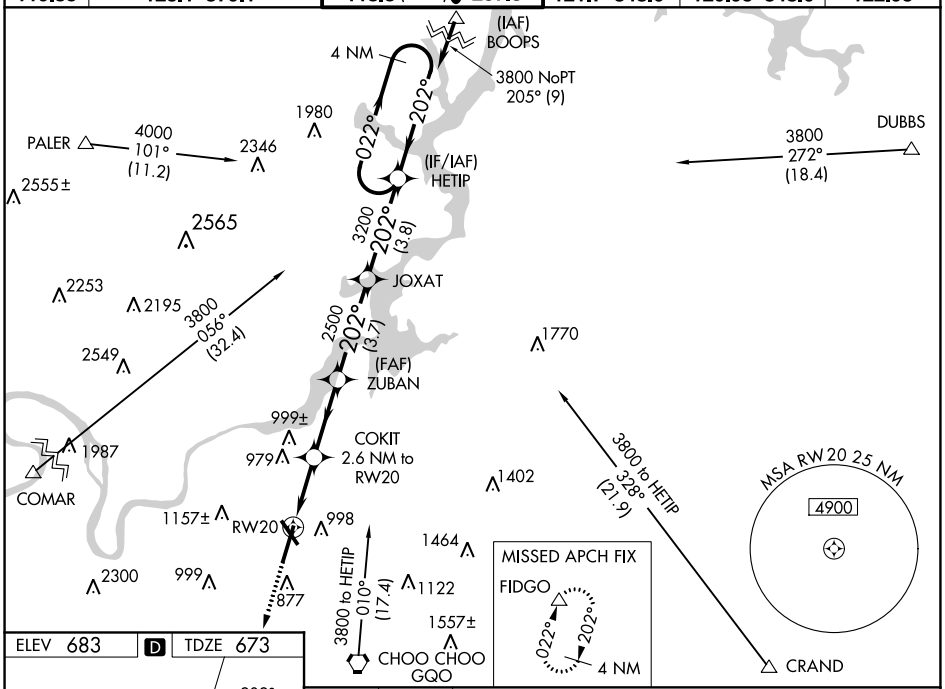

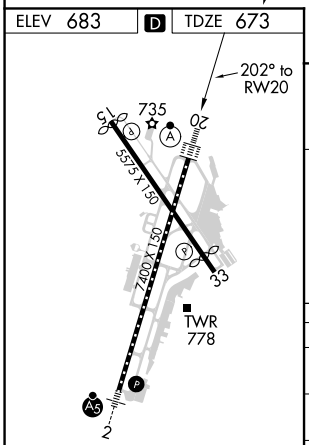

MIRL Rwy 15-33
HIRL Rwy 2-20 L
TDZ/CL Rwy 20 L

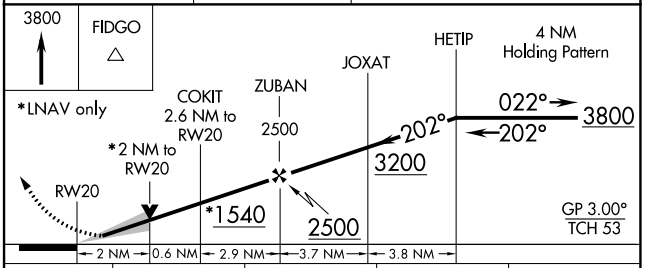

CATEGORY	A	B	C	D
LPV DA	873/18 200 (200-½)			
LNAV/VNAV DA	1281-1¾ 608 (600-1¾)			
LNAV MDA	1340-1 667 (700-1)		1340-1½ 667 (700-1½)	
C CIRCLING	1340-1 657 (700-1)		1480-2¼ 797 (800-2¼)	1580-3 897 (900-3)

SE-1, 27 JAN 2022 to 24 FEB 2022
SE-1, 27 JAN 2022 to 24 FEB 2022