
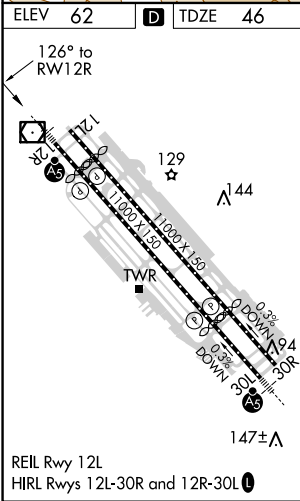


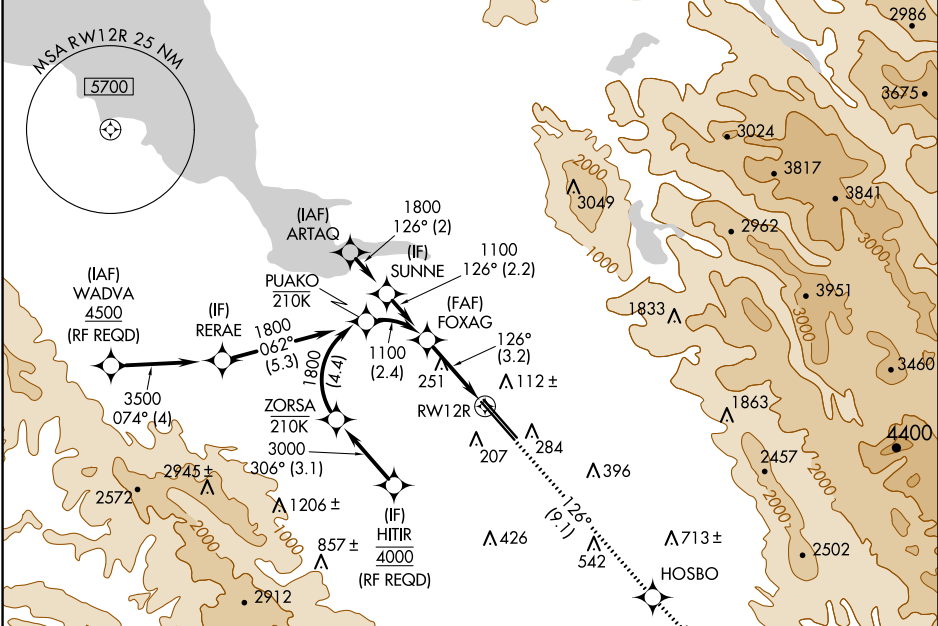

APP CRS	Rwy ldg	8587
126°	TDZE	46
	Apt Elev	62

RNAV (RNP) Z RWY 12R
NORMAN Y MINETA SAN JOSE INTL (SJC)

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 54°C (130°F). GPS required.			MALSR	MISSED APPROACH: Climb to 4600 on track 126° to HOSBO and on track 124° to GILRO and hold.		
D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) 257.6	121.7	118.0		122.95

RADAR REQUIRED



				
<p>FOXAG</p> <p>1100</p> <p>GP 3.00° TCH 58</p>		<p>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).</p> <p>4600 ↑ tr 126°</p>	<p>HOSBO</p> <p>tr 124°</p>	<p>GILRO</p> <p>△</p>
<p>See planview for multiple IF locations.</p> <p>3.2 NM</p>		<p>RWY12R</p>		
CATEGORY	A	B	C	D
RNP 0.15 DA		380-5/8	334 (400-5/8)	
RNP 0.30 DA		486-1	440 (500-1)	
AUTHORIZATION REQUIRED				

SW-2, 27 JAN 2022 to 24 FEB 2022

SW-2, 27 JAN 2022 to 24 FEB 2022