

R.SENABADHY SESAN

RA2211003050047

B.TECH CSE - C

III - YEAR

Observation

Objective: Create and configure a suitable topology for both LAN and WAN using 10-15 computers, routers, and switches. Simulate the transmission of a message from one network to a computer in another network.

Procedure:

1. Topology Design:

- The network topology was successfully created in Cisco Packet Tracer, including both LAN and WAN configurations.
- The LAN was configured with 10-15 computers connected to at least two switches.
- The WAN setup was achieved by connecting the LAN networks via two routers.

2. Network Setup:

- Devices were added and connected as per the topology design.
- IP addresses were correctly assigned to all computers within the LAN, ensuring proper communication.
- Router interfaces were configured with appropriate IP addresses to enable WAN communication between networks.

3. LAN Configuration:

- All computers were connected to switches, and each computer was assigned a unique IP address within the specified subnet.
- Switches were connected to each other to ensure full LAN connectivity.

4. WAN Configuration:

- Routers were successfully connected to each other, and interfaces were configured with correct IP addresses.
- Static routes were set up on the routers, enabling successful communication between the LANs over the WAN.


5. Simulation:

- A message was sent from one computer in one LAN to a computer in another LAN using the simulation mode in Cisco Packet Tracer.
- The message was transmitted successfully across the network, traveling through switches, routers, and the WAN.
- The path of the message was observed, and the transmission was verified to be correct with no errors.

6. Network Performance:

- The network operated as expected, with no packet loss or transmission errors observed.
- The successful message transmission confirmed that the network was properly configured for both LAN and WAN communication.

OUTPUT:

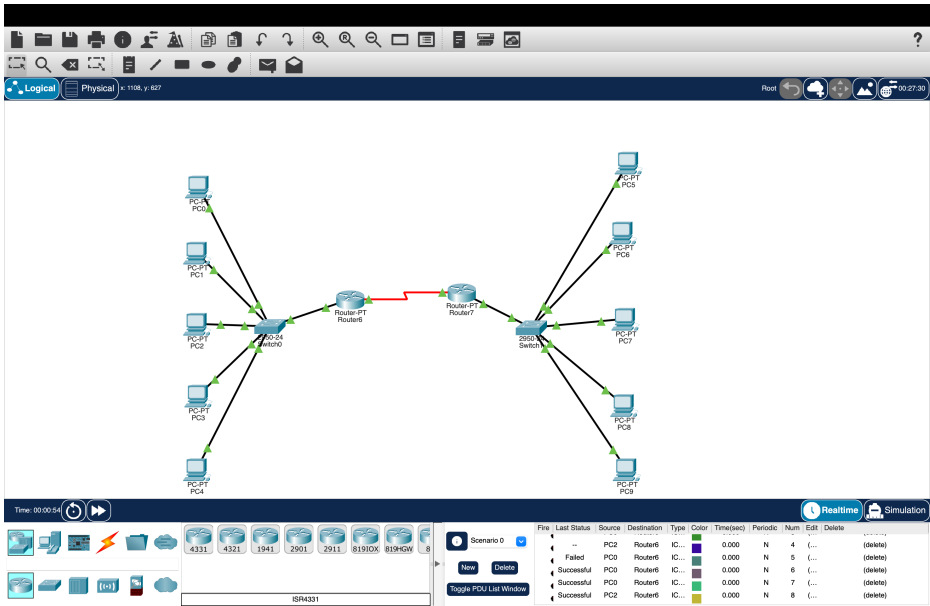

<div>RealtimeSimulation</div>											
Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete	
	Successful	PC4	Router6	IC...		0.000	N	0	(...)	(delete)	
	Successful	PC2	Router6	IC...		0.000	N	1	(...)	(delete)	
	Successful	PC3	Router6	IC...		0.000	N	2	(...)	(delete)	