adb remount 失败

提示No partitions to remount,remount failed

```
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$ adb remount
Binder ioctl to enable oneway spam detection failed: Invalid argument
Skipping /system for remount
Skipping /system_ext for remount
Skipping /vendor for remount
Skipping /product for remount
No partitions to remount
remount failed
```
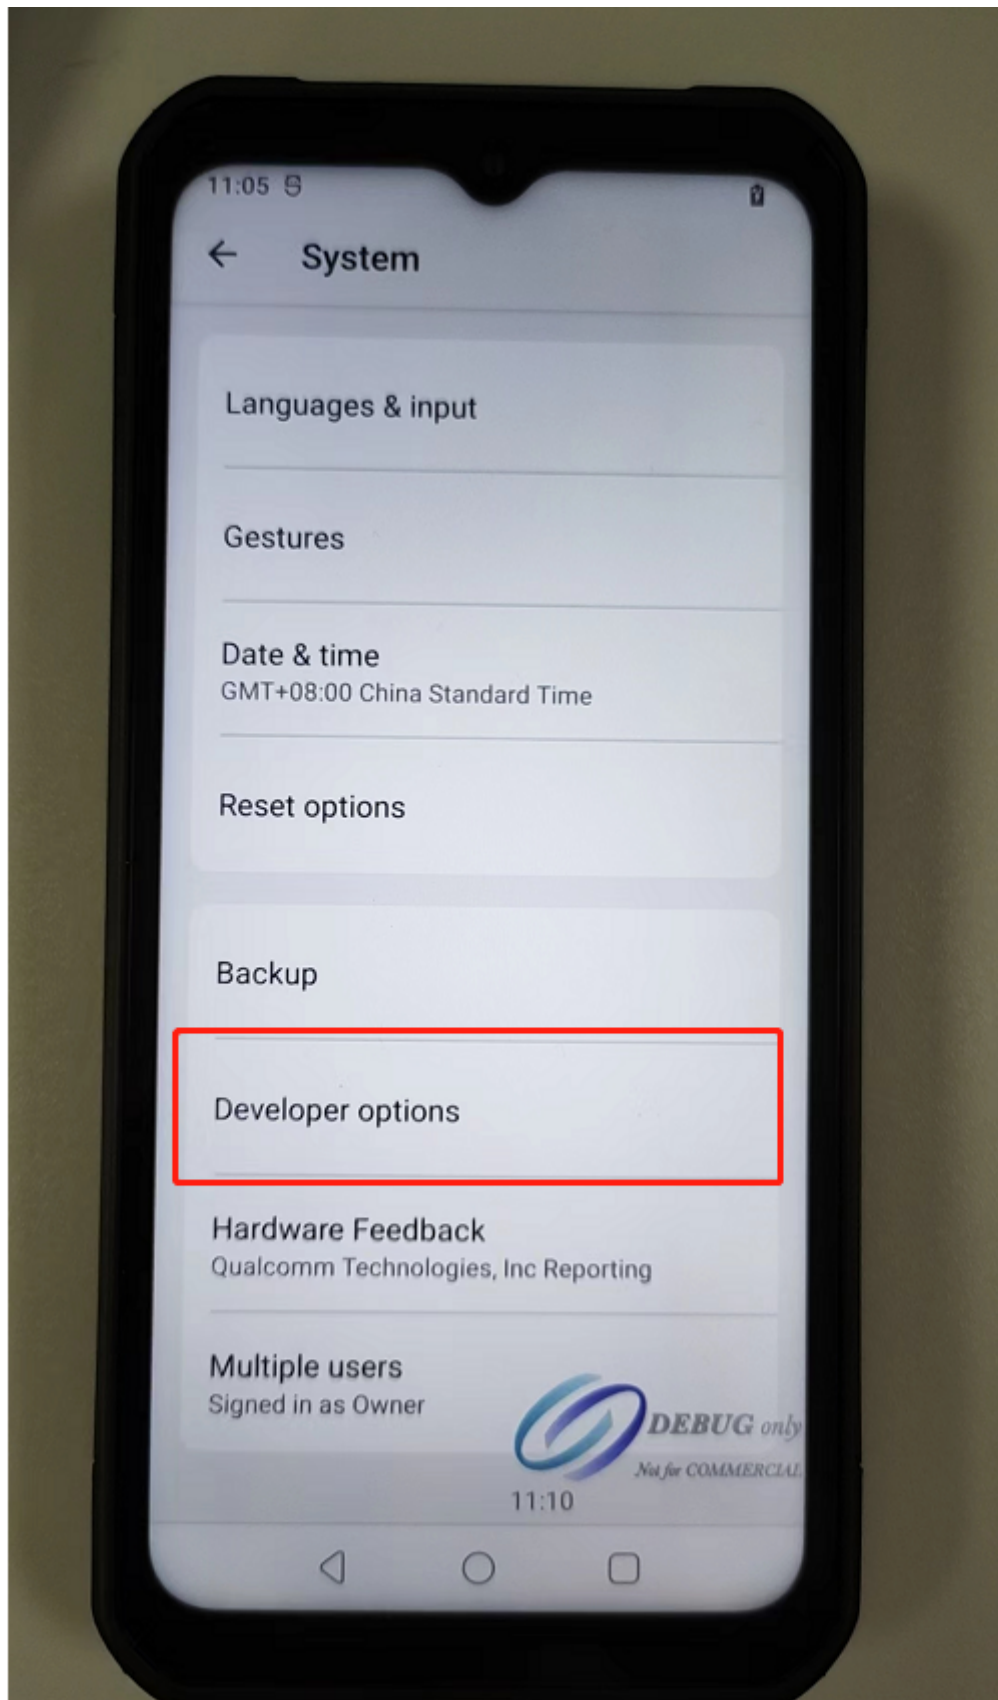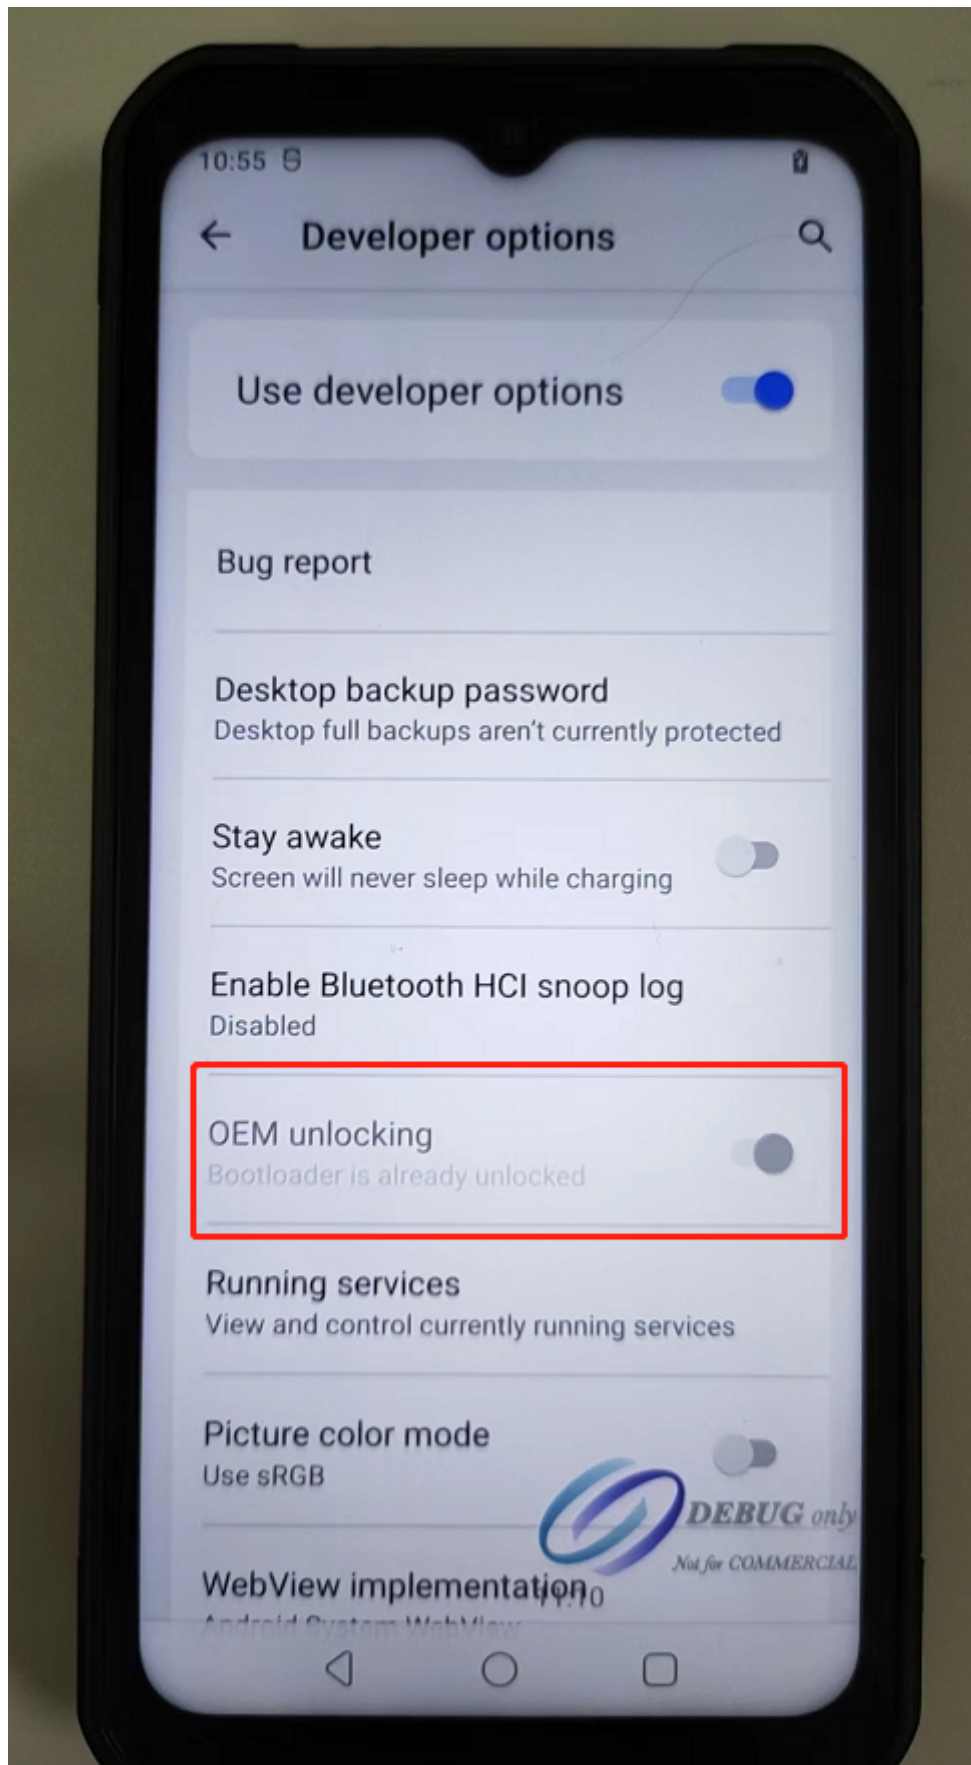
原因

机器打开熔丝(烧录了fuse)后,remount失败

解决

- 设置->关于手机,连续点击Build number 七下,提示You are Developer
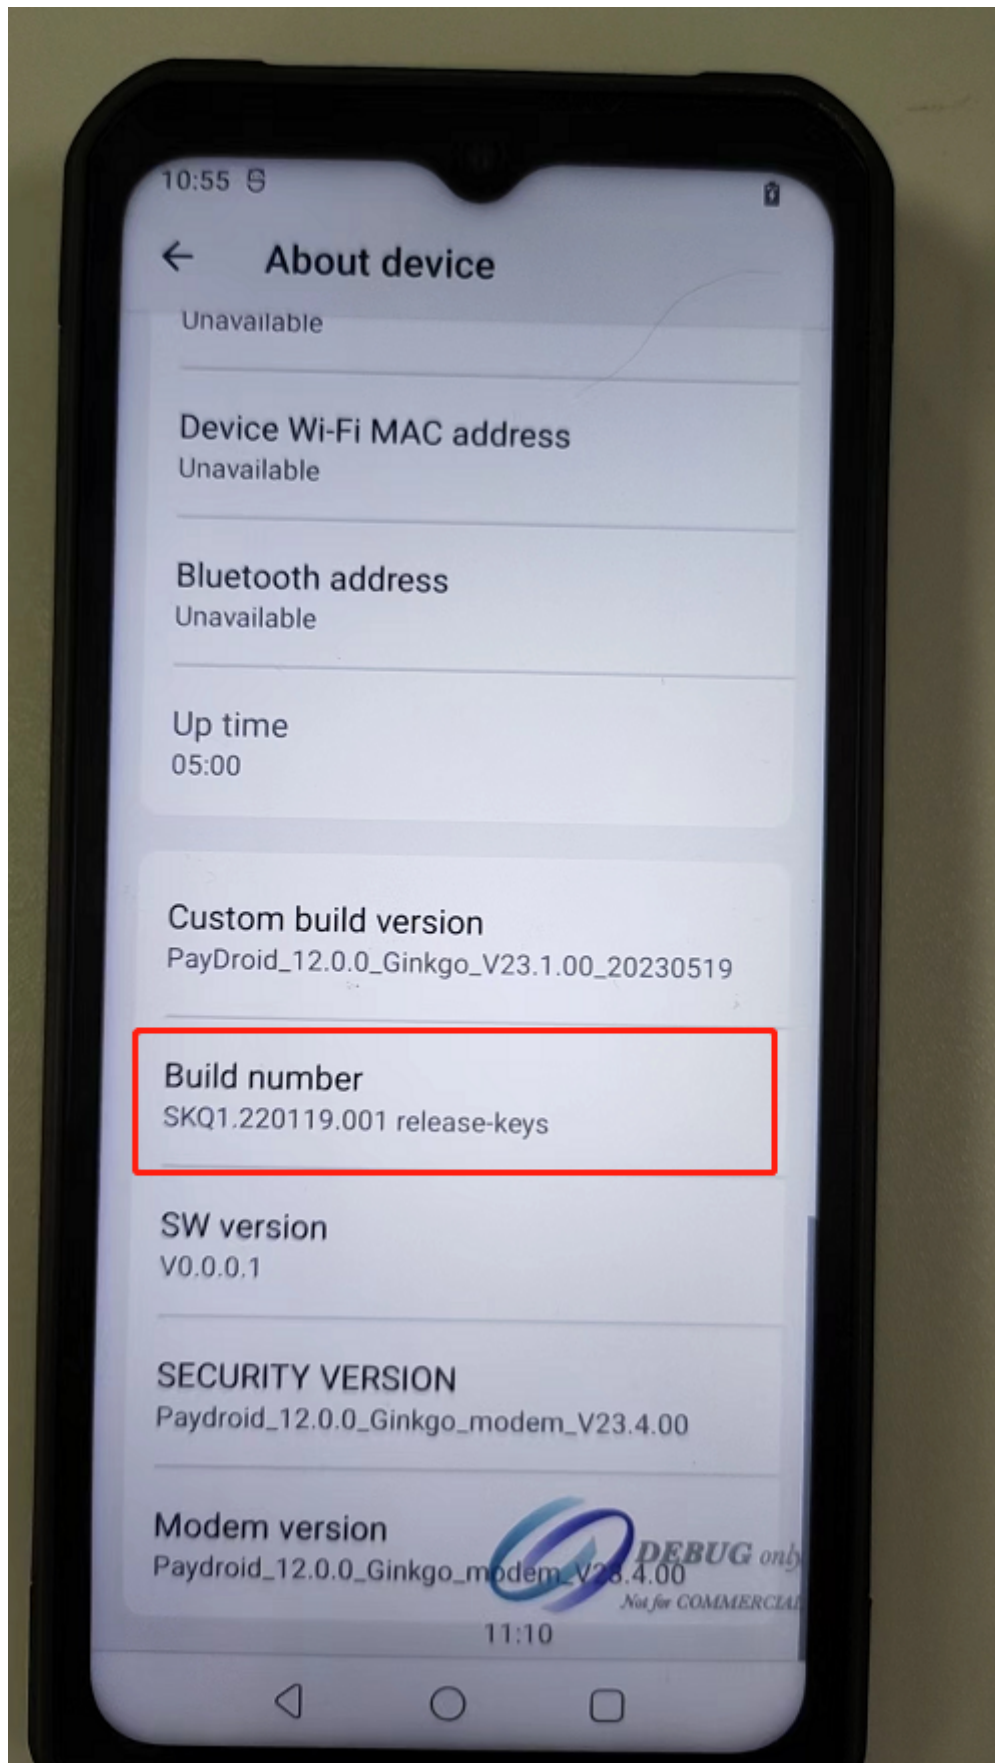
- 设置->System->Developer options

- 设置->System->Developer options,打开OEM unlocking 菜单

- adb reboot bootloader

- fastboot flashing unlock

- 按音量下键选择 UNLOCK THE BOOTLOADER,然后按power键确认,重启
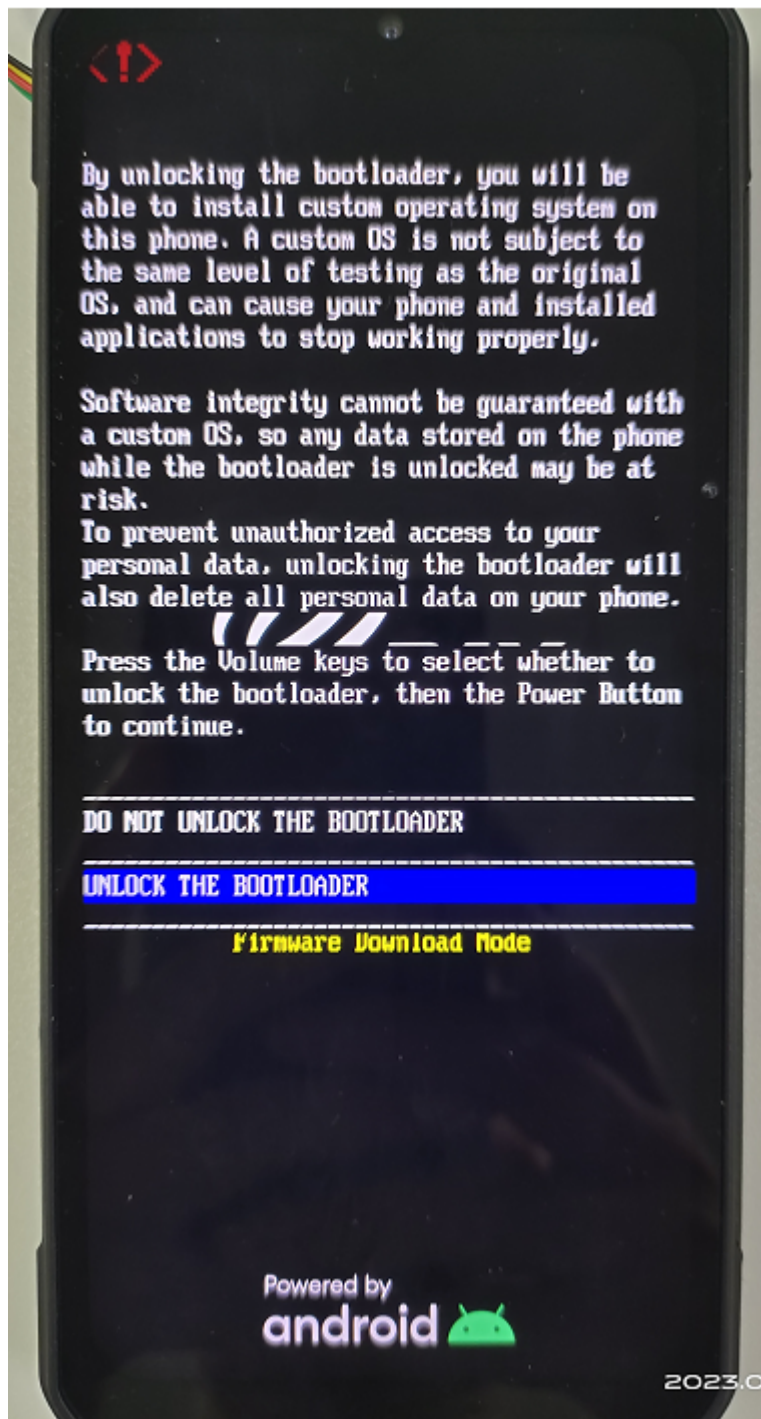
- 等待自动重启后,输入adb root

```
G:\Debug_work>adb devices  ←
List of devices attached
2750000443        device


G:\Debug_work>adb root  ←
adbd is already running as root


G:\Debug_work>
G:\Debug_work>adb remount
```

- 输入adb remount,提示需要reboot take effect,如下

```
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$ adb remount
Binder ioctl to enable oneway spam detection failed: Invalid argument
Disabling verity for /system
Waited one second for gsiservice (is service started? are binder threads started and available?)
Using overlayfs for /system
Disabling verity for /system_ext
Using overlayfs for /system_ext
Disabling verity for /vendor
Using overlayfs for /vendor
Disabling verity for /product
Using overlayfs for /product
Now reboot your device for settings to take effect
```

- adb reboot,重启后,再次输入 adb remount ,提示 成功,如下

```
remount failed
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$ adb reboot bootloader
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$ adb remount
Binder ioctl to enable oneway spam detection failed: Invalid argument
Disabling verity for /system
Waited one second for gsiservice (is service started? are binder threads started and available?)
Using overlayfs for /system
Disabling verity for /system_ext
Using overlayfs for /system_ext
Disabling verity for /vendor
Using overlayfs for /vendor
Disabling verity for /product
Using overlayfs for /product
Now reboot your device for settings to take effect
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$ adb reboot
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$ adb remount  ←
Binder ioctl to enable oneway spam detection failed: Invalid argument
remount succeeded  ←
xielianxiong@xielianxiong-pc:/mnt/g/Debug_work/A6650_debug/modem$
```