

**** Configure Password Authentication in Apache Tomcat ****

-- Steps to be follow --

1st Edit tomcat-user.xml

```
# vi /opt/tomcat/conf/tomcat-users.xml
```

``` Add this line in the bottom ```

[ you can change username and password ]

```
<role rolename="manager-gui"/>
<role rolename="admin-gui"/>

<user username="sumit" password="redhat" roles="manager-gui,admin-gui"/>
</tomcat-users>
```

2<sup>nd</sup> By default in newer Tomcat versions:

➔ /manager/html

➔ /host-manager/html

may allow access only from localhost.

**So, Comment This line...**

```
vi /opt/tomcat/webapps/manager/META-INF/context.xml
```

```
<!--
<Valve className="org.apache.catalina.valves.RemoteCIDRValve"
 allow="127.0.0.0/8,::1/128" />
-->
```

3<sup>rd</sup> comment this line also ...

```
vi /opt/tomcat/webapps/host-manager/META-INF/context.xml
```

```
<!--
 <Valve className="org.apache.catalina.valves.RemoteCIDRValve"
 allow="127.0.0.0/8,::1/128" />
-->
```

#### 4<sup>th</sup> Restart tomcat

```
systemctl restart tomcat.service
```

```
[root@tomcatsrv1 ~]#
[root@tomcatsrv1 ~]# systemctl restart tomcat.service
[root@tomcatsrv1 ~]# systemctl status tomcat.service
● tomcat.service - Apache Tomcat Web Application Container
 Loaded: loaded (/etc/systemd/system/tomcat.service; enabled; preset: disabled)
 Active: active (running) since Fri 2026-05-29 02:17:59 EDT; 16s ago
 Process: 6018 ExecStart=/opt/tomcat/bin/startup.sh (code=exited, status=0/SUCCESS)
 Main PID: 6026 (java)
 Tasks: 30 (limit: 10820)
 Memory: 220.1M
 CPU: 6.583s
 CGroup: /system.slice/tomcat.service
 └─6026 /usr/lib/jvm/java-11-openjdk-11.0.18.0.10-2.el9_1.x86_64/bin/java -Djava.util.lo

May 29 02:17:59 tomcatsrv1.radical.coom systemd[1]: Starting Apache Tomcat Web Application Container.
May 29 02:17:59 tomcatsrv1.radical.coom startup.sh[6018]: Tomcat started.
May 29 02:17:59 tomcatsrv1.radical.coom systemd[1]: Started Apache Tomcat Web Application Container.
```

#### 5<sup>th</sup> Quick verification

```
ss -antlpu | grep java
```


```
[root@tomcatsrv1 ~]# ss -antlpu | grep java
tcp LISTEN 0 100 *:* users:(("java",pid=6026,fd=43))
tcp LISTEN 0 1 [::ffff:127.0.0.1]:8005 *:* users:(("java",pid=6026,fd=54))
```

#### 6<sup>th</sup> Check ip addr


```
ip a s
```

```
[root@tomcatsrv1 ~]# ip a s
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
 link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
 inet 127.0.0.1/8 scope host lo
 valid_lft forever preferred_lft forever
 inet6 ::1/128 scope host
 valid_lft forever preferred_lft forever
2: ens160: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
 link/ether 00:0c:29:1a:d6:73 brd ff:ff:ff:ff:ff:ff
 altname enp3s0
 inet 192.168.77.135/24 brd 192.168.77.255 scope global dynamic noprefixroute ens160
 valid_lft 1545sec preferred_lft 1545sec
 inet6 fe80::20c:29ff:fela:d673/64 scope link noprefixroute
 valid_lft forever preferred_lft forever
```

7<sup>th</sup> Now, do testing locally → Open firefox and put your ip addr and port no → e.g., [ 192.168.0.100:8080 ]

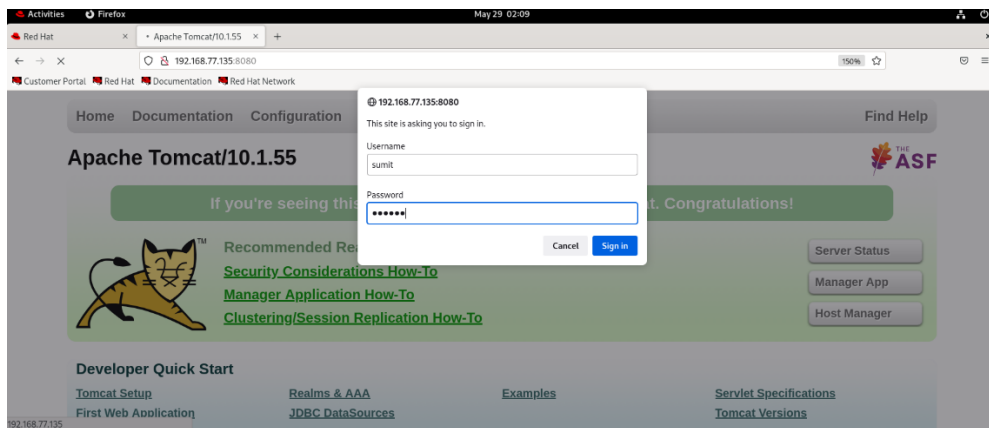

Now, hopefully you should get the access

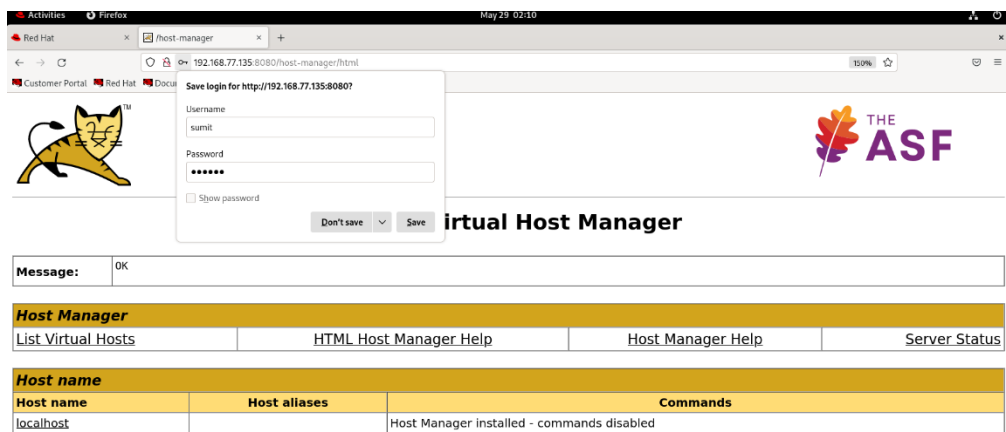

8<sup>th</sup> Now start firewalld and SeLinux

```
systemctl restart firewalld.service
```

```
setenforce 1
```

```
[root@tomcatsrv1 ~]# systemctl status firewalld.service
● firewalld.service - firewalld - dynamic firewall daemon
 Loaded: loaded (/usr/lib/systemd/system/firewalld.service; enabled; preset: enabled)
 Active: active (running) since Fri 2026-05-29 01:28:28 EDT; 1h 26min ago
 Docs: man:firewalld(1)
 Main PID: 824 (firewalld)
 Tasks: 2 (limit: 10820)
 Memory: 4.4M
 CPU: 1.082s
 CGroup: /system.slice/firewalld.service
 └─824 /usr/bin/python3 -s /usr/sbin/firewalld --nofork --nopid

May 29 01:28:27 tomcatsrv1.radical.com systemd[1]: Starting firewalld - dynamic firewall daemon...
May 29 01:28:28 tomcatsrv1.radical.com systemd[1]: Started firewalld - dynamic firewall daemon.
[root@tomcatsrv1 ~]# getenforce
Enforcing
```

## 9<sup>th</sup> Add firewall Rules

```
[root@tomcatsrv1 ~]# firewall-cmd --permanent --add-port=8080/tcp
success
[root@tomcatsrv1 ~]# firewall-cmd --reload
success
[root@tomcatsrv1 ~]# firewall-cmd --list-all
public (active)
 target: default
 icmp-block-inversion: no
 interfaces: ens160
 sources:
 services: cockpit dhcpv6-client http ssh
 ports: 8080/tcp
 protocols:
 forward: yes
 masquerade: no
 forward-ports:
 source-ports:
```

Now , do remote testing ...