


危険度スコア R ごとの経路表示（色・不透明度）

$R = \max(0.08, \min(1, 0.55R_p + 0.30R_c + 0.15R_d)) \rightarrow \text{RiskToVisualMapper}$

$\alpha = 0.35 + 0.65R$ $H = (1-R) \times 180^\circ$ $S = 0.4 + 0.6R$ $V = 0.5 + 0.3R$

上段：色のみ（不透明） / 下段：不透明度込み（市松模様の上） / 表示は $d \leq 13.6 \text{ m}$ のみ

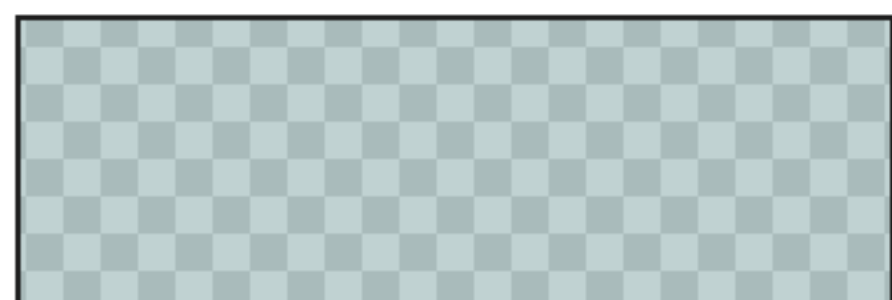

R = 0

青緑・うすい

$H = 180^\circ$

$\alpha = 0.350$

$S = 0.40$ $V = 0.50$

#4C7F7F

R = 0.25

緑・ややうすい

$H = 135^\circ$

$\alpha = 0.512$

$S = 0.55$ $V = 0.57$

#419256

R = 0.5

黄緑・中くらい

$H = 90^\circ$

$\alpha = 0.675$

$S = 0.70$ $V = 0.65$

#6BA531

R = 0.75

橙黄・やや濃い

$H = 45^\circ$

$\alpha = 0.838$

$S = 0.85$ $V = 0.72$

#B8911B

R = 1

赤・はっきり

$H = 0^\circ$

$\alpha = 1.000$

$S = 1.00$ $V = 0.80$

#CC0000

危険度 R ごとの色相・不透明度（数値）

R	見た目	H	S	V	a	RGB	
0	青緑・うすい	180°	0.40	0.50	0.350	#4C7F7F	
0.25	緑・ややうすい	135°	0.55	0.57	0.512	#419256	
0.5	黄緑・中くらい	90°	0.70	0.65	0.675	#6BA531	
0.75	橙黄・やや濃い	45°	0.85	0.72	0.838	#B8911B	
1	赤・はっきり	0°	1.00	0.80	1.000	#CC0000	

R = 0 （青緑・うすい）



色相 $H = 180^\circ$

彩度 $S = 0.40$ 明度 $V = 0.50$

不透明度 $\alpha = 0.350$ ($\alpha = 0.35 + 0.65R$)

RGB = (76, 127, 127) #4C7F7F

R = 0.25 (緑・ややうすい)



色相 H = 135°

彩度 S = 0.55 明度 V = 0.57

不透明度 α = 0.512 (α = 0.35 + 0.65R)

RGB = (65, 146, 86) #419256

R = 0.5 (黄緑・中くらい)




色相 H = 90°

彩度 S = 0.70 明度 V = 0.65

不透明度 α = 0.675 (α = 0.35 + 0.65R)

RGB = (107, 165, 49) #6BA531

R = 0.75 (橙黄・やや濃い)



色相 H = 45°
彩度 S = 0.85 明度 V = 0.72
不透明度 α = 0.838 (α = 0.35 + 0.65R)
RGB = (184, 145, 27) #B8911B

R = 1 （赤・はっきり）



色相 H = 0°

彩度 S = 1.00 明度 V = 0.80

不透明度 α = 1.000 (α = 0.35 + 0.65R)

RGB = (204, 0, 0) #CC0000