

VAYN shoulder · milling drawing · 21 Carrier-1 rear

FRONT · Z horizontal, +X up




scale 1.94:1 view span 14.0 × 60.0 mm

END · from the arm side (+Z)

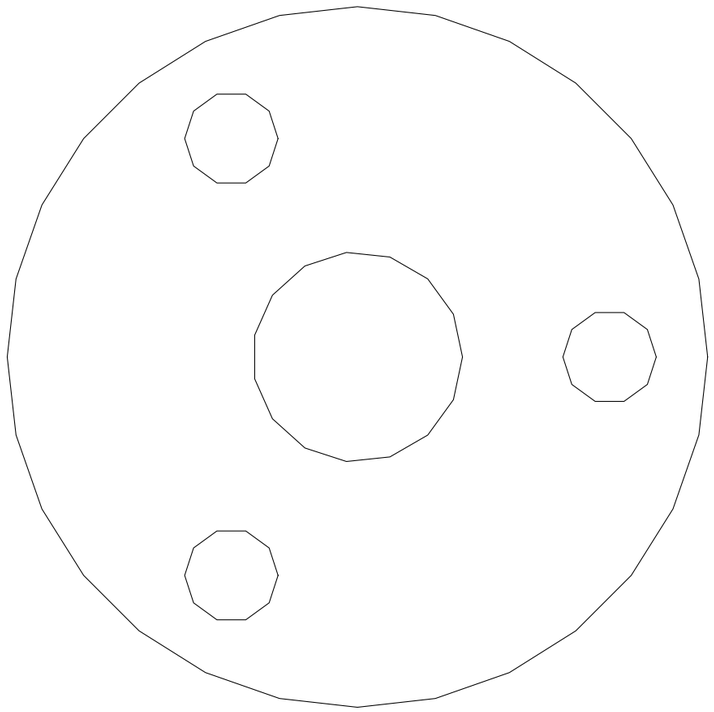


scale 1.90:1 view span 60.0 × 60.0 mm

SIDE · Z horizontal, +Y up

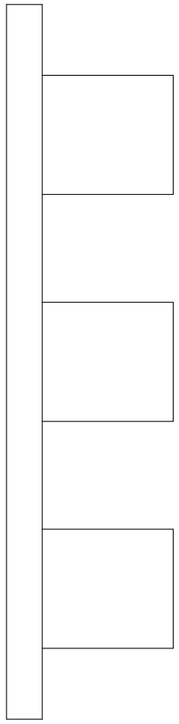

scale 1.94:1 view span 14.0 × 60.0 mm

ISOMETRIC

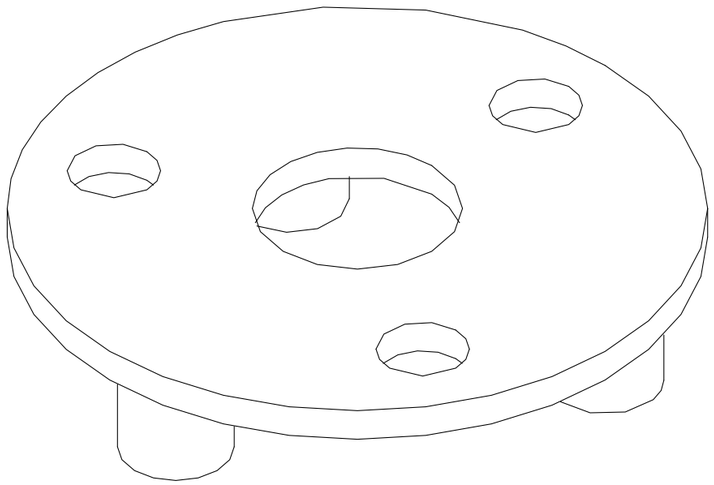

scale 1.90:1 view span 60.0 × 40.5 mm

21

Carrier-1 rear

Quantity in this actuator: 1
Material: 20MnCr5
Group: Carriers
Finished size: Ø60 × 14 mm, three posts
Mass: 76.06 g each
Model bounding box, X × Y × Z: 60.0 × 60.0 × 14.0 mm
Raw stock: Same 20MnCr5 bar
Process: CNC mill
Heat treatment / finish: Leave annealed. Do not carburize.
STEP solid: 21 Carrier-1 rear (20MnCr5)

Controlled features

- 3 × Ø8 mm R7 pin holes on Ø43.2 mm.
- Posts tapped M3, on Ø44 mm.
- R7 on an h6 pin is 4–28 µm interference.

STEP file is the geometric master. Do not scale this sheet. Sizes not listed here follow ISO 2768-1 class m and ISO 2768-2 class K. Drawing 21_carrier_1_rear.pdf