

Product Name	Blender	Factory	MYLUX	Date	2026/5/13
P.O. No.	LS_H260311	Product Rating	220-230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01FWH	Destination	Korea	Brand	HUROM
Order Qty	2700PCS	Standby Qty	0	INSP. QTY.	2700PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2605070001-EF2605072700			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 02

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	3	4	0	
MINOR:	4.0	10	11	7	




NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Nameplate sticker misaligned	0	0	2
2	Scratch mark on base	0	0	4
3	Dirt mark on base	0	0	1
4				
5				
6				
7				
Total :		0	0	7


Remark:
1、All the unacceptable products above, MYLUX will rework.
2、The defective photos are as shown below.

(1) Defect Photo	
	
1. Nameplate sticker misaligned - minor	2. Nameplate sticker misaligned - minor

	
3. Scratch mark on base - minor	4. Scratch mark on base - minor
	
5. Scratch mark on base - minor	6. Scratch mark on base - minor
	
7. Dirt mark on base - minor	

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certificatio n	RESUL T	PHOTO
Supply cord	Toong Yean Plastic Ind. Co.,Ltd.	H03 VVH2-F (60227 IEC 52)	2x0.75mm ²	KC	P	
Plug	Toong Yean Plastic Industrial Co.,Ltd.	TY-019	AC250V, 16A	KC	P	
Motor	Xiamen YOuo Intelligent Technology Co., Ltd	M7643CAV2223 P160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co.Ltd.	17AM1 039A5+PTC	AC 250V, 160 ℃	IEC	P	

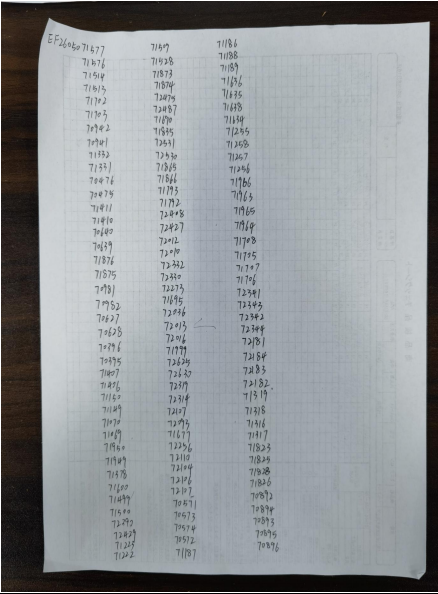
X-capacitor	Tenta Electric Industrial Co., Ltd.	MEX	0.33uF, 275VAC, X2, 40/100/21	IEC	P	
Y-capacitor	Jyh Chung	JY	Y2, 300V~, 4700pF, 40/125/21	IEC	P	
Micro switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	250V~, 5A, 3E4, T125	IEC	P	
Switch	zhejiang Jialong Electron Co., Ltd.	KAN-9-GG-1	250V~, 10 (3) A, T85, 10E3	IEC	P	

(3) Check the CDF record photos

Power plug	Toong Yean Plastic Industrial Co., Ltd	TY-019	AC250 V, 16 A	KC
- (Alt.)	Toong Yean Plastic Ind. Co., Ltd.	H05 VVH2-F (60227 IEC 53)	2 x 0.75 mm ²	KC
Motor	Xiamen YOUo Intelligent Technology Co., Ltd	M7643CAV22 23P160F	AC220 - 230 V 50 - 60 Hz 900 W, Class F	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co, Ltd.	17AM1 039A5+PTC	AC 250 V, 160 °C	IEC
- Y capacitor	Success Electronics Co Ltd	SF	Y2, 300 V ~, 4 700 pF, 40 / 125 / 56	IEC
- (Alt.)	Tenta Electric Industrial Co., Ltd.	MEX	0.33 μF, 275 VAC, X2, 40 / 100 / 21	IEC
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250 VAC, 10(3) A, T85, 1E4, GWT 850	IEC
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125 / 250 V ~, 3 E4, T125; 10(5) A, 125 / 250 V ~, 1E4, T125, GWT 850	IEC

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the KC report (report No. HU071120-23014C)

(4) SERIAL NUMBER of INSPECTED UNITS											
SERIAL NUMBER FORMAT AND RANGE:				The numbers below							
											

(5) DATA TEST											
NO.	Test Item \Serial NO.	1576	1703	1331	0476	1410	1876	0982	0627	Blank	Blank
1	Rated Power NO-load power (244-320W)	302	297	294	307	301	291	290	303	Blank	Blank
	500mL load rated water test load power (650-760W)	709	704	697	693	707	692	698	704	Blank	Blank
	700mL load rated water test load power (720-890W)	807	805	811	799	796	807	793	799	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0395	1150	1069	1378	2429	1222	1874	2487	2530	1866
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test (≤0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85±5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	1792					2010				

7	No-load Speed Test (18000-22000rpm)	19529rpm		19084rpm		
NO.	Test Item \Serial NO.	2273		1999		
8	Noise Test ≤90dB (1m, 700mL)	79.3dB		78.6dB		
NO.	Test Item \Serial NO.	2319		1677		
9	Jar Container Capacity 700mL±35mL	701.5mL		701.5mL		
	Jar Container Capacity 500mL±25mL	500.5mL		501.0mL		
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	2110	0571	1187	1636	1255
10	Press the button force: 0.7-2.3kgf	1.4	1.3	1.4	1.4	1.4
	Jar lid and filp lid: Locking force is 1.5- 3kgf.cm	1.8	1.8	1.7	1.9	1.7
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.4	1.3	1.3	1.4	1.5
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un- locking force is 15- 30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	1963				



INSPECTION REPORT

6/6

REPORT NO. : [LZX20260513-2](#)

11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass	
(6) INFORMATION CHECK LIST			
NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	220-230V, 50-60Hz, 900W	P
2	BAR CODE	ON GIFT BOX 8809686402618	P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、 Jar (700mL) *1、 Cup cap*2、 Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P
(7) OTHER			
Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 6.89kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	445×361×353mm	448×365×358mm	P
Gift Box Size	346×215×333mm	350×218×338mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE