

SPIRE/SPIFFE: Concepts, Configuration, and Infrastructure

What Is Running on This Cluster

Trust domain: ipc.local

SPIRE Server — StatefulSet (1 replica) on the cluster, NFS-backed SQLite for the CA keys and registration entries, listening on gRPC port 8081 via a headless service. Flux manages it from `manifests/spire/`.

SPIRE Agent — DaemonSet on all 6 nodes. `hostPID`: `true` (required for workload attestation). Exposes the Workload API at `/run/spire/sockets/agent.sock` as a `hostPath` volume. Each agent bootstraps trust using the `spire-bundle` ConfigMap, which the server populates with its CA cert via the `k8s bundle` notifier.

Cluster Architecture

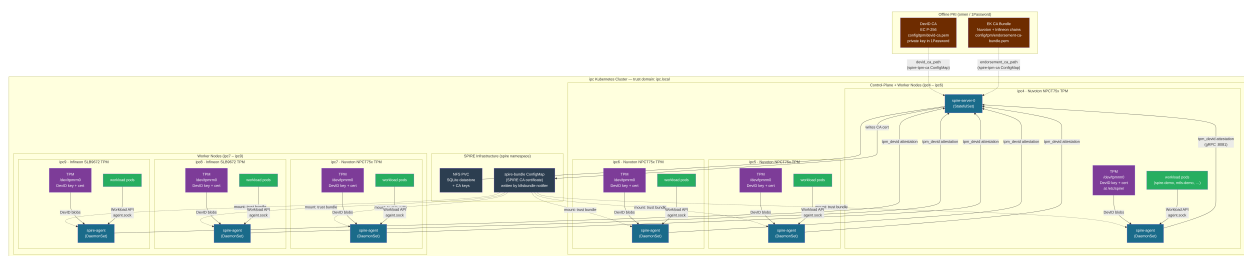


Figure 1: SPIRE cluster architecture — nodes, agents, server, TPMs, and workloads

SPIFFE and SPIRE — the Concepts

SPIFFE (Secure Production Identity Framework For Everyone) is a standard, not software. It defines:

- A URI format for workload identity: `spiffe://<trust-domain>/<path>`
- What a valid credential (SVID) looks like
- How an agent presents that credential to workloads (the Workload API)

SPIRE is the reference implementation of SPIFFE: a server that acts as a CA and a registration database, plus per-node agents that handle attestation and SVID issuance.

Node Attestation

The agent can't just claim "I'm a legitimate node" — the server needs proof. **Node attestation** is how the agent proves to the server that it's running on a real, authorized Kubernetes node.

This cluster uses **k8s_psat** (Kubernetes Projected Service Account Token):

1. Kubernetes issues a short-lived projected SAT to the agent pod (audience: `spire-server`, expiry: 7200s). This token is in the pod's filesystem at `/var/run/secrets/tokens/`.
2. The agent sends this token to the SPIRE server over gRPC.

3. The server calls the Kubernetes **TokenReview API** to validate it — Kubernetes confirms the token is real, which SA issued it, and which pod it was issued to.
4. The server checks its allow-list (**spire:spire-agent SA**) and grants the agent a **Node SVID** with SPIFFE ID **spiffe://ipc.local/k8s-node**.

From that point on, the agent authenticates to the server using the Node SVID (mTLS on the gRPC channel). The PSAT is only used once for initial bootstrapping.

Why PSAT instead of something else? These nodes have no TPM, no cloud provider identity (AWS EC2 instance identity documents, GCP GCE tokens, etc.), and no pre-provisioned join token — PSAT is the right choice for bare-metal Kubernetes. The trust root is “Kubernetes itself validated this token.”

Note: this cluster has been upgraded to TPM DevID node attestation (**tpm_devid**). The **k8s_psat** description above is retained as conceptual background; the actual implementation uses the hardware TPM and is documented in the TPM Attestation sections.

TPM DevID Node Attestation Flow

Workload Attestation

After a node is attested, the agent needs to verify that a calling workload is what it claims to be before issuing an SVID. This happens entirely on-node; no server round-trip is needed.

The flow for this cluster (**k8s** workload attestor):

1. Workload connects to **/run/spire/sockets/agent.sock** (a Unix domain socket).
2. The agent reads **SO_PEERCRECRED** from the socket — this gives the calling process’s PID. This is why **hostPID: true** is required; without it, PIDs are namespaced and **SO_PEERCRECRED** returns 0.
3. The agent reads **/proc/<pid>/cgroup** to extract the container ID.
4. The agent calls the **kubelet API** (using **MY_NODE_NAME**) to get pod metadata for that container: namespace, service account, pod name, labels, etc.
5. The agent compares that metadata against its **registration entries** (syncd from the server).
6. If a match is found, the agent issues an SVID for the matching SPIFFE ID.

use_new_container_locator: true in the agent config causes the agent to try **mountinfo** first (more reliable with **cgroupv2**) before falling back to the **cgroup** path.

Pelagos Compatibility Fixes

Two Pelagos bugs affected SPIRE workload attestation on this cluster:

Bug	Symptom	Fixed
hostPID: true ignored (#299)	SO_PEERCRECRED returned PID 0; server rejected	v0.65.7
32-char container IDs (#301)	SPIRE regex expected 64-char hex; attestation failed	v0.65.8

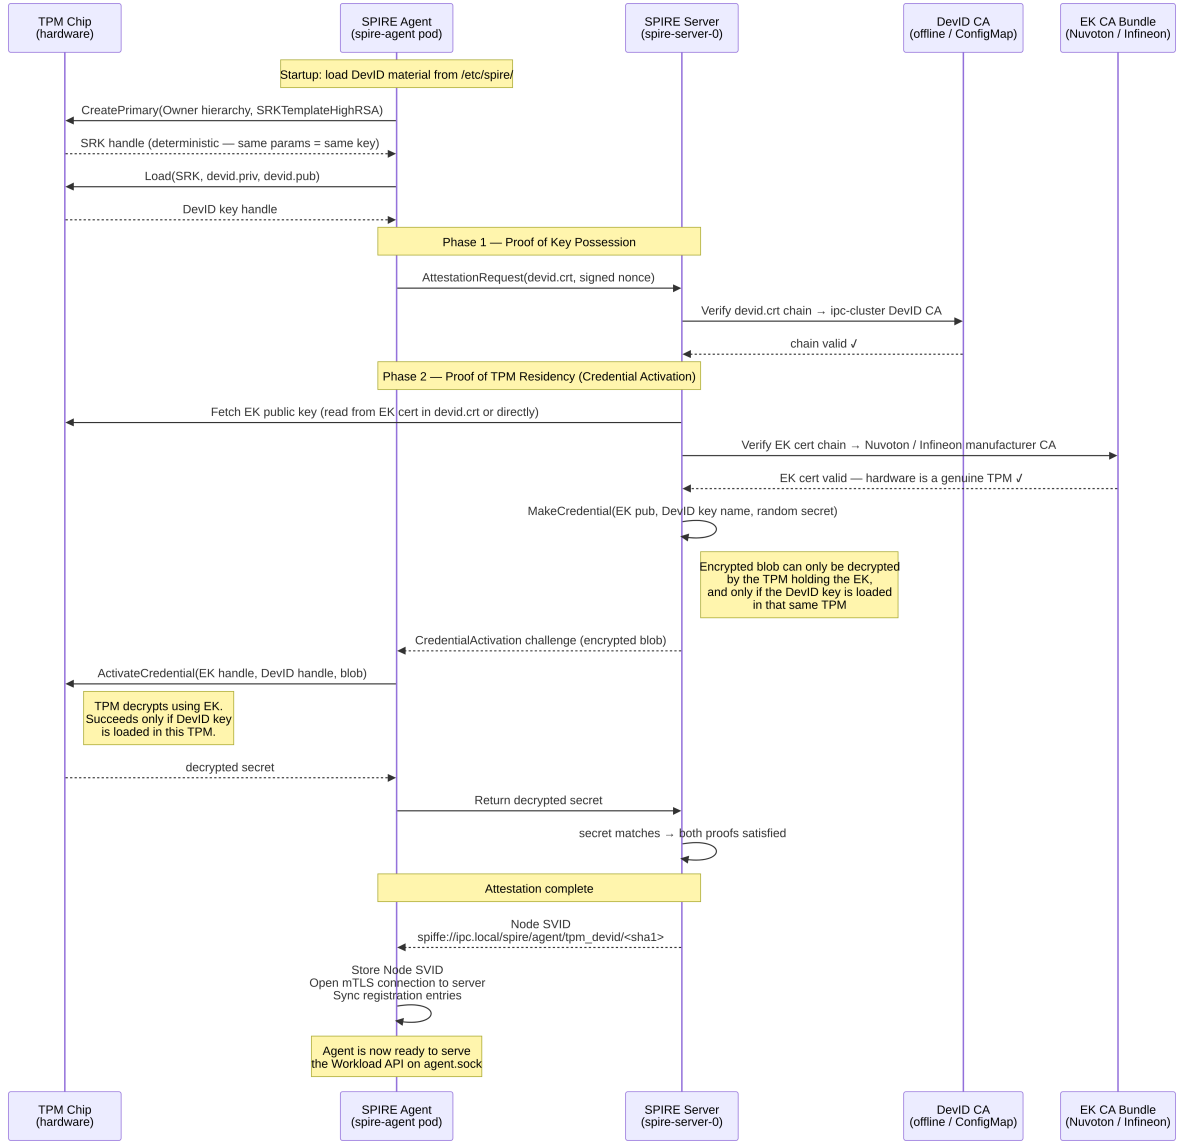


Figure 2: TPM DevID node attestation sequence

Both are fixed in the running version (v0.65.47).

Workload Attestation Flow

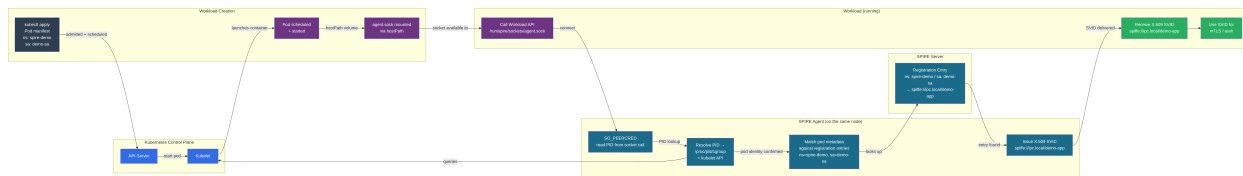


Figure 3: Workload attestation flow

Registration Entries

Registration entries are the policy database — they tell the server (and thus agents) which workloads should receive which SPIFFE IDs. Each entry has:

- **SPIFFE ID**: the identity to issue (`spiffe://ipc.local/demo-app`)
- **Parent ID**: who must attest the caller first (`spiffe://ipc.local/k8s-node` — meaning “the workload must be on an attested node”)
- **Selectors**: the conditions that must all match (`k8s:ns:spire-demo, k8s:sa:demo-sa`)

Current Pattern: Imperative Registration

A Kubernetes Job runs `kubectl exec` into the server pod and calls `spire-server entry create`. This works but has a GitOps gap — entries live in SQLite on the NFS PVC, not in Git. If the PVC is lost or the cluster is rebuilt, entries must be re-registered.

GitOps Alternative: ClusterSPIFFEID

The **SPIRE Controller Manager** provides a `ClusterSPIFFEID` CRD. Entries are declared as Kubernetes resources in Git; the controller reconciles them into SPIRE continuously. This closes the GitOps gap. Architected in `docs/spire-trust-chain-clusterspiffeid.mmd` but not yet deployed.

SVIDs — the Two Forms

SVID = SPIFFE Verifiable Identity Document. Two formats:

X.509 SVID

A standard X.509 certificate with one key addition: the SPIFFE ID is encoded in the certificate’s **Subject Alternative Name (SAN)** as a URI (`spiffe://ipc.local/demo-app`). Inspect with:

```
openssl x509 -in svid.pem -text -noout | grep URI
```

Properties:

- **Short-lived** (default TTL: 1 hour). The agent rotates them automatically before expiry, typically at the 50% mark.
- Carries the full chain: leaf cert + intermediate(s) up to the trust bundle.
- Used for **mTLS** — both sides present their SVID as the TLS client/server cert, and verify the peer's cert against the trust bundle. This is what experiment 21 demonstrates.
- Opaque to network intermediaries (the identity is in the cert, not the payload).

JWT SVID

A signed JWT with the SPIFFE ID in the `sub` claim and an `aud` (audience) claim.

Properties:

- Also short-lived. **Not** automatically rotated — the workload must re-fetch when it needs a fresh one.
- Used when mTLS is not possible: HTTP APIs where identity must be passed in a header (`Authorization: Bearer <jwt>`), or when a network intermediary (load balancer, API gateway) terminates TLS before reaching the workload.
- The receiving service verifies the JWT signature against the trust bundle's public key, not by doing a TLS handshake.
- Fetch with: `spire-agent api fetch jwt -audience <target-service> -socketPath ...`
- The **audience field matters**: a JWT fetched for audience `api-gateway` won't be accepted by a verifier expecting `payments-service`. This prevents token replay across services.

When to Use Which

Scenario	Format
Service-to-service where you control both ends	X.509 (mTLS)
HTTP API, identity passed in header	JWT
Identity through a TLS-terminating proxy	JWT
Authenticating to Vault (JWT auth method)	JWT
Envoy/service mesh transparent mTLS	X.509

The Trust Bundle

The trust bundle is the SPIRE CA's root certificate(s). Everything signed by SPIRE is verifiable against it. On this cluster:

- The server writes it to the `spire-bundle` ConfigMap in the `spire` namespace (via the `k8s_bundle` notifier).
- Agents mount it at startup to bootstrap their TLS connection to the server.
- Workloads receive it alongside their SVID when calling the Workload API — so they can verify peers without any pre-shared secrets or manual cert distribution.

Trust bundle rotation: If the server's CA rotates (either on schedule or forced), it publishes the new root alongside the old one during a transition window. SVIDs issued under the old CA remain valid until expiry; verifiers must accept both roots during the overlap. This is automatic in SPIRE.

Experiments Running on This Cluster

Experiment 11: Workload SVID Fetch

Namespace `spire-demo`, service account `demo-sa`. A demo pod fetches its X.509 SVID via the Workload API and prints the SPIFFE ID and cert details using `openssl`. Proves end-to-end attestation works.

Registration entries created by an imperative Job:

SPIFFE ID	Parent	Selectors
<code>spiffe://ipc.local/k8s-node</code>	<code>spiffe://ipc.local/spire-server</code>	<code>kubernetes:cluster:ipc (node entry)</code>
<code>spiffe://ipc.local/demo-app</code>	<code>spiffe://ipc.local/k8s-node</code>	<code>kubernetes:spire-demo, k8s:sa:demo-sa</code>

Experiment 21: mTLS Between Two Workloads

Namespace `mtls-demo`. An `mtls-server` and `mtls-client` each receive unique X.509 SVIDs from SPIRE. The server runs `openssl s_server` requiring client cert (`-Verify 1`); the client runs `openssl s_client` presenting its SVID. Both sides verify against the SPIRE trust bundle. Zero pre-shared secrets.

SPIFFE ID	Workload
<code>spiffe://ipc.local/mtls-server</code>	<code>mtls-server</code> Deployment (<code>mtls-server-sa</code>)
<code>spiffe://ipc.local/mtls-client</code>	<code>mtls-client</code> Pod (<code>mtls-client-sa</code>)

TPM Hardware on This Cluster

All six nodes have TPM 2.0 chips with manufacturer-provisioned Endorsement Key (EK) certificates stored in TPM NV (non-volatile) memory. The EK cert is the hardware root of trust: it is signed by the manufacturer's CA at the factory and proves that the EK private key is bound to a specific, real TPM chip. The EK private key never leaves the chip.

EK Certificate Inventory

Node	Chip	Manufacturer	EK Cert Issuer	Valid Until
ipc4	Nuvoton NPCT75x	Nuvoton (TW)	NPCTxxx ECC384 LeafCA 022111	2043
ipc5	Nuvoton NPCT75x	Nuvoton (TW)	NPCTxxx ECC384 LeafCA 022111	2043
ipc6	Nuvoton NPCT75x	Nuvoton (TW)	NuvotonTPMRootCA2210	2042

Node	Chip	Manufacturer	EK Cert Issuer	Valid Until
ipc7	Nuvoton NPCT75x	Nuvoton (TW)	NuvotonTPMRootCA2211	2042
ipc8	Infineon SLB9672	Infineon (DE)	OPTIGA(TM) TPM 2.0 RSA CA 061	2037
ipc9	Infineon SLB9672	Infineon (DE)	OPTIGA(TM) TPM 2.0 RSA CA 061	2037

`tpm2-tools` is installed on all nodes (`apt install tpm2-tools`). The EK cert can be read with `sudo tpm2_getekcertificate -o /tmp/ek.crt`.

Are Nuvoton and Infineon Equivalent?

For SPIRE attestation: yes, completely. The TPM 2.0 attestation protocol is standardized by the TCG (Trusted Computing Group) and is identical regardless of manufacturer. SPIRE validates the EK cert chain and does a challenge-response over the EK private key; the manufacturer is irrelevant to the protocol.

In general terms, Infineon OPTIGA is the dominant TPM manufacturer globally and is used in FIPS-certified and government-cleared systems. Nuvoton NPCT is a legitimate TCG-certified TPM 2.0 part commonly shipped by HP in their business machines. Neither has active unpatched vulnerabilities. The historical ROCA vulnerability (CVE-2017-15361) affected Infineon RSA key *generation* in old firmware; ipc8/9 run firmware 15.0.0.22, well past the patched version.

ipc8/9 have both RSA and ECC EK certs (Infineon provisions both; Nuvoton nodes only have one). ECC P-384 is more modern than RSA 2048 — a mild theoretical advantage, not meaningful in practice.

ipc6 and ipc7 have different Nuvoton root CAs (2210 vs 2211) despite being the same hardware model. This reflects different manufacturing batches. For SPIRE attestor configuration you will need to trust all four manufacturer CA chains: two Nuvoton, one Infineon RSA, one Infineon ECC.

What Happens After 2037 (ipc8/9 EK Cert Expiry)?

You do not replace the TPM or the hardware. The TPM chip is permanent — it's soldered to the motherboard. What expires in 2037 is the manufacturer-signed *certificate* for the EK public key, not the EK key itself. The hardware continues to function normally.

What changes is your attestation policy. Currently, full EK cert chain validation works like this: “I trust this node because its EK cert chains to Infineon’s CA, which means Infineon vouches that this is a real TPM.” After expiry, that chain is stale.

The alternative — which is always available and is what most production deployments use alongside cert-chain validation — is **EK public key fingerprinting**: during initial enrollment, you record the EK public key of each node. The attestor then checks: “I trust this node because it can prove possession of the private key corresponding to *this enrolled public key*.” There is no expiry on a public key fingerprint. You lose the manufacturer-provenance guarantee (that the key is in a real TPM) but retain the cryptographic identity guarantee (that this is the same hardware you enrolled).

In practice for this cluster: re-enrollment in 2037 is the right move — you run through node attestation setup once more at that point and record the EK fingerprints. Or you pre-enroll fingerprints now alongside cert chain validation, and the transition in 2037 is a config change rather than a re-enrollment.

TPM Attestation: Plugin Choice and Implementation Plan

Plugin: `tpm_devid` (built-in to SPIRE)

SPIRE 1.9.6 has a native TPM node attestor called `tpm_devid`, stable since SPIRE 1.0.1 (2021). No external plugins are needed. The Bloomberg community plugin (`bloomberg/spire-tpm-plugin`) is archived and unmaintained — ignore it.

How `tpm_devid` Attestation Works

The attestation is two-part, which is what makes it stronger than a simple hardware value check:

1. **Proof of key possession** — the agent signs a server-issued nonce with its DevID private key. The server verifies the signature against the DevID certificate's public key.
2. **Proof of TPM residency** — the server performs a **credential activation challenge** using the node's EK public key. It encrypts a secret to the EK such that only the TPM holding the EK can decrypt it, and only if the DevID key is also loaded in that same TPM. The agent returns the decrypted secret, proving both keys reside in the same physical chip.

This two-part proof means an attacker can't just copy key material off a node — possession of the DevID private key blob is not enough; it must be activated inside the TPM that holds the EK.

The SPIFFE ID issued by the `tpm_devid` attestor takes the form: `spiffe://ipc.local/spire/agent/tpm_devid/`

What `tpm_devid` Requires

Per node (out-of-band provisioning): - A DevID key pair generated inside the TPM — the private key never leaves the chip; it exists only as an encrypted TPM key blob (`devid.priv`) paired with a public key blob (`devid.pub`) - A DevID certificate signed by a CA you control (the DevID CA), containing the public key

SPIRE Server: - `devid_ca_path` — the DevID CA cert (validates the DevID cert chain on each agent) - `endorsement_ca_path` — all manufacturer EK CA certs (validates the EK cert chain, completing the hardware root-of-trust verification)

This cluster requires four EK CA certs: Nuvoton NPCTxxx LeafCA 022111, NuvotonTPM-RootCA2210, NuvotonTPMRootCA2211, and Infineon OPTIGA TPM 2.0 RSA CA 061.

SPIRE Agent: - `devid_cert_path` — path to the signed DevID certificate (PEM) - `devid_priv_path` — path to the TPM private key blob - `devid_pub_path` — path to the TPM public key blob

Migration Impact

Switching from `k8s_psat` to `tpm_devid` invalidates all existing agent registrations — the Node SVID format changes. The SPIRE server's registration database must be cleared and the registration jobs

re-run after the switch. Since entries are currently managed by imperative Jobs, this is re-running those jobs, not a data migration.

TPM Attestation: Implementation — What Was Built

All seven phases are complete. This section documents what was actually implemented, including the non-obvious technical details discovered during the process.

Phase 1 — DevID CA (complete)

An offline EC P-256 CA (20-year validity) was generated on omen and used exclusively to sign node DevID certificates.

- **Private key:** stored in 1Password as `ipc-cluster DevID CA key` (Private vault, notes field). Never written to disk longer than the signing operation; shredded immediately after storage.
- **Public cert:** `config/tpm/devid-ca.pem` — committed to Git (public material only).
- **Signing:** the provisioning script retrieves the key via `op item get ... | tr -d '"'` (the `op` CLI wraps field values in double quotes; stripping is required for the PEM to be valid).

Phase 2 — Manufacturer EK CA Bundle (complete)

Six CA certificates assembled into `config/tpm/endorsement-ca-bundle.pem`. All URLs were discovered from the AIA (Authority Information Access) extensions in the live EK certificates on each node via `tpm2_getekcertificate + openssl x509 -text`.

The bundle is two full chains, not four flat certs:

Chain	Nodes	Certs
Nuvoton ECC521	ipc4, ipc5	Root (NPCTxxx ECC521 RootCA) → Intermediate (NPCTxxx ECC384 LeafCA 022111)
Nuvoton 2210	ipc6	Self-signed root (NuvotonTPMRootCA2210)
Nuvoton 2211	ipc7	Self-signed root (NuvotonTPMRootCA2211)
Infineon RSA	ipc8, ipc9	Root (OPTIGA RSA Root CA 2) → Intermediate (OPTIGA TPM 2.0 RSA CA 061)

The EK CA bundle is the proof that an EK cert was signed by a real manufacturer. Without it, SPIRE cannot verify that the TPM presenting the EK is a genuine hardware chip.

Phase 3 — Node Provisioning Script (complete)

`scripts/provision-tpm-devid.sh` runs from omen, provisions one node end-to-end, and is idempotent (skips if a valid cert signed by our CA already exists with >30 days to expiry).

What the script does:

1. Installs `tpm2-openssl` on the node (`apt install tpm2-openssl`)
2. Creates the SRK (Storage Root Key) primary under the **Owner hierarchy** (`-C o`)
3. Creates the DevID child key under the SRK
4. Loads the key and persists it to a temporary NV handle (`0x81010001`)
5. Generates a CSR via the `tpm2` OpenSSL provider — the TPM signs the CSR internally
6. Evicts the NV handle — SPIRE uses blob files, not handles
7. Strips the 2-byte TPM2B wrapper from both blob files (see below)
8. Scp's the CSR to omen; retrieves the DevID CA key from 1Password; signs the cert
9. Installs the signed cert at `/etc/spire/devid.crt`; verifies it chains to the DevID CA
10. Cleans up temporary files; leaves `/etc/spire/` with `devid.crt`, `devid.priv`, `devid.pub`, `devid_pubkey.pem`

Critical implementation details discovered during integration:

Primary key hierarchy: The primary must be under the **Owner hierarchy** (`-C o`), not the Endorsement hierarchy (`-C e`). SPIRE's `tpm_devid` plugin recreates the primary at startup using `SRKTemplateHighRSA()` from `go-tpm-tools`, which calls `tpm2.CreatePrimaryEx` against `tpm2.HandleOwner`. In the TPM, primary keys are deterministic — same parameters + same hierarchy = same key. If the provisioning script uses the Endorsement hierarchy but SPIRE uses the Owner hierarchy, the primaries are different keys and SPIRE cannot load the DevID child blobs.

Primary key attributes (must match SPIRE's `SRKTemplateHighRSA()` exactly):

```
-G rsa
-a "fixedtpm|fixedparent|sensitiveorigin|userwithauth|noda|restricted|decrypt"
```

The symmetric cipher (AES-128-CFB) is implied by `restricted|decrypt` in `tpm2-tools` 5.7. Do NOT use `-G rsa2048:aes128cfb:null` — that compound form is not accepted.

DevID key signing scheme must be `rsa:rsassa` (RSASSA-PKCS1-v1.5), not `rsa` (which defaults to null scheme). With a null scheme, `go-tpm`'s `DecodePublic` returns a `Public` struct where `RSAParameters.Sign` is nil, causing a nil pointer dereference in the `tpm_devid` plugin.

Blob format — stripping the TPM2B prefix: `tpm2_create -u/-r` outputs blobs in `TPM2B_PUBLIC` / `TPM2B_PRIVATE` format (2-byte big-endian size + payload). SPIRE's `go-tpm` library expects the raw payload without that prefix: - `tpm2.DecodePublic(pubBytes)` decodes raw `TPMT_PUBLIC` directly - `tpm2.Load(... privateBlob)` packs the private blob via `U16Bytes()`, adding the prefix itself — so the file must NOT already have one

The strip must happen **after** `tpm2_load` (which needs the full TPM2B wrappers to load the key), not before:

```
dd if=devid.pub bs=1 skip=2 of=devid.pub.raw && mv devid.pub.raw devid.pub
dd if=devid.priv bs=1 skip=2 of=devid.priv.raw && mv devid.priv.raw devid.priv
```

CSR generation via `tpm2-openssl`: Standard `openssl req -key` cannot use a TPM public key PEM as if it were a private key. Instead: install `tpm2-openssl`, persist the DevID key to a TPM NV handle, and generate the CSR through the TPM provider:

```
openssl req -provider tpm2 -provider default -key "handle:0x81010001" -new -out devid.csr ...
```

The private key signs the CSR data inside the TPM chip. After the CSR is fetched, evict the handle — SPIRE only needs the blob files.

Phase 4 — SPIRE Server Config (complete)

`manifests/spire/server-config.yaml`: `k8s_psat` attestor replaced with `tpm_devid`:

```
NodeAttestor "tpm_devid" {
  plugin_data {
    devid_ca_path      = "/run/spire/tpm-ca/devid-ca.pem"
    endorsement_ca_path = "/run/spire/tpm-ca/endorsement-ca-bundle.pem"
  }
}
```

`manifests/spire/server-tpm-ca.yaml`: new `ConfigMap` carrying both CA files, mounted into the `StatefulSet` at `/run/spire/tpm-ca/`.

`manifests/spire/server-rbac.yaml`: the server `ClusterRole` was stripped of `tokenreviews`, `subjectaccessreviews`, `nodes`, and `Pods`. With `tpm_devid`, the server does not call the Kubernetes API at all — attestation is purely TPM-driven. The Role (managing the `spire-bundle` `ConfigMap`) was kept.

Phase 5 — SPIRE Agent Config and DaemonSet (complete)

`manifests/spire/agent-config.yaml`: `k8s_psat` replaced with `tpm_devid`:

```
NodeAttestor "tpm_devid" {
  plugin_data {
    devid_cert_path = "/etc/spire/devid.crt"
    devid_priv_path = "/etc/spire/devid.priv"
    devid_pub_path  = "/etc/spire/devid.pub"
    tpm_device_path = "/dev/tpmrm0"
  }
}
```

`tpm_device_path` is set explicitly. Without it, the plugin auto-detects, which failed inside the container even after the device was mounted.

`manifests/spire/agent-daemonset.yaml`: two volume changes: - **Added**: `/dev/tpmrm0` as a `CharDevice` `hostPath` — the SPIRE agent must open the TPM device directly to execute the `Load` command and credential activation challenge. `/dev/tpmrm0` (the resource manager) is used rather than `/dev/tpm0` (the raw device) because the resource manager handles concurrent access from multiple processes. - **Removed**: projected service account token volume (`spire-token`) — no longer needed since node attestation is TPM-based, not PSAT-based.

Phase 6 — Deploy and Re-register (complete, 2026-07-09)

Server rolled first. Log confirms:

Plugin loaded: `plugin_name=tpm_devid plugin_type=NodeAttestor`

All 6 agents attested successfully. Each node received a unique SPIFFE ID derived from the SHA-1 fingerprint of its DevID certificate:

Node	SPIFFE ID (agent)
ipc4	spiffe://ipc.local/spire/agent/tpm_devid/42a1e85ad43b4c136b83573d0b4ac60b
ipc5	spiffe://ipc.local/spire/agent/tpm_devid/78d5a22ca1d23e1fcf7e18258bcdcf34
ipc6	spiffe://ipc.local/spire/agent/tpm_devid/8cbaa975848b0c844f7a3197f6240c35
ipc7	spiffe://ipc.local/spire/agent/tpm_devid/31dc39d59d115c652b1d46e9f5b8dd2d
ipc8	spiffe://ipc.local/spire/agent/tpm_devid/4acd537f6b1e99624917a59bce683559
ipc9	spiffe://ipc.local/spire/agent/tpm_devid/f5d3754a4cf4c0f65caeb3ae027e9f03

Registration entries updated: the old node alias entry (selector `k8s_psat:cluster:ipc`) was deleted and replaced with a new one:

```
SPIFFE ID: spiffe://ipc.local/k8s-node
Parent:    spiffe://ipc.local/spire/server
Selector:  tpm_devid:issuer:cn:ipc-cluster DevID CA
-node flag set
```

The `issuer:cn` selector matches all nodes signed by our DevID CA without needing per-node entries. Workload entries (`demo-app`, `mtls-server`, etc.) were unchanged — they reference `spiffe://ipc.local/k8s-node` as their parent, which the new alias entry satisfies.

End-to-end verification: the `spire-demo/demo-workload` pod received SVID `spiffe://ipc.local/demo-app` (1-hour TTL, signed by the SPIRE CA).

Phase 7 — Reinstall Automation (complete)

`scripts/reinstall-nodes.sh` calls `provision-tpm-devid.sh` after a node rejoins k3s and is Ready. If `op` is not authenticated, the step warns but does not fail the reinstall. The operator can re-run `bash scripts/provision-tpm-devid.sh <node>` manually afterward.

Operational loop for a reinstalled node: 1. PXE reinstall completes 2. Node rejoins k3s (`join-server.sh` or `upgrade-agents.sh`) 3. `provision-tpm-devid.sh` generates a new TPM-bound DevID key, fetches CA key from 1Password, signs a new cert, installs at `/etc/spire/` 4. Flux reconciles SPIRE agent DaemonSet — agent starts, loads DevID blobs, attests via TPM 5. SPIRE server issues Node SVID matching `tpm_devid:issuer:cn:ipc-cluster DevID CA` 6. Workloads on the node can receive SVIDs

No manual SPIRE steps are needed after a node reinstall.

Topics Not Asked About That Matter

SVID Rotation for Long-Running Workloads

The experiments use an **init-container pattern**: fetch SVID once at startup, write to an emptyDir, main container uses it. This is fine for demos but won't handle rotation — after ~1 hour the cert expires and the workload has stale credentials.

For production workloads, the options are:

- **spiffe-helper**: a sidecar that watches the Workload API socket for updated SVIDs and rewrites cert files on disk, then sends `SIGHUP` to the main process.

- **SPIFFE SDK** (Go, Java, Python): native library that holds a live connection to the Workload API and delivers updated SVIDs to the application via callback.
- **Envoy SDS** (Secret Discovery Service): Envoy natively speaks the SPIFFE Workload API; it handles rotation transparently without application changes.

SPIRE HA

The current server is a single StatefulSet replica with SQLite. SQLite cannot be shared across replicas. High availability requires:

1. Switch the datastore to PostgreSQL or MySQL
2. Run multiple server replicas behind a load balancer

With a single server, a server restart means agents can't renew SVIDs during the outage. Workloads continue with cached SVIDs until they expire. Acceptable for a homelab; a consideration for production.

Federation

SPIRE supports federating trust between different SPIFFE trust domains. For example, `ipc.local` and `cloud.example.com` could exchange trust bundles so workloads in each cluster can verify SVIDs from the other. Not needed until there are multiple clusters or external partners, but the mechanism is built in to SPIRE.

The Trust Root and Security Boundary

With `tpm_devid`, the server's trust in the agent is hardware-rooted: the agent proves possession of a TPM-bound key and that the key and EK live in the same physical chip. This is strong, asymmetric cryptographic proof.

The agent's trust in the server is not symmetric. It is Kubernetes-rooted.

The bootstrap problem: before the agent can attest, it needs to establish a TLS connection to the SPIRE server. To verify the server's TLS certificate it needs a trust anchor — the SPIRE CA cert — which arrives in the `spire-bundle` ConfigMap. But the ConfigMap is not itself cryptographically authenticated. The agent has no independent way to verify “this CA cert belongs to *the* SPIRE server I am supposed to talk to.”

What the agent actually knows at bootstrap:

1. There is a CA cert at `/run/spire/bundle/bundle.crt`
2. The server it can reach presents a TLS cert signed by that CA
3. Those two facts are mutually consistent

Consistency is not proof of legitimacy. A rogue SPIRE server could publish its own CA cert into the ConfigMap and present a cert signed by it. From the agent's perspective, both situations look identical — cert matches CA, TLS handshake succeeds, proceed to attest. The agent cannot detect the substitution.

The circularity: the agent uses the bundle to authenticate the server, but the bundle itself arrived from an unauthenticated channel. Breaking this circularity requires an out-of-band trust anchor — something the agent knows before it ever contacts the server.

Current posture: the ConfigMap write is protected by RBAC. Only the `spire-server` ServiceAccount can write `spire-bundle`. This is a policy control, not a cryptographic proof. If that policy is ever violated — through a compromised ServiceAccount, a misconfigured RBAC rule, or a cluster-admin mistake — the agent cannot detect it. The `spire` namespace is the security boundary, not individual workloads.

TPM-Based Server Attestation (the fix)

The `spiffe/spire-server-attestor-tpm` project closes this gap by giving agents a cryptographic way to verify the server's identity before accepting its bundle.

The approach:

- The SPIRE server signs the trust bundle with a key held in its own TPM
- The agent, during bootstrap, verifies that signature against the server's TPM public key, which was enrolled out-of-band during provisioning
- Only if the signature is valid does the agent accept the bundle and proceed to attest

This makes both directions hardware-rooted: - **Agent** → **Server trust**: verified by TPM signature on the bundle before connection - **Server** → **Agent trust**: verified by `tpm_devid` credential activation challenge

The server's TPM is already available: `spire-server-0` runs on `ipc4`, which has a Nuvoton NPCT75x TPM with a valid EK cert. The server could be provisioned with a DevID cert using the same `scripts/provision-tpm-devid.sh` script used for the agents.

Current state: `spiffe/spire-server-attestor-tpm` was at v0.0.4 (April 2025) and described as development-phase. It is the right architectural direction but not yet production-ready. Implementing it would be the next step after the current `tpm_devid` work to achieve fully symmetric hardware-rooted trust.

Vault Integration via JWT SVID

A natural next step for this cluster (Vault is already deployed): pods can authenticate to Vault using a SPIRE-issued JWT SVID via Vault's JWT auth method. No Vault tokens or secrets need to be injected into pods. The flow is:

1. Pod fetches JWT SVID (audience: `vault`)
2. Pod calls `vault write auth/jwt/login jwt=<svid> role=<role>`
3. Vault validates the JWT against the SPIRE trust bundle (configured as a JWKS endpoint)
4. Vault returns a short-lived Vault token

This replaces Vault's Kubernetes auth method with a stronger, SPIFFE-native identity.

Configuration Reference

Key Files

Path	Purpose
<code>manifests/spire/server-config.yaml</code>	SPIRE Server ConfigMap (trust domain, attestors, storage)
<code>manifests/spire/agent-config.yaml</code>	SPIRE Agent ConfigMap (server address, attestors, socket path)
<code>manifests/spire/server-statefulset.yaml</code>	SPIRE StatefulSet + headless service
<code>manifests/spire/agent-daemonset.yaml</code>	Agent DaemonSet (hostPID, tolerations, socket hostPath)
<code>manifests/spire/server-rbac.yaml</code>	Server SA, ClusterRole (TokenReview, nodes, pods)
<code>manifests/spire/agent-rbac.yaml</code>	Agent SA, ClusterRole (pods, nodes, nodes/proxy)
<code>clusters/ipc/spire.yaml</code>	Flux Kustomization (path: <code>./manifests/spire</code> , interval: 10m)
<code>experiments/11-spire/</code>	Workload SVID fetch demo
<code>experiments/21-mtls-spire/</code>	mTLS between two workloads

Server Configuration Summary

Setting	Value
Trust domain	<code>ipc.local</code>
Node attesor	<code>k8s_psat</code> , cluster: <code>ipc</code> , allowed SA: <code>spire:spire-agent</code>
Key manager	Disk (<code>/run/spire/data/keys.json</code>)
Datastore	SQLite3 (<code>/run/spire/data/datastore.sqlite3</code>)
Notifier	<code>k8s_bundle</code> → ConfigMap <code>spire-bundle</code>
gRPC port	8081
Health port	8080 (<code>/live</code> , <code>/ready</code>)

Agent Configuration Summary

Setting	Value
Trust domain	<code>ipc.local</code>
Server	<code>spire-server:8081</code>
Trust bundle	<code>/run/spire/bundle/bundle.crt</code>
Workload API socket	<code>/run/spire/sockets/agent.sock</code>
Node attesor	<code>k8s_psat</code> , cluster: <code>ipc</code>
Workload attesor	<code>k8s</code> , <code>skip_kubelet_verification: true</code> , <code>use_new_container_locator: true</code>
Key manager	Memory
Health port	8080