



Bulletin No: 22-014

Date: 14-Feb-22


Reissued

SUBJECT: RAMP procedures reminder Post Arrival and Pre departure walk around

APPLICABLE TO: ALL RAMP PERSONNEL


Pre-departure walk-around assesment is an important step in mitigating airplane flight hazards; by observing for possible aircraft damages, FOD, The ramp conditions are suitable, GSE detached and clear, PLB is clear , aircraft path is clear of obstructions, no personnel is inside safety zone(ERA) all aircraft panels and doors are closed and secured and to report any abnormalities (damage, leaks, etc) prior to departure

MUST BE CONDUCTED WITHIN 5 minutes of ARRIVAL or 10 min. before DEPARTURE

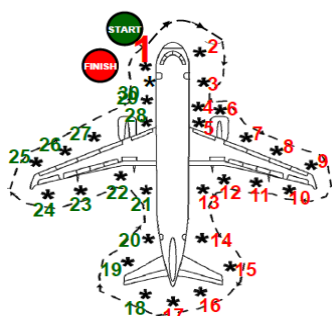

Always start your arrival Walk Around on the L1 area and then continue to the aircraft R side of the aircraft finishing back at L1 (left side of aircraft)

Always start your PRE Departure walk around on the area of L1 check the aircraft L side and then proceed to the R side of the aircraft. Finish at the L1 door area , once the Jetbridge has been removed

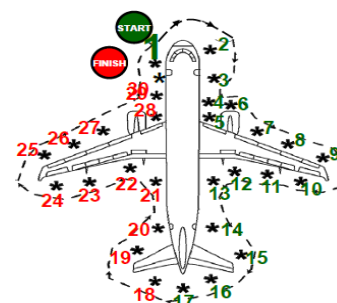

Report any finding immediately,. If any damage is found do not open/ close compartments adjacent to the damage

FOD found during walk-around



Bird on Main landing gear

Be SAFE follow all ramp safety rules and company SOP

NO walk-around performed. In-flight damage not found



Aircraft lost pannel during flight

REPORT all HAZARDS to safety@ultravi.com



ULTRA AVIATION SERVICES, INC.

General Operations Manual

APPENDIX: 1

SAFETY & SECURITY BULLETIN (U-SMS-09)

Revision: 7

Date: 02/Feb/2022

Bulletin No: 20-014

Date: 14 Feb-22


Reissued

SUBJECT: RAMP procedures reminder Post Arrival and Pre departure walk around

APPLICABLE TO: ALL RAMP PERSONNEL


La caminata previa a la salida es un paso importante para mitigar los peligros del vuelo al observar posibles daños a la aeronave, FOD, las condiciones de la rampa sean adecuadas, GSE separado y despejado, PLB está retirado, la trayectoria de la aeronave está libre de obstrucciones, no hay personal dentro zona de seguridad (ERA) todos los paneles y puertas del la avion están cerrados y asegurados e informar cualquier anomalía (daños, fugas, etc.) antes de la salida

DEBE REALIZARSE DENTRO de los 5 minutos de la LLEGADA o 10 min. antes de la salida

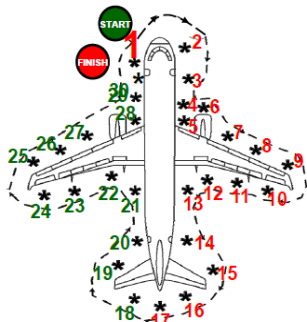

Siempre comience su caminata de llegada en el área L1 y luego continúe hacia el lado R de la aeronave terminando en L1 (lado izquierdo)


Siempre comience su caminata de salida PRE en el área de L1, verifique el lado L de la aeronave y luego continúe hacia el lado R de la aeronave. Termine en el área de la puerta L1, una vez que se haya quitado el Jetbridge

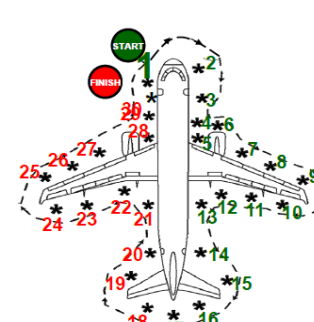

Informe cualquier hallazgo de inmediato. Si se encuentra algún daño, no abra / cierre los compartimentos adyacentes al daño

FOD encontrado durante la caminata

NO caminata realizada. Daños ocurridos en el vuelo no encontrados

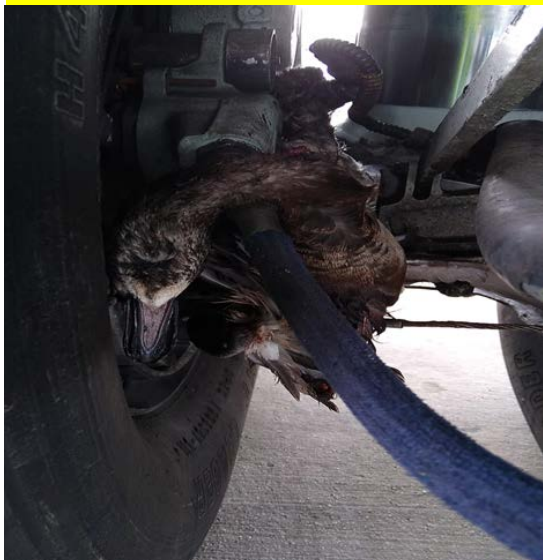

Ave en el tren de aterrizaje principal



Panel perdido de la aeronave durante el vuelo

PREPARED BY:

Safety Department