



LUBRICANT PRODUCTS



CoreLifting.com



Wire Rope Lubricant

Vitalife® products are the preferred wire rope lubricants in the industry because of their ability to penetrate into wire rope and displace water and contaminants, thus reducing wear and corrosion throughout the rope.

- Available in a variety of container sizes.
- Provides inner strand preservation and lubricity.
- Allows for easy visual inspection of the ropes.
- Reduces the friction between the strands of the wire rope, thus extending rope life.
- Adheres to surface of strands, forming an outer film which provides excellent corrosive protection.
- Non-tacky (will not attract dust)
- Vitalife® in aerosol form is a regulated dangerous good. See MSDS sheet for shipping instructions.
- Vitalife® Bio-Lube has been developed especially for environmentally friendly applications.
- Vitalife® 500 has been developed exclusively for ski lifts and tramways.

7

VITALIFE® 400
12 OZ.



**VITALIFE® 410
BIO-LUBE**
12 OZ.



VITALIFE® 400
5 GALLON



VITALIFE® 400
55 GALLON



Vitalife® Type	Container Size	Stock No.	Weight Each (kg)
Vitalife® 400 (Standard)	12 Ounce	1038946	1.00
	5 Gallon	1038955	41.0
	55 Gallon	1038964	420
Vitalife® 410 BIO-LUBE (Environmentally Friendly)	12 Ounce	1039004	1.00
	5 Gallon	1039013	41.0
	55 Gallon	1039022	420
Vitalife® 500 (Ski Lifts and Tramways)	5 Gallon	1038973	41.0
	55 Gallon	1038982	420

**SPRAY
APPLICATORS
BACKPACK
SPRAYER**
4 GALLON



VSP Vitalife® Spray Applicators

- Designed and manufactured to work in the rugged field conditions of the construction industry.
- All applicator seals are specially designed to work with Vitalife® 400 and BIO-LUBE products.

Description	VSP Stock No.	Weight Each (lb)
4 Gallon Backpack Sprayer	1039092	11.8



Lubricants

Sea Lube Wire Rope Lubricant

- Biodegradeable
- Preserves & Penetrates
- Leaves sheen on the water
- 12 oz can 5 gal pail 55 gal drum



Sea Lube 19 Wire Rope Lubricant

- Biodegradeable
- Preserves & Penetrates
- Leaves NO sheen on the water
- 5 gal pail



Sea Grease Biodegradeable Lubricant

- Biodegradeable
- Preserves & Penetrates
- Apply with glove or pressure device
- Ideal for offshore tow lines
- 5 gal pail



VIPER WIRE ROPE LUBRICATORS



Safe, fast, efficient and
environmentally responsible
system for lubricating wire ropes



2000m/h
LUBRICATES UP TO
2000M OF ROPE
PER HOUR



LESS RISK
SAFER THAN
MANUAL
LUBRICATION



LIGHT WEIGHT
EASY TO
INSTALL AND
OPERATE



LIFETIME
IMPROVED LUBRICATION =
INCREASED EQUIPMENT
AND ROPE LIFE

IDEAL FOR INDUSTRIAL APPLICATIONS:

■ MINING ■ OFFSHORE OIL & GAS ■ DEFENCE FORCE
■ SHIPPING ■ MARINE ■ CONSTRUCTION

VIPER WIRE ROPE LUBRICATORS

The Viper® Wire Rope Lubricator system provides fast and effective cleaning and lubrication. Wire ropes from 6mm to 165mm in diameter can be lubricated at speeds up to 2,000 metres per hour.

VIPER SOLUTIONS

The Viper Wire Rope Lubricator system is available in three sizes, Maxi, Mid and Mini. Constructed from high grade cast aluminium with a robust protective coating. The Viper Wire Rope Lubricators are available in a kit supplied in a durable aluminium storage case, with all the components to get you started.

A. Viper Maxi MK 2


Suitable for wire ropes between 50mm to 165mm

B. Viper Mid MK 2

Suitable for wire ropes between 6mm to 67mm

C. Viper Mini MK 3

Suitable for wire ropes between 6mm to 44mm

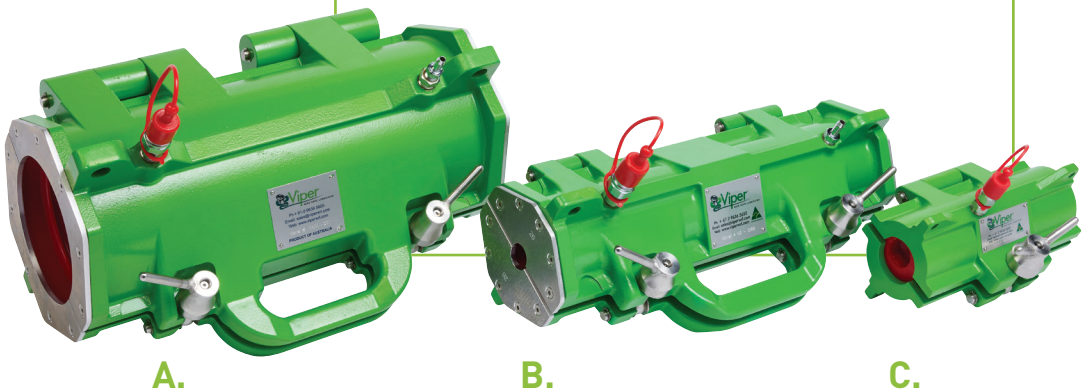

- ✓ Increases the life of wire rope assets by up to 300% compared to manual lubrication
- ✓ Reduces relubrication time of ropes from several days to several hours compared to manual lubrication
- ✓ Safer work environment
- ✓ Environmental benefit with less lubricant used and discarded into the environment

VIPER SCRAPERS

The Viper WRL Scraper plates enable safe entry of broken wires into the seal ensuring the rope and seal is not damaged.




THE VIPER SEAL

WHAT MAKES THE VIPER WRL SEAL SO SPECIAL

The unique Viper seal design is at the heart of the Viper Wire Rope Lubricator system. The polyurethane material is wear resistant to ensure long service life but still flexible enough to mould to the rope. This flexibility eliminates leakage but more importantly enables lubricant to be compressed into the wire rope ensuring total coverage, protecting from corrosion.


Viper seals are proven to have lasted for > 15,000 metres of rope.

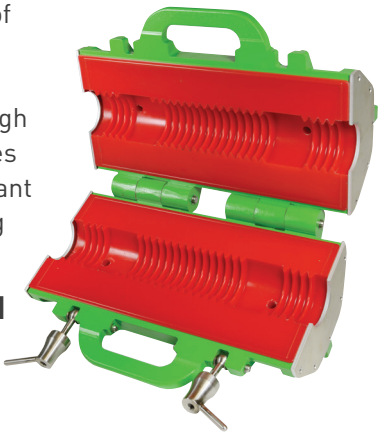

Superior Quality Benefits

Material	■ The polyurethane has high abrasive resistance properties, meaning it is resistant to wear. This enables the seal to be used to lubricate thousands of metres of wire rope without being replaced.
Seal & Rib Design	■ The internal design allows the Viper seal to mould to the rope. This creates a pumping action massaging lubricant into the rope. ■ As the seal moulds to the rope there is constant contact which enables consistent lubrication.
Length of Seal	■ Increased dwell time between the wire rope and seal allows for lubricant to be compressed deep into the wire rope ensuring total coverage, protecting from corrosion.

WIRE ROPE CLEANERS

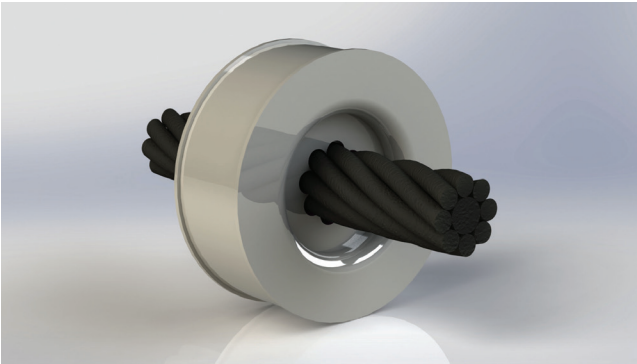

Enabling the removal of contamination or build-up of old lubricant from the wire rope prior to lubrication, improving the effectiveness of the lubrication process. Viper Wire Rope Cleaners (VRC's) are available in left and right hand lay, to suit 6 and 8 strand ropes and other strand configurations available on request.

For certain types of wire ropes where the standard Viper WRC is not suitable, the Viper 'Smooth Bore' rope cleaner is available. The Smooth Bore WRC would be used on hose ropes with many outer strands, some non-rotational ropes, ROV Cables, etc. where the valleys between the strands are minimal and do not readily facilitate a standard Viper WRC.

MANUAL ROPE CLEANERS

To achieve optimum visual inspection of wire rope assets it is critical for old lubricant and contamination to be removed from the outer strands of the rope, prior to inspection and relubrication.



WHY USE THE VIPER MANUAL ROPE CLEANERS

- **Superior Cleaning:** Removes dirt, grime, and contaminants. Providing a clean environment for lubricant penetration.
- **Extended Lifespan:** Regular cleaning extends the life of your wire rope assets saving you time and money.
- **Enhanced Safety:** Clean ropes means safer operations, reducing the risk of accidents.
- **Easy to Use:** Intuitive design requires minimal effort making rope maintenance accessible for everyone.
- **Reduced Downtime:** Improves productivity and equipment availability.
- Designed with two support bushes spaced apart giving the unit stability.

VIPER WIRE ROPE LUBRICATOR APPROVED LUBRICANTS

Recommended Lubricant for use with the Viper Wire Rope Lubricator system.

COATING LUBRICANTS: designed to withstand water washout and protect against corrosion, penetrate, and provide extreme pressure protection.

PENETRATING LUBRICANTS: designed to coat wire rope with a thin lubricant film and penetrate the core.

ECO ROPE GUARDIAN: is certified Environmentally Acceptable Lubricant (EAL), recommended for use in applications on or near waterways.

Type of Lubricant	Recommendations	Typical Application
VPG-0 Penetrating Lubricant	■ Ideal for all dynamic rope applications ■ Offering unparalleled wear resistance ■ High water resistance will not emulsify with water ■ Greatly extends lubrication intervals ■ Proprietary wear reducing additives	■ Wire Ropes ■ Cable Sheaves ■ Crane Wire Ropes ■ Ship loader Hoist Luffing Ropes ■ Mobile Cranes
VCG-1 Coating Lubricant	■ Ideal for high wash applications ■ Will not emulsify with water ■ Will not drip or sling off ■ Proprietary wear additives	■ Crane Wire Ropes ■ Ship loader Hoist Luffing Ropes ■ Anchor Wire ■ Tow Wire ■ Tugboats ■ ROV Cables
ERG Eco Rope Guardian Lubricant	■ Ideal for dynamic wire rope applications ■ VGP compliant Environmentally Acceptable Lubricants ■ Excellent penetration properties ■ Proprietary additives: offering high wear resistance, outstanding water resistance and mechanical stability offering greatly extended lubrication intervals	■ Wire Ropes ■ Cable Sheaves ■ Crane Wire Ropes ■ Ship loader Hoist Luffing Ropes ■ Mobile Cranes

HEALTH SAFETY ENVIRONMENT BENEFITS

The most environmentally responsible method for cleaning and lubricating wire ropes.



Every gram of lubricant is used on the rope with no leakage eliminating waste & environmental impact



No direct contact with the lubricant and avoids risk of accidental spillage



The rope can be lubricated from a safe distance reducing hazardous safety risks

VIPER CUSTOM ENGINEERED SOLUTIONS

Behind the Viper Wire Rope Lubricator system is a professional team providing individual support to understand your needs and delivering a tailored solution which suits your requirements.


Our team ensures we develop a solution to align with your needs and expectations.

At the heart of our custom solution is our commitment to innovation. We are always exploring new technologies and approaches to ensure you have access to cutting-edge solutions to improve safety, efficiencies and productivity.

WORKING WITH OUR TEAM


Our team works with you on the design process

1. Define the problem
2. Research and understand your needs
3. Create conceptual designs for potential solutions
4. Develop and refine the design
5. Test and deliver the custom solution

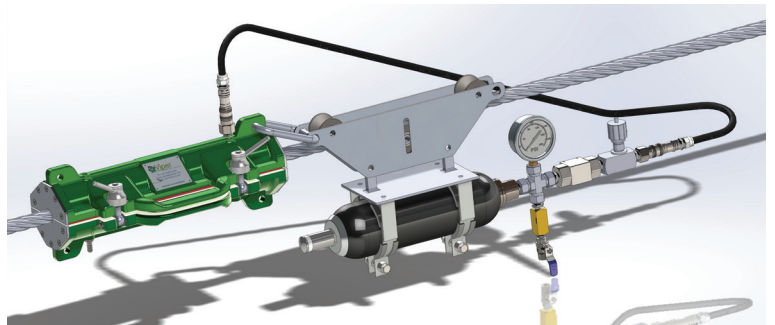

VIPER CUSTOM SOLUTIONS

MULTI-ROPE VIPER WIRE ROPE LUBRICATOR SOLUTIONS



Distributed by:



Global-Mark.com.au®



LEARN MORE



sales@viperwrl.com
Unit 1D/201 Power Street
Glendenning NSW Australia 2761

Phone +61 2 9636 5655
www.viperwrl.com

VIPER MINI MK 3 WIRE ROPE LUBRICATOR



IMPROVED ROPE CAPACITY 6MM TO 44MM

**Safe, fast, efficient
and environmentally
responsible solution for
lubricating wire ropes**

The Viper® Mini MK 3 Wire Rope Lubricator is designed to enable lubricant to migrate into the rope ensuring total coverage of lubricant. The Collar is manufactured from high strength aluminium alloy with a robust coating to maximise corrosion resistance in harsh environments. Designed for wire rope lubrication of mobile cranes, tower cranes, deck winches, construction and service cranes, anchor ropes and small marine cranes.



- ✓ Cleans and lubricates wire ropes fast and efficiently
- ✓ Increases the life of wire rope assets by up to 300%
- ✓ Increases the time between relubrication
- ✓ Provides a safer, cleaner work environment
- ✓ Made in Australia

HOW VIPER® MINI MK 3 INCREASES SITE EFFICIENCIES & REDUCES COST

Compact & Lightweight

- Only 3.5kg making the Viper® Mini MK 3 ideal for single person operation
- Minimises WHS issues whilst working at heights

Cost Effective

- Preventative regulated maintenance increases asset longevity
- Lubricates ropes up to 2000 metres per hour
- Reduces relubrication times from several days to just hours reducing manual labour by up to 90%
- Specially designed seal provides durability in harsh environments whilst ejecting moisture and water maximising corrosion resistance

HEALTH SAFETY ENVIRONMENT BENEFITS

The most environmentally responsible method for cleaning and lubricating wire ropes.

- ✓ Every gram of lubricant is used on the rope with no leakage eliminating waste and environment impact
- ✓ No direct contact with the lubricant and avoids risk of accidental spillage
- ✓ The rope can be lubricated from a safe distance reducing hazardous safety risks
- ✓ At 3.5kg it allows for safe single person application

VIPER MINI MK 3 KIT INCLUSIONS


- VIPER MINI MK 3 COLLAR, HIGH PRESSURE PUMP 50:1; 2,900 GRAMS/MIN
- COMPLETE WITH AIR-REGULATOR AND AIR ISOLATION VALVE TO ENABLE SAFER OPERATION
- GREASE PUMP COMPLETE WITH DRUM COVER, CARRY HANDLE, FOLLOWER PLATE AND 4M HOSE WITH QUICK CONNECTS AT EACH END
- RETAINING RATCHET STRAPS & SHACKLES
- ROBUST CORROSION RESISTANT ALUMINIUM STORAGE CASE



*Note Seals are sold separately

INDUSTRIES

- MARINE
- MINING
- CONSTRUCTION
- SHIPPING
- OIL & GAS
- DEFENCE FORCE

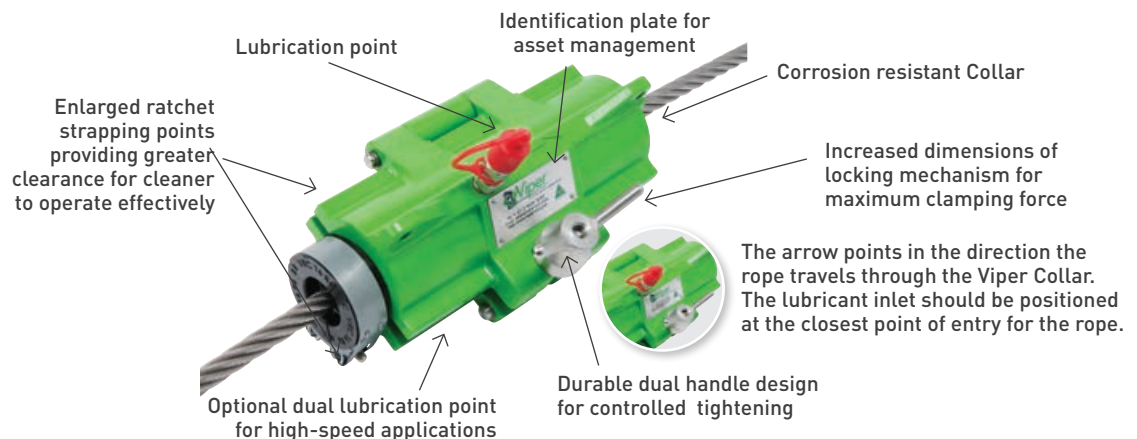

Distributed by:



LEARN MORE



sales@viperwrl.com
Unit 1D/201 Power Street
Glendenning NSW 2761, Australia

Phone +61 2 9636 5655
www.viperwrl.com

VIPER MID MK 2 WIRE ROPE LUBRICATOR



**SUITABLE FOR WIRE ROPES
BETWEEN 6MM TO 67MM**

**Cleans and lubricates
wire ropes quickly,
efficiently and safely.**

Fast and effective lubrication of wire ropes with a diameter between 6mm to 67mm. The Viper Mid MK 2 lubricates ropes at up to 2000m/h. Recommended for use with Wharf Cranes, Ship Cranes, ROV Cables, Mind Winders, Mobile Cranes, Oil & Gas Platforms, Anchor Ropes, Deck Winches, Overhead Cranes and Ship Loaders. The Viper Wire Rope Lubricator provides grease penetration, moisture displacement and total coverage by forcing lubricant into the core of the rope.



- ✓ Increases the life of wire ropes by up to 300% compared to manual lubrication
- ✓ Reduces relubrication time of ropes from several days to several hours compared to manual lubrication
- ✓ Safer work environment
- ✓ Environmental benefit with less lubricant used and discarded

WHY CHOOSE THE VIPER MID MKII WIRE ROPE LUBRICATOR?

In Built Handles	■ Enables ease of mounting unit to wire rope.
4.5kg High Pressure Pump	■ Ensures consistent lubricant delivery across a wide range of ambient temperatures ■ Less downtime – Due to the high volume flow rate of the pump, meaning high speed lubrication up to 2000m/h.
Superior Seal Design	■ The Viper Seal is made from polyurethane with high abrasion resistance properties, meaning it is resistant to wear. This enables the seal to be used to lubricant thousands of meters of rope without being replaced. ■ Excess lubrication is captured via a second seal chamber meaning low environmental impact as the lubricant is contained. ■ The material and internal design of the seal allows for the seal to mould to the shape of the rope. This creates a pumping action massaging lubricant into the rope. ■ The seal moulds to the rope which means there is constant contact with the wire rope which enables consistent lubrication.
Metal Alloy Scraper Plate	■ Enables safe entry of broken wire ropes ensuring the rope and seal is not damaged.
Suits a Wide Range of Rope Diameters – 6mm to 67mm	■ Enables lubrication of a broad range of rope diameters with one Viper Kit.

HEALTH SAFETY ENVIRONMENT BENEFITS

The Viper WRL was developed with safety and the environment in mind. When used correctly the Viper WRL has several Health, Safety and Environment benefits.

- ✓ Every gram of grease goes on the rope
- ✓ Does not leak meaning no mess
- ✓ No wasted lubricant
- ✓ Light weight allows for safe application
- ✓ There is no direct contact with the lubricant
- ✓ The rope can be lubricated from a safe distance

VIPER MID KIT INCLUSIONS

The Viper Wire Rope Lubricator is supplied as a complete package, with all of the components required to get you started. Simply order the kit and then select and order the seals and scrapers to suit the rope size to be lubricated.

■ VIPER MID MK 2 HIGH STRENGTH, CAST ALUMINIUM COLLAR

The MK 2 Collar is constructed from high strength Aluminium Alloy, precision machined to tight specifications. The collar is completed with stainless steel hardware to provide maximum durability and corrosion protection. The unit is designed for ease of use having handles located on each half of the collar.

■ HIGH VOLUME GREASE PUMP

The Viper Mid MK 2 kit includes a lubricant pump, built specifically for the Viper WRL. The unit delivers 4.5kg/min.

■ AIR REGULATOR/MOISTURE TRAP WITH GAUGE AND ISOLATION VALVE

■ 4M HIGH PRESSURE 1/2" LUBE DELIVERY HOSE

■ HIGH PRESSURE LUBRICANT METERING VALVE

■ CLEAR LUBE DRAIN HOSE

■ RETAINING RATCHET STRAPS AND SHACKLES

■ ROBUST ALUMINIUM STORAGE CASE

■ CONVENIENT CARRY STRAP FOR COLLAR



APPLICATIONS

■ WHARF CRANES

■ SHIP CRANES

■ ROV CABLES

■ MINE WINDERS

■ MOBILE CRANES

■ OIL & GAS PLATFORMS

■ ANCHOR ROPES

■ DECK WINCHES

■ OVERHEAD CRANES

■ SHIP LOADERS

Distributed by:



SCAN ME

sales@viperwrl.com
Unit 1D/201 Power Street
Glendenning NSW 2761, Australia

Phone +61 2 9636 5655
www.viperwrl.com

VIPER MAXI MK 2 WIRE ROPE LUBRICATOR



**SUITABLE FOR WIRE ROPES
BETWEEN 50MM TO 165MM**

**Cleans and lubricates
wire ropes quickly,
efficiently and safely.**

Fast and effective lubrication of wire ropes with a diameter between 50mm to 165mm. The Viper WRL Maxi MK 2 lubricates ropes at up to 2000m/h. Recommended for use with ROV Cables, Vessel Crane Ropes, Underwater Offshore Wire Ropes and Drag Lines. The Viper Wire Rope Lubricator provides grease penetration, moisture displacement and total coverage by forcing lubricant into the core of the rope.



- ✓ Increases the life of wire ropes by up to 300% compared to manual lubrication
- ✓ Reduces relubrication time of ropes from several days to several hours compared to manual lubrication
- ✓ Safer work environment
- ✓ Environmental benefit with less lubricant used and discarded

WHY CHOOSE THE VIPER MAXI MKII WIRE ROPE LUBRICATOR?

In Built Handles	■ Enables ease of mounting unit to wire rope.
4.5kg High Pressure Pump	■ Ensures consistent lubricant delivery across a wide range of ambient temperatures ■ Less downtime – Due to the high volume flow rate of the pump, meaning high speed lubrication up to 2000m/h.
Option for 13kg high pressure, high flow pump	■ High speed lubrication of ropes allows quicker lubrication, hence less downtime ■ Enables larger diameter and longer ropes to be lubricated.
Superior Seal Design	■ Excess lubrication is captured via a second seal chamber meaning low environmental impact as lubricant is contained. ■ Seal length enables longer dwell time for better lubricant penetration for larger diameter ropes.
Metal Alloy Scraper Plate	■ Enables safe entry of broken wire ropes into the seal ensuring the rope and seal is not damaged.
Suitable for a wide range of wire ropes – Diameters 50mm to 165mm	■ Enables lubrication of a broad range of rope diameters with one Viper Kit.

HEALTH SAFETY ENVIRONMENT BENEFITS

The Viper WRL was developed with safety and the environment in mind. When used correctly the Viper WRL has several Health, Safety and Environment benefits.

- ✓ Every gram of grease goes on the rope
- ✓ Does not leak meaning no mess
- ✓ No wasted lubricant
- ✓ Light weight allows for safe application
- ✓ There is no direct contact with the lubricant
- ✓ The rope can be lubricated from a safe distance

VIPER MAXI KIT INCLUSIONS

The Viper Wire Rope Lubricator is supplied as a complete package, with all of the components required to get you started. Simply order the kit and then select and order the seals and scrapers to suit the rope size to be lubricated.

■ VIPER MAXI MK 2 HIGH STRENGTH, CAST ALUMINIUM COLLAR

The Maxi MK 2 Collar is constructed from high strength Aluminium Alloy, precision machined to tight specifications. The Collar is completed with stainless steel hardware to provide maximum durability and corrosion protection. The new Maxi MK 2 can lubricate ropes up to 165mm (6-1/2"). The unit is designed for ease of use having handles located on each half of the collar.

■ CHOICE OF TWO PUMPS 4.5KG/MIN OUTPUT & 13KG/MIN OUTPUT IN 190KG DRUM SIZE

Two pump options are available. The standard unit delivers 4.5kg/min, while the optional high volume unit delivers 13kg/min for fast lubrication of large diameter ropes, for further reduced down time. Both pumps are supplied in 190kg drum size. Viper recommends the use of the high flow pump for ropes larger than 85mm.

■ TWIN LUBRICANT INLETS

The Maxi Viper collar comes complete with twin lubricant inlets that provide maximum lubricant coverage for large wire ropes, this coupled with the high volume grease pumps ensures effective lubrication occurs.

■ AIR REGULATOR/MOISTURE TRAP WITH GAUGE AND ISOLATION VALVE



■ 10M HIGH PRESSURE SUPPLY HOSE FITTED WITH COUPLING BOTH ENDS

■ CLEAR LUBE DRAIN HOSE

■ 1200KG RATED RATCHET RETAINING STRAPS & BOW SHACKLES

■ HEAVY DUTY FULLY WELDED ALUMINIUM STORAGE CASE

APPLICATIONS

- ROV CABLES
- VESSEL CRANE ROPES
- UNDERWATER OFFSHORE WIRE ROPES
- DRAG LINES

Distributed by:



SCAN ME

sales@viperwrl.com
Unit 1D/201 Power Street
Glendenning NSW 2761, Australia

Phone +61 2 9636 5655
www.viperwrl.com

VIPER WRL


MINI MK 3 - MID MK 2 - MAXI MK 2

SEAL - SCRAPER - VRC - SELECTION GUIDE



SEAL SELECTION

Viper seals are designed to have some interference with the rope, depending on its size and type, with an interference of up to 3mm allowable for standard 6 & 8 strand ropes. For compact, non-rotating or wireline type ropes which do not have valleys, a maximum interference of 1mm is recommended as these ropes do not allow for the same amount of seal deflection within the collar.

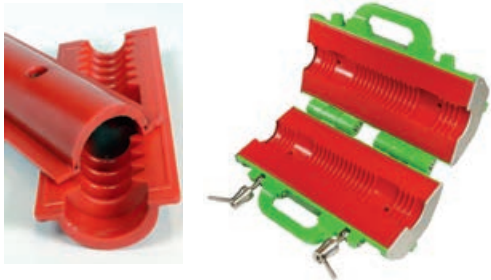

SCRAPER SELECTION

Viper recommend that wire ropes be physically measured prior to ordering seals and scrapers as ropes in service may vary in size. Scrapers are supplied slightly larger than the actual wire rope size to allow for rope flexing.



ROPE CLEANER (VRC) SELECTION

Viper Rope Cleaners* enable the removal of contamination or built up old lubricant from the wire rope prior to lubrication, improving the effectiveness of the lubrication process via the Viper WRL.

For certain types of wire ropes where the standard Viper Rope Cleaner is not suitable, the Viper 'Smooth Bore' rope cleaner is available. The Smooth Bore Rope Cleaner would typically be used on those ropes with a large number of outer strands, some non-rotational ropes, ROV cables, etc, where the valleys between the strands are minimal and do not readily facilitate a standard Viper Rope Cleaner.


*VRC available as a single unit or pack of 5



IMPORTANT - BEFORE YOU ORDER

1. PHYSICALLY MEASURE ROPES

It is critical that all ropes be physically measured prior to selecting and ordering the VRC, as ropes size may vary in service.

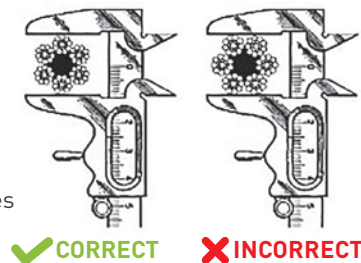

2. DETERMINE LAY OF ROPES



Right Lay
Clockwise Rotation



Left Lay
Counter Clockwise
Rotation


3. DETERMINE THE STRAND TYPE



6 Strand



8 Strand



Armoured or
Multi Strand

The following tables allow for the quick and easy selection of the correct VRC to suit your specific requirements.



SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655

MINI MK 3

SEAL - VRC - SELECTION GUIDE




VIPER MINI MK 3

Actual Rope Size	Viper Seals for 6 & 8 Strand Ropes Only	Viper Seals for Armoured & Multi Strand Ropes Only	Viper Smooth Bore Rope Cleaner	Viper Rope Cleaner 6 Strand Ropes*		Viper Rope Cleaner 8 Strand Ropes*	
	Seal Part No.	Seal Part No.		Right Lay	Left Lay	Right Lay	Left Lay
6mm to 7mm 15/64" to 9/32"	VMI3SEAL6	VMI3SEAL6	N/A	N/A	N/A	N/A	N/A
8mm to 9mm 5/16" to 23/64"	VMI3SEAL8	VMI3SEAL8	VRC-SB8	N/A	N/A	N/A	N/A
9mm to 10mm 23/64" to 25/64"	VMI3SEAL8	VMI3SEAL10	VRC-SB9	N/A	N/A	N/A	N/A
11mm to 12mm 7/16" to 15/32"	VMI3SEAL10	VMI3SEAL12	VRC-SB11	N/A	N/A	N/A	N/A
13mm to 14mm 33/64" to 35/64"	VMI3SEAL13	VMI3SEAL14	VRC-SB13	N/A	N/A	N/A	N/A
15mm to 16mm 19/32" to 5/8"	VMI3SEAL14	VMI3SEAL16	VRC-SB15	VRC16-6R	VRC16-6L	VRC16-8R	VRC16-8L
17mm to 18mm 43/64" to 45/64"	VMI3SEAL16	VMI3SEAL18	VRC-SB17	VRC18-6R	VRC18-6L	VRC18-8R	VRC18-8L
19mm to 20mm 3/4" to 25/32"	VMI3SEAL18	VMI3SEAL20	VRC-SB19	VRC20-6R	VRC20-6L	VRC20-8R	VRC20-8L
21mm to 22mm 53/64" to 55/64"	VMI3SEAL20	VMI3SEAL22	VRC-SB21	VRC22-6R	VRC22-6L	VRC22-8R	VRC22-8L
23mm to 24mm 29/32" to 15/16"	VMI3SEAL22	VMI3SEAL24	VRC-SB23	VRC24-6R	VRC24-6L	VRC24-8R	VRC24-8L
25mm to 26mm 63/64" to 1-1/32"	VMI3SEAL24	VMI3SEAL26	VRC-SB25	VRC26-6R	VRC26-6L	VRC26-8R	VRC26-8L
27mm to 28mm 1-1/16" to 1-7/64"	VMI3SEAL26	VMI3SEAL28	VRC-SB27	VRC28-6R	VRC28-6L	VRC28-8R	VRC28-8L
29mm to 30mm 1-9/64" to 1-3/16"	VMI3SEAL28	VMI3SEAL30	VRC-SB29	VRC30-6R	VRC30-6L	VRC30-8R	VRC30-8L
31mm to 33mm 1-7/32" to 1-19/64"	VMI3SEAL30	VMI3SEAL32	VRC-SB31	VRC32-6R	VRC32-6L	VRC32-8R	VRC32-8L
33mm to 34mm 1-19/64" to 1-11/32"	VMI3SEAL32	VMI3SEAL33	VRC-SB33	VRC34-6R	VRC34-6L	VRC34-8R	VRC34-8L
35mm to 36mm 1-3/8" to 1-27/64"	VMI3SEAL33	VMI3SEAL35	VRC-SB34	VRC36-6R	VRC36-6L	VRC36-8R	VRC36-8L
37mm to 38mm 1-29/64" to 1-1/2"	VMI3SEAL35	VMI3SEAL38	VRC-SB37	VRC38-6R	VRC38-6L	VRC38-8R	VRC38-8L
39mm-40mm 1-17/32" to 1-37/64"	VMI3SEAL38	VMI3SEAL40	VRC-SB39	VRC40-6R	VRC40-6L	VRC40-8R	VRC40-8L
41mm to 42mm 1-39/64" to 1-21/32"	VMI3SEAL40	VMI3SEAL42	VRC-SB41	VRC42-6R	VRC42-6L	VRC42-8R	VRC42-8L
43mm to 44mm 1-11/16" to 1-47/64"	VMI3SEAL42	VMI3SEAL44	VRC-SB43	VRC44-6R	VRC44-6L	VRC44-8R	VRC44-8L

IMPORTANT
CHOOSE CORRECT
ROPE TYPE
PRIOR TO ORDERING



6 or 8 Strand
Ropes Only



Armoured or
Multi Strand
Ropes Only

* VRC available as a single unit or pack of 5. For 5 pack part number add 'Pack' to the end of the single part number. Eg VRC24-6R-Pack



SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655


REV E 01.2025

MID MK 2

SEAL - SCRAPER - VRC - SELECTION GUIDE



VIPER MID MK 2

Actual Rope Size	 6 or 8 Strand Ropes Only		 Armoured or Multi Strand Ropes Only		Viper Smooth Bore Rope Cleaner	Viper Rope Cleaner 6 Strand Ropes*		Viper Rope Cleaner 8 Strand Ropes*	
	Seal Part No.	Scraper No.	Seal Part No.	Scraper No.		Right Lay	Left Lay	Right Lay	Left Lay
6mm to 7mm 15/64" to 9/32"	VSEAL6	VSC8	VSEAL6	VSC8	N/A	N/A	N/A	N/A	N/A
8mm to 9mm 5/16" to 23/64"	VSEAL8	VSC10	VSEAL8	VSC10	VRC-SB9	N/A	N/A	N/A	N/A
9mm to 10mm 23/64" to 25/64"	VSEAL8	VSC10	VSEAL10	VSC10	VRC-SB9	N/A	N/A	N/A	N/A
11mm to 12mm 7/16" to 15/32"	VSEAL10	VSC12	VSEAL12	VSC12	VRC-SB11	N/A	N/A	N/A	N/A
13mm to 14mm 33/64" to 35/64"	VSEAL13	VSC14	VSEAL14	VSC14	VRC-SB13	N/A	N/A	N/A	N/A
15mm to 16mm 19/32" to 5/8"	VSEAL14	VSC16	VSEAL16	VSC16	VRC-SB15	VRC16-6R	VRC16-6L	VRC16-8R	VRC16-8L
17mm to 18mm 43/64" to 45/64"	VSEAL16	VSC18	VSEAL18	VSC18	VRC-SB17	VRC18-6R	VRC18-6L	VRC18-8R	VRC18-8L
19mm to 20mm 3/4" to 25/32"	VSEAL18	VSC20	VSEAL20	VSC20	VRC-SB19	VRC20-6R	VRC20-6L	VRC20-8R	VRC20-8L
21mm to 22mm 53/64" to 55/64"	VSEAL20	VSC22	VSEAL22	VSC22	VRC-SB21	VRC22-6R	VRC22-6L	VRC22-8R	VRC22-8L
23mm to 24mm 29/32" to 15/16"	VSEAL22	VSC24	VSEAL24	VSC24	VRC-SB23	VRC24-6R	VRC24-6L	VRC24-8R	VRC24-8L
25mm to 26mm 63/64" to 1-1/32"	VSEAL24	VSC26	VSEAL26	VSC26	VRC-SB25	VRC26-6R	VRC26-6L	VRC26-8R	VRC26-8L
27mm to 28mm 1-1/16" to 1-7/64"	VSEAL26	VSC28	VSEAL28	VSC28	VRC-SB27	VRC28-6R	VRC28-6L	VRC28-8R	VRC28-8L
29mm to 30mm 1-9/64" to 1-3/16"	VSEAL28	VSC30	VSEAL30	VSC30	VRC-SB29	VRC30-6R	VRC30-6L	VRC30-8R	VRC30-8L
31mm to 32mm 1-7/32" to 1-17/64"	VSEAL30	VSC32	VSEAL32	VSC32	VRC-SB30	VRC32-6R	VRC32-6L	VRC32-8R	VRC32-8L
33mm to 34mm 1-19/64" to 1-11/32"	VSEAL32	VSC34	VSEAL33	VSC34	VRC-SB33	VRC34-6R	VRC34-6L	VRC34-8R	VRC34-8L
35mm to 36mm 1-3/8" to 1-27/64"	VSEAL33	VSC36	VSEAL35	VSC36	VRC-SB34	VRC36-6R	VRC36-6L	VRC36-8R	VRC36-8L
37mm to 38mm 1-29/64" to 1-1/2"	VSEAL35	VSC38	VSEAL38	VSC38	VRC-SB37	VRC38-6R	VRC38-6L	VRC38-8R	VRC38-8L
39mm-40mm 1-17/32" to 1-37/64"	VSEAL38	VSC40	VSEAL40	VSC40	VRC-SB39	VRC40-6R	VRC40-6L	VRC40-8R	VRC40-8L
41mm to 42mm 1-39/64" to 1-21/32"	VSEAL40	VSC42	VSEAL42	VSC42	VRC-SB41	VRC42-6R	VRC42-6L	VRC42-8R	VRC42-8L
43mm to 44mm 1-11/16" to 1-47/64"	VSEAL42	VSC44	VSEAL44	VSC44	VRC-SB43	VRC44-6R	VRC44-6L	VRC44-8R	VRC44-8L

Continued on next page

* VRC available as a single unit or pack of 5. For 5 pack part number add 'Pack' to the end of the single part number. Eg VRC24-6R-Pack

SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655

REV E 01.2025

MID MK 2 CONT.

SEAL - SCRAPER - VRC - SELECTION GUIDE




VIPER MID MK 2

**IMPORTANT
CHOOSE CORRECT
ROPE TYPE
PRIOR TO ORDERING**



**6 or 8 Strand
Ropes Only**



**Armoured or
Multi Strand
Ropes Only**

Actual Rope Size	Viper Seals/Scrapers for 6 & 8 Strand Ropes Only		Viper Seals/Scraper for Amoured & Multi Strand Ropes Only		Viper Smooth Bore Rope Cleaner	Viper Rope Cleaner 6 Strand Ropes*		Viper Rope Cleaner 8 Strand Ropes*	
	Seal Part No.	Scraper No.	Seal Part No.	Scraper No.		Right Lay	Left Lay	Right Lay	Left Lay
45mm to 46mm 1-49/64" to 1-13/16"	VSEAL44	VSC46	VSEAL46	VSC46	VRC-SB45	VRC46-6R	VRC46-6L	VRC46-8R	VRC46-8L
47mm to 48mm 1-27/32" to 1-57/64"	VSEAL46	VSC48	VSEAL48	VSC48	VRC-SB47	VRC48-6R	VRC48-6L	VRC48-8R	VRC48-8L
49mm to 50mm 1-59/64" to 1-31/32"	VSEAL48	VSC50	VSEAL50	VSC50	VRC-SB49	VRC50-6R	VRC50-6L	VRC50-8R	VRC50-8L
51mm to 52mm 2-1/64" to 2-3/64"	VSEAL50	VSC52	VSEAL52	VSC52	VRC-SB51	VRC52-6R	VRC52-6L	VRC52-8R	VRC52-8L
53mm to 54mm 2-3/32 to 2-1/8"	VSEAL52	VSC54	VSEAL54	VSC54	VRC-SB53	VRC54-6R	VRC54-6L	VRC54-8R	VRC54-8L
55mm to 56mm 2-11/64 to 2-13/64"	VSEAL54	VSC56	VSEAL55	VSC56	VRC-SB54	VMRC56-6R	VMRC56-6L	VMRC56-8R	VMRC56-8L
57mm to 58mm 2-1/4" to 2-9/32"	VSEAL55	VSC58	VSEAL55	VSC58	VMRC-SB57	VMRC58-6R	VMRC58-6L	VMRC58-8R	VMRC58-8L
59mm to 60mm 2-21/64" to 2-23/64"	VSEAL58	VSC60	VSEAL58	VSC60	VMRC-SB59	VMRC60-6R	VMRC60-6L	VMRC60-8R	VMRC60-8L
61mm to 62mm 2-13/32" to 2-7/16"	VSEAL60	VSC62	VSEAL60	VSC62	VMRC-SB62	VMRC62-6R	VMRC62-6L	VMRC62-8R	VMRC62-8L
63mm to 64mm 2-31/64" to 2-33/64"	VSEAL62	VSC64	VSEAL63	VSC64	VMRC-SB64	VMRC64-6R	VMRC64-6L	VMRC64-8R	VMRC64-8L
65mm to 66mm 2-9/16" to 2-19/32"	VSEAL63	VSC66	VSEAL65	VSC66	VMRC-SB64	VMRC66-6R	VMRC66-6L	VMRC66-8R	VMRC66-8L
66mm to 67mm 2-19/32" to 2-41/64"	VSEAL65	VSC68	VSEAL65	VSC68	VMRC-SB66	VMRC66-6R	VMRC66-6L	VMRC66-8R	VMRC66-8L

* VRC available as a single unit or pack of 5. For 5 pack part number add 'Pack' to the end of the single part number. Eg VRC24-6R-Pack



SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655

MAXI MK 2

SEAL - SCRAPER - VRC - SELECTION GUIDE




VIPER MAXI MK 2

**IMPORTANT
CHOOSE CORRECT
ROPE TYPE
PRIOR TO ORDERING**



**6 or 8 Strand
Ropes Only**



**Armoured or
Multi Strand
Ropes Only**

Multi-Strand Rope Cleaners
for ropes over 65mm are available on request,
eg: 18/21 Strand Ropes
minimum order quantities may be applicable

Actual Rope Size	Viper Seals/Scrapers for 6 & 8 Strand Ropes Only		Viper Seals/Scraper for Amoured & Multi Strand Ropes Only		Viper Smooth Bore Rope Cleaner	Viper Rope Cleaner 6 Strand Ropes*		Viper Rope Cleaner 8 Strand Ropes*	
	Seal Part No.	Scraper No.	Seal Part No.	Scraper No.		Right Lay	Left Lay	Right Lay	Left Lay
49mm to 50mm 1-59/64" to 1-31/32"	VMMSEAL48	VMMSC50	VMMSEAL50	VMMSC50	VRC-SB49	VRC50-6R	VRC50-6L	VRC50-8R	VRC50-8L
51mm to 52mm 2-1/64" to 2-3/64"	VMMSEAL50	VMMSC52	VMMSEAL52	VMMSC52	VRC-SB51	VRC52-6R	VRC52-6L	VRC52-8R	VRC52-8L
53mm to 54mm 2-3/32 to 2-1/8"	VMMSEAL52	VMMSC54	VMMSEAL54	VMMSC54	VRC-SB53	VRC54-6R	VRC54-6L	VRC54-8R	VRC54-8L
55mm to 56mm 2-11/64 to 2-13/64"	VMMSEAL54	VMMSC56	VMMSEAL55	VMMSC56	VMRC-SB55	VMRC56-6R	VMRC56-6L	VMRC56-8R	VMRC56-8L
57mm to 58mm 2-1/4" to 2-9/32"	VMMSEAL55	VMMSC58	VMMSEAL55	VMMSC58	VMRC-SB57	VMRC58-6R	VMRC58-6L	VMRC58-8R	VMRC58-8L
59mm to 60mm 2-21/64" to 2-23/64"	VMMSEAL58	VMMSC60	VMMSEAL58	VMMSC60	VMRC-SB59	VMRC60-6R	VMRC60-6L	VMRC60-8R	VMRC60-8L
61mm to 62mm 2-13/32" to 2-7/16"	VMMSEAL60	VMMSC62	VMMSEAL60	VMMSC62	VMRC-SB62	VMRC62-6R	VMRC62-6L	VMRC62-8R	VMRC62-8L
63mm to 64mm 2-31/64" to 2-33/64"	VMMSEAL62	VMMSC64	VMMSEAL63	VMMSC64	VMRC-SB64	VMRC64-6R	VMRC64-6L	VMRC64-8R	VMRC64-8L
65mm to 66mm 2-9/16" to 2-19/32	VMMSEAL63	VMMSC66	VMMSEAL65	VMMSC66	VMRC-SB64	VMRC66-6R	VMRC66-6L	VMRC66-8R	VMRC66-8L
66mm to 67mm 2-19/32" to 2-41/64"	VMMSEAL65	VMMSC68	VMMSEAL65	VMMSC68	VMRC-SB66	VMRC66-6R	VMRC66-6L	VMRC66-8R	VMRC66-8L
68mm to 70mm 2-43/64" to 2-3/4"	VMMSEAL68	VMMSC70	VMMSEAL68	VMMSC70	VMRC-SB69	VMRC70-6R	VMRC70-6L	VMRC70-8R	VMRC70-8L
71mm to 73mm 2-51/64" to 2-7/8"	VMMSEAL70	VMMSC72	VMMSEAL70	VMMSC72	VMRC-SB72	VMRC72-6R	VMRC72-6L	VMRC72-8R	VMRC72-8L
74mm to 75mm 2-29/32" to 2-61/64"	VMMSEAL74	VMMSC76	VMMSEAL74	VMMSC76	VMRC-SB74	VMRC74-6R	VMRC74-6L	VMRC74-8R	VMRC74-8L
76mm to 77mm 2-63/64" to 3-1/32"	VMMSEAL74	VMMSC78	VMMSEAL76	VMMSC78	VMRC-SB76	VMRC76-6R	VMRC76-6L	VMRC76-8R	VMRC76-8L
78mm to 79mm 3-5/64" to 3-7/64"	VMMSEAL76	VMMSC80	VMMSEAL78	VMMSC80	VMRC-SB78	VMRC78-6R	VMRC78-6L	VMRC78-8R	VMRC78-8L
80mm to 82mm 3-5/32" to 3-15/64"	VMMSEAL80	VMMSC82	VMMSEAL80	VMMSC82	VMRC-SB80	VMRC82-6R	VMRC82-6L	VMRC82-8R	VMRC82-8L

Continued on next page

* VRC available as a single unit or pack of 5. For 5 pack part number add 'Pack' to the end of the single part number. Eg VRC24-6R-Pack

SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655

REV E 01.2025

MAXI MK 2 CONT.

SEAL - SCRAPER - VRC - SELECTION GUIDE




VIPER MAXI MK 2

**IMPORTANT
CHOOSE CORRECT
ROPE TYPE
PRIOR TO ORDERING**



**6 or 8 Strand
Ropes Only**



**Armoured or
Multi Strand
Ropes Only**

Multi-Strand Rope Cleaners
for ropes over 65mm are available on request,
eg: 18/21 Strand Ropes
minimum order quantities may be applicable

Actual Rope Size	Viper Seals/Scrapers for 6 & 8 Strand Ropes Only		Viper Seals/Scraper for Amoured & Multi Strand Ropes Only		Viper Smooth Bore Rope Cleaner	Viper Rope Cleaner 6 Strand Ropes*		Viper Rope Cleaner 8 Strand Ropes*	
	Seal Part No.	Scraper No.	Seal Part No.	Scraper No.		Right Lay	Left Lay	Right Lay	Left Lay
83mm to 85mm 3-17/64" to 3-11/32"	VMMSEAL83	VMMSC84	VMMSEAL83	VMMSC84	VMRC-SB84	VMRC84-6R	VMRC84-6L	VMRC84-8R	VMRC84-8L
86mm to 88mm 3-25/64" to 3-15/32"	VMMSEAL86	VMMSC88	VMMSEAL86	VMMSC88	VMRC-SB87	VMRC88-6R	VMRC88-6L	VMRC88-8R	VMRC88-8L
89mm to 91mm 3-1/2" to 3-37/64"	VMMSEAL88	VMMSC90	VMMSEAL88	VMMSC90	VMRC-SB90	VMRC90-6R	VMRC90-6L	VMRC90-8R	VMRC90-8L
92mm to 93mm 3-5/8" to 3-21/32"	VMMSEAL90	VMMSC92	VMMSEAL90	VMMSC92	VMRC-SB93	VMRC92-6R	VMRC92-6L	VMRC92-8R	VMRC92-8L
94mm to 95mm 3-45/64" to 3-47/64"	VMMSEAL92	VMMSC94	VMMSEAL92	VMMSC94	VMRC-SB95	VMRC94-6R	VMRC94-6L	VMRC94-8R	VMRC94-8L
96mm to 97mm 3-25/32" to 3-13/16"	VMMSEAL96	VMMSC98	VMMSEAL96	VMMSC98	VMRC-SB96	VMRC96-6R	VMRC96-6L	VMRC96-8R	VMRC96-8L
98mm to 99mm 3-55/64" to 3-57/64"	VMMSEAL96	VMMSC100	VMMSEAL98	VMMSC100	VMRC-SB98	VMRC98-6R	VMRC98-6L	VMRC98-8R	VMRC98-8L
100mm to 102mm 3-15/16" to 4-1/64"	VMMSEAL98	VMMSC102	VMMSEAL100	VMMSC102	VMRC-SB101	VMRC102-6R	VMRC102-6L	VMRC102-8R	VMRC102-8L
103mm to 105mm 4-1/16" to 4-9/64"	VMMSEAL103	VMMSC106	VMMSEAL103	VMMSC106	VMMRC-SB104	VMMRC104-6R	VMMRC104-6L	VMMRC104-8R	VMMRC104-8L
106mm to 108mm 4-11/64" to 4-1/4"	VMMSEAL106	VMMSC108	VMMSEAL106	VMMSC108	VMMRC-SB107	VMMRC108-6R	VMMRC108-6L	VMMRC108-8R	VMMRC108-8L
109mm to 111mm 4-19/64" to 4-3/8"	VMMSEAL109	VMMSC112	VMMSEAL109	VMMSC112	VMMRC-SB110	VMMRC110-6R	VMMRC110-6L	VMMRC110-8R	VMMRC110-8L
112mm to 114mm 4-13/32" to 4-31/64"	VMMSEAL112	VMMSC114	VMMSEAL112	VMMSC114	VMMRC-SB113	VMMRC112-6R	VMMRC112-6L	VMMRC112-8R	VMMRC112-8L
115mm to 116mm 4-17/32" to 4-9/16"	VMMSEAL115	VMMSC116	VMMSEAL115	VMMSC116	VMMRC-SB115	VMMRC116-6R	VMMRC116-6L	VMMRC116-8R	VMMRC116-8L
117mm to 119mm 4-39/64" to 4-11/16"	VMMSEAL117	VMMSC120	VMMSEAL117	VMMSC120	VMMRC-SB118	VMMRC118-6R	VMMRC118-6L	VMMRC118-8R	VMMRC118-8L

Continued on next page

* VRC available as a single unit or pack of 5. For 5 pack part number add 'Pack' to the end of the single part number. Eg VRC24-6R-Pack

SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655


REV E 01.2025

MAXI MK 2 CONT.

SEAL - SCRAPER - VRC - SELECTION GUIDE



VIPER MAXI MK 2

Actual Rope Size	 6 or 8 Strand Ropes Only		 Armoured or Multi Strand Ropes Only		Multi-Strand Rope Cleaners for ropes over 65mm are available on request, eg: 18/21 Strand Ropes minimum order quantities may be applicable				
	Viper Seals/Scrapers for 6 & 8 Strand Ropes Only		Viper Seals/Scraper for Amoured & Multi Strand Ropes Only		Viper Smooth Bore Rope Cleaner	Viper Rope Cleaner 6 Strand Ropes*		Viper Rope Cleaner 8 Strand Ropes*	
	Seal Part No.	Scraper No.	Seal Part No.	Scraper No.		Right Lay	Left Lay	Right Lay	Left Lay
120mm to 122mm 4-23/32" to 4-51/64"	VMMSEAL120	VMMSC122	VMMSEAL120	VMMSC122	VMMRC-SB121	VMMRC122-6R	VMMRC122-6L	VMMRC122-8R	VMMRC122-8L
123mm to 125mm 4-27/32" to 4-59/64"	VMMSEAL123	VMMSC126	VMMSEAL123	VMMSC126	VMMRC-SB124	VMMRC124-6R	VMMRC124-6L	VMMRC124-8R	VMMRC124-8L
126mm to 128mm 4-61/64" to 5-3/64"	VMMSEAL126	VMMSC128	VMMSEAL126	VMMSC128	VMMRC-SB127	VMMRC128-6R	VMMRC128-6L	VMMRC128-8R	VMMRC128-8L
129mm to 131mm 5-5/64" to 5-5/32"	VMMSEAL129	VMMSC132	VMMSEAL129	VMMSC132	VMMRC-SB130	VMMRC130-6R	VMMRC130-6L	VMMRC130-8R	VMMRC130-8L
132mm to 134mm 5-13/64" to 5-9/32"	VMMSEAL132	VMMSC134	VMMSEAL132	VMMSC134	VMMRC-SB133	VMMRC134-6R	VMMRC134-6L	VMMRC134-8R	VMMRC134-8L
135mm to 137mm 5-5/16" to 5-25/64"	VMMSEAL135	VMMSC138	VMMSEAL135	VMMSC138	VMMRC-SB136	VMMRC136-6R	VMMRC136-6L	VMMRC136-8R	VMMRC136-8L
138mm to 140mm 5-7/16" to 5-33/64"	VMMSEAL138	VMMSC140	VMMSEAL138	VMMSC140	VMMRC-SB139	VMMRC140-6R	VMMRC140-6L	VMMRC140-8R	VMMRC140-8L
141mm to 143mm 5-35/64" to 5-5/8"	VMMSEAL141	VMMSC144	VMMSEAL141	VMMSC144	VMMRC-SB142	VMMRC142-6R	VMMRC142-6L	VMMRC142-8R	VMMRC142-8L
144mm to 146mm 5-43/64" to 5-3/4"	VMMSEAL144	VMMSC146	VMMSEAL144	VMMSC146	VMMRC-SB145	VMMRC146-6R	VMMRC146-6L	VMMRC146-8R	VMMRC146-8L
147mm to 149mm 5-25/32" to 5-55/64"	VMMSEAL147	VMMSC150	VMMSEAL147	VMMSC150	VMMRC-SB148	VMMRC148-6R	VMMRC148-6L	VMMRC148-8R	VMMRC148-8L
150mm to 152mm 5-29/32" to 5-63/64"	VMMSEAL150	VMMSC152	VMMSEAL150	VMMSC152	VMMRC-SB151	VMMRC152-6R	VMMRC152-6L	VMMRC152-8R	VMMRC152-8L
153mm to 155mm 6-1/32" to 6-7/64"	VMMSEAL153	VMMSC156	VMMSEAL153	VMMSC156	VMMRC-SB154	VMMRC154-6R	VMMRC154-6L	VMMRC154-8R	VMMRC154-8L
156mm to 158mm 6-9/64" to 6-7/32"	VMMSEAL156	VMMSC158	VMMSEAL156	VMMSC158	VMMRC-SB157	VMMRC158-6R	VMMRC158-6L	VMMRC158-8R	VMMRC158-8L
159mm to 161mm 6-17/64" to 6-11/32"	VMMSEAL159	VMMSC162	VMMSEAL159	VMMSC162	VMMRC-SB160	VMMRC160-6R	VMMRC160-6L	VMMRC160-8R	VMMRC160-8L
162mm to 165mm 6-3/8" to 6-1/2"	VMMSEAL162	VMMSC166	VMMSEAL162	VMMSC166	VMMRC-SB163	VMMRC164-6R	VMMRC164-6L	VMMRC164-8R	VMMRC164-8L

* VRC available as a single unit or pack of 5. For 5 pack part number add 'Pack' to the end of the single part number. Eg VRC24-6R-Pack



SUPERIOR PROTECTION FOR WIRE ROPES | www.viperwrl.com | Phone +61 2 9636 5655

REV E 01.2025

VIPER ROPE CLEANER (VRC)



Removes contamination from the wire rope prior to lubrication.

Built-up residual lubricant and any associated foreign material encapsulates the wire rope, keeping in water and increasing the rate of corrosion.

Effective lubrication cannot occur until this built up residual lubricant and contamination is removed and replaced with a high-quality lubricant.

Viper Rope Cleaners enable the removal of contamination or built up old lubricant from the wire rope prior to lubrication, improving the effectiveness of the lubrication process via the Viper WRL.

Viper Rope Cleaners (VRC's) are available in left and right hand lay, to suit 6 and 8 strand ropes and other strand configurations on request.



SMOOTH BORE WIRE ROPE CLEANER

For certain types of wire ropes where the standard Viper Rope Cleaner is not suitable the Viper 'Smooth Bore' rope cleaner is available. The Smooth Bore Rope Cleaner would typically be used on hose ropes with a large number of outer strands, some non-rotational ropes, ROV cables, etc, where the valleys between the strands are minimal and do not readily facilitate a standard Viper Rope Cleaner.



5 PACK VRC NOW AVAILABLE.
Viper Wire Rope Cleaners are now available in a pack of 5*. Buy in bulk and save 30%.

*VMMRC not available as a 5 pack.



sales@viperwrl.com
26 Prince William Drive,
Seven Hills, NSW, Australia 2147

Phone +61 2 9636 5655
www.viperwrl.com



www.viperwrl.com

VIP-VRC-1020-V1

Viper WRL Penetrating Grease VPG-0 Product Information

Tacky Fluid Grease Resists Water, Penetrates Wire Ropes

Viper WRL Penetrating Grease VPG-0, is a soft, semifluid formulation designed to coat wire rope with a thin lubricant film as well as penetrate to the core.

Its tacky, water-resistant characteristics enable it to adhere strongly and to seal out damaging moisture.

Viper WRL Penetrating Grease contains a wear-reducing additive that protects against premature wear and shields metal against corrosive attack.

Beneficial Qualities

Wear Reduction & Corrosion Protection

- Lubricates and reduces wear to wire rope and sheaves
- Protects wear-intensive areas such as cable drums and cable sheaves
- Lessens resistance when surfaces slide over one another, ensuring cooler operation
- Seals all surfaces, protecting against rust and corrosion
- Shields against corrosion attack

Tackiness & Water Resistance

- Clings tightly to wire ropes
- Resists sling-off; keeps work area clean
- Stays in place in presence of heat and moisture for long service life
- Increases service intervals, requiring less lubricant to be used

Smooth, Quiet Operation

- Enables strands to move freely, reducing fatigue
- Softens shocks with its full-bodied, semifluid properties

Versatility

- Excellent for wire rope and cables



Viper WRL Penetrating Grease VPG-0 Technical Data

	VPG-0
Thickener Type	Calcium
Texture	Tacky
Colour	Red/Gold
NLGI Grade	0
Unworked Penetration @ 25°C (77°F)	365
Dropping Point °C (°F)	82 (180)
Base Fluid Characteristics	
Viscosity @ 100°C (212°F), cSt, ASTM D445	12
Viscosity @ 40°C (104°F), cSt, ASTM D445	144.0
FlashPoint °C (°F)	204 (399)
Water Washout ASTM D1264	4.6%

Performance Requirements Met or Exceeded

- USDA H2

Recommendation

- Typical operating range is -29°C to 77°C (-20°F to 170°F)
- Not for high temperature use
- Not recommended for submerged applications

Typical Application

- Wire Rope
- Cable Sheaves
- Crane Wire Ropes
- Shiploader Hoist Luffing Ropes
- Mobile Cranes



Viper WRL Coating Grease VCG-1

Product Information

Coating Lubricant which Penetrates & Protects Wire Ropes

Viper WRL Coating Grease VCG-1, is a technologically advanced lubricant designed to withstand water washout, protect against corrosion, penetrate and also provide extreme pressure protection for winch drums and sheaves. The red tacky NLGI#1 grease will provide superior service life in marine and mining applications with non drip or fling tendencies.

Beneficial Qualities

Provides Superior Protection

- Minimises friction, heat and wear
- Protects against shock loading
- Resists rust, corrosion and oxidation

Seals out moisture

- Will not wash off, even in high turbulent water

Stays Put for Extended Use

- Clings to metal surfaces
- Won't wash off or pound out

Withstands Heat & Cold

- Performs well in broad temperature range
- Has dropping point of up to 177°C (350°F)
- Offers exceptional lubricating qualities even at high operating temps
- Maintains excellent pumpability even at low operating temps

Increases Uptime & Saves Money

- Lowers lubrication costs of wire ropes through increased relubrication intervals of wire ropes
- Reduces machinery downtime when applied with a Viper wire rope lubricator
- Reduces maintenance costs by reducing friction wear and most importantly corrosion in wire rope applications
- Simplifies inventory by being used as a bearing grease and wire rope lubricant.
- Red colour makes it easy to see in service.



Viper WRL Coating Grease VCG-1

Technical Data


	VCG-1
Thickener Type	Lithium 12-Hydroxy
Texture	Stringy
Colour	Red
NLGI Grade	1
Worked Penetration ASTM D217	320
Dropping Point °C (°F)	177 (350)
Base Fluid Characteristics	
Viscosity @ 100°C, cSt, ASTM D445	11.70
Viscosity @ 40°C, cSt, ASTM D445	144.0
Oxidation drop in psi @ 100hrs, ASTM D942	5
Corrosion Prevention DI H2O, ASTM D1743	Pass
Water Washout ASTM D1264	4.82%
Water Spray ASTM D4049	13.95%

Recommendations

- Suitable for all types of wire ropes requiring a coating type outer strand lubricant with some penetration.
- Ideal for use through the Viper Wire Rope lubricator
- Recommended for submersed applications

Typical Applications

- Crane Wire Ropes
- Shiploader Hoist Luffing Ropes
- Anchor Wire
- Tow Wire
- Tug Boats
- Rov Cables

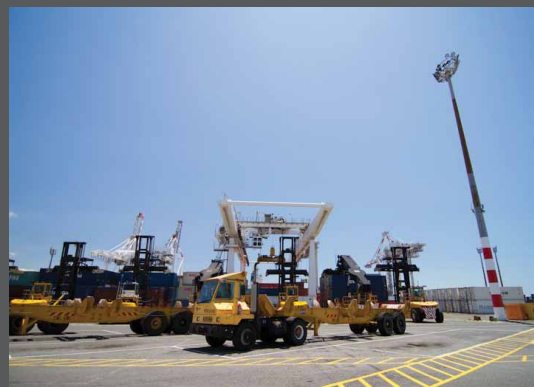

Below is list of approved lubricants that have been tested in application with the VIPER WRL systems and are compatible with all components of the Viper WRL Systems.

- ADDINOL NATUREPROOF SUPER 2 LE
- ADDINOL ROPESHIELD DF
- AMA , AMPAC WIRE ROPE GREASE M-00,01,02
- BRILUBE 60
- BRILUBE 70
- BRILUBE ECO Dressing (VGP compliance)
- BRILUBE ULTRA 2 (VGP compliance)
- CASTROL SPHEEROL SX2
- CLAREGUARD GRL
- CLARE SW2 -LF
- CLAREGUARD BIOMARINE MP (VGP compliance)
- CLAREGUARD BIOMARINE EP (VGP compliance)
- CorrosionX Grease
- CorrosionX Heavy Duty (Thin grease)
- ELASKON WR-EAL (VGP compliance)
- ELASKON WR-PGL
- FUCHS CEPLATTYN R-VGP (VGP compliance)
- HEXAGON QUANTUM 5353 (VGP compliance)
- Interflon Grease LS2
- Interflon grease LS 1/2
- Interflon Bio Grease MP2 (Eco Label)
- Interflon Grease OG
- JAX VG-PLUS WIRE ROPE LUBE 00 (VGP compliance)
- KAJO-BIO- Navigrease 320-0G (VGP compliance)
- KAJO-BIO-Navigrease 320-2G (VGP compliance)
- KAJO®-BIO-Grease CASX 2 (VGP compliance)
- KAJO -Titanus 460-2
- Klüberbio AG 39-602 N (VGP compliance)
- Klüberbio LG 39-701 N (VGP compliance)
- Klüberbio AM 92-142 (VGP compliance)
- Klüberplex AG 11-461 / 462
- LABOIL WIREDEFENSE
- LANOPRO Wire Grease ST2 EAL (VGP compliance)
- LUBRENE WRL-NF
- LUBRENE MS OGL
- LUBRICATION ENGINEERS, WIRELIFE, LE452/3
- LUBRICATION ENGINEERS, EARTHWISE LE3353 (VGP compliance)
- LUBRICATION ENGINEERS, LE1235 NLGI-1
- LUBRICATION ENGINEERS, LE1233 NLGI-2
- LUBRIPLATE 630-AAA, 630-AA AND 630-2
- MAK LUBES International ML200 Wire Rope Penetrating Grease
- MAK LUBES International ML221 Wire Rope Coating Grease.

- MAK LUBES ML253 Ecology EAL Wire Rope Grease (VGP compliance)
- MOBIL MOBILARMA 798.
- MOBIL SHC Aware Grease Series (VGP compliance)
- MOLYSLIP WRL-C5
- MOLYSLIP WRL-CV
- MOLYSLIP WRL-E40 (VGP compliance)
- MOLYSLIP WRL-S
- NYROSTEN BIOGREASE VGP 02/01 (VGP compliance)
- NYROSTEN CL 633 MO
- NYROSTEN T55-13-20510 Paste 20%
- NYROSTEN A 19/200 Paste 15%
- PANOLIN BIOGREASE EP1 & BIOGREASE LL-EP2 (VGP compliance)
- PANOLIN MARGREASE W EP0 & EP2 (VGP compliance)
- QUAKERTEK™ CADENAS WT
- QUAKERTEK™ BIO - CABLES
- ROPETEX Heavy Duty Lube 70
- ROPETEX Heavy Ultra Lube 2 (VGP compliance)
- ROCOL, BIOGEN WIRESHIELD (VGP compliance)
- ROCOL, WIRESHIELD
- RSC BIO SOLUTIONS ENVIROLOGIC® 2 WREP GREASE (VGP-compliant)".
- SHELL Naturelle S2 Wire Rope Lubricant A (VGP Compliance)
- SHELL Gadus S3 Wire Rope A
- VICKERS OILS BIOGREASE EP2 (VGP Compliance)
- VIPERWRL, VPG-0
- VIPERWRL, VCG-1
- VIPERWRL, ERG-1 (VGP compliance)

This is not an endorsement of the above-mentioned products.

*VGP compliance is based on manufactures statement.

**ViperWRL Pty. Ltd. Recommends you consult your respective lubricant company for Storage, Cleaning, and any special procedures to use their product with ViperWRL Systems. **

Revised 09/10/2025. V10