


CM2-002 LASER MARKING PLACEMENT APPROVAL

SCALE 1:1 · UNDERSIDE VIEW

REAR / THICK EDGE / USB SIDE (+Y)

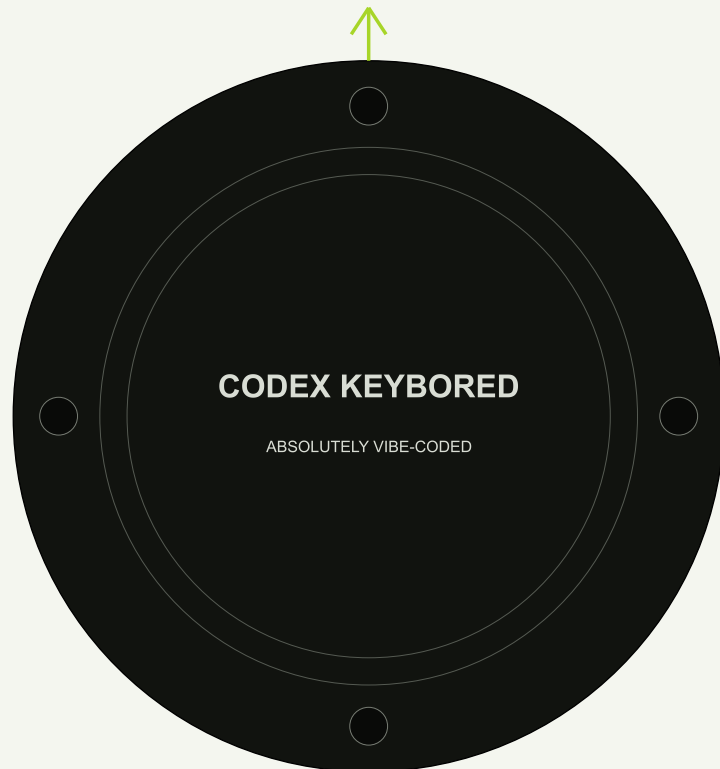

Ø94 PART OUTLINE

G-65 GROOVE SHOWN FOR ALIGNMENT ONLY

ALL REFERENCE GEOMETRY: DO NOT MARK

PART: CM2-002_bottom_weight.step · ITEM: CNC2607185001881-3086316A

FACTORY INSTRUCTION

- Accept laser marking instead of machined/recessed text.
- Laser after fine bead blast + black matte anodizing.
- Result: natural aluminum / silver mark on black surface.
- Hatch/fill LASER_MARK as compound glyphs; preserve counters/holes.
- Do not resize, rotate, mirror, or substitute the font.
- Do not machine the 0.25 mm-deep text contained in the STEP.
- Preserve the O-ring groove, holes, wedge angle, and all other geometry.

CONTROLLED ARTWORK

CODEX KEYBORED: 39.498 × 3.109 mm outlines; 4.2 mm nominal font size

ABSOLUTELY VIBE-CODED: 27.122 × 1.556 mm outlines; 2.1 mm nominal font size

Origin: part center (0,0). Main center Y +4.000; strapline Y -4.000.

ONLY THE LASER_MARK LAYER IS PRODUCTION ARTWORK

FIRST ARTICLE · CONTACT CUSTOMER BEFORE ANY ARTWORK CHANGE