EXP NO: 10b
DATE: 15/10/26

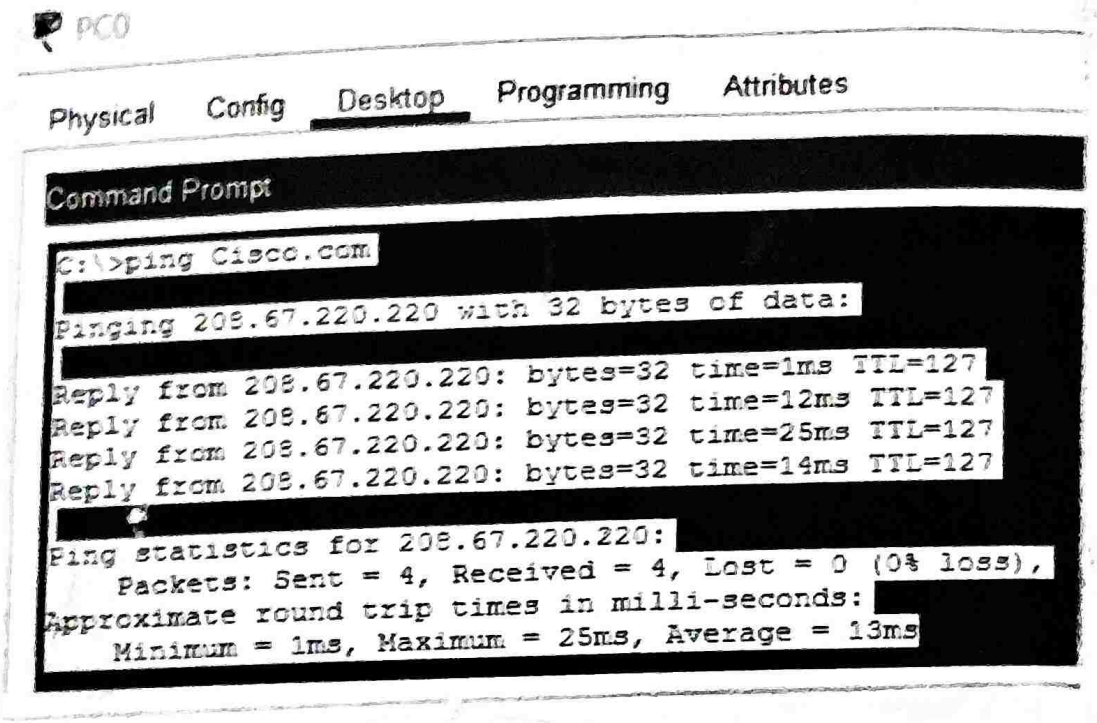
DESIGN AND CONFIGURE AN INTERNETWORK USING WIRELESS ROUTER, DHCP SERVER AND INTERNET CLOUD

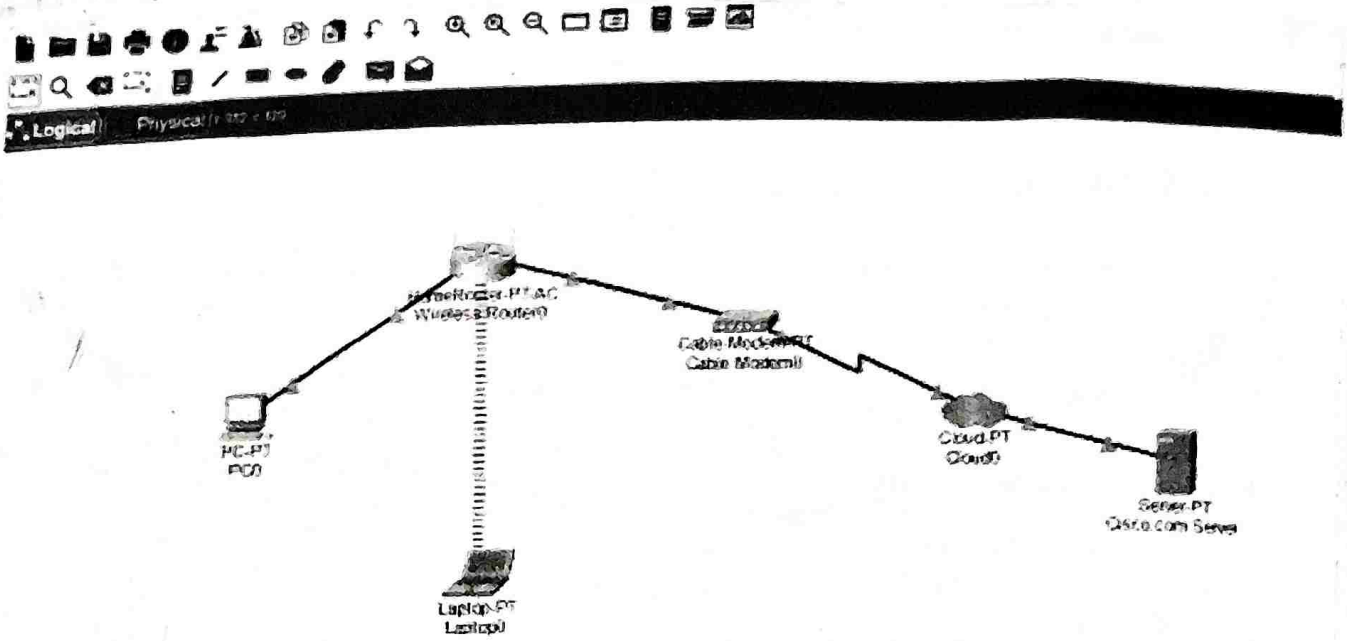
AIM:

To design an configure an Internetwork using a wireless Router, DHCP Server and Internet Cloud In Cisco Packet Tracer...

PROCEDURE:

1) Open Cisco Packet Tracer and create a new workspace.
2) Place the required devices.
3) Connect the Wireless Router to the Cable Modem using the appropriate cable.
4) Connect the Cable Modem to the Internet Cloud using a Coxial connection.
5) Configure the Wireless Router LAN.
6) Configure the wireless settings.
7) Configure the Cisco.com Server.
8) Configure the PC to obtain its IP address using DHCP.
9) Configure the laptop to connect to the wireless network.
10) Repeat the wireless connection procedure for the required wireless devices.


PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
C:\>ping Cisco.com
Pinging 208.67.220.220 with 32 bytes of data:
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=12ms TTL=127
Reply from 208.67.220.220: bytes=32 time=25ms TTL=127
Reply from 208.67.220.220: bytes=32 time=14ms TTL=127
Ping statistics for 208.67.220.220:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 25ms, Average = 13ms


Logical
Physical
PC-PT
PC0
Cable Modem-PT
Cable Modem0
Cloud-PT
Cloud0
Server-PT
Cisco.com Server
Laptop-PT
Laptop0

11) On the PC open Command Prompt and execute:

ipconfig /release
ipconfig /renew

12) Verify that the PC receives

A 192.168.0.x IP address
Subnet mask 255.255.255.0
Default gateway 192.168.0.1
DNS Server 208.67.220.220.

13) Test the connectivity to the CISCO.com server.

ping CISCO.com

14) Verify the PC receives replies from 208.67.220.220

RESULT:

Thus, an Internetwork using a Wireless Router, DHCP Server, and Internet cloud was successfully designed & configured in CISCO Packet Tracer.