


MFG-SP-MM-01 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

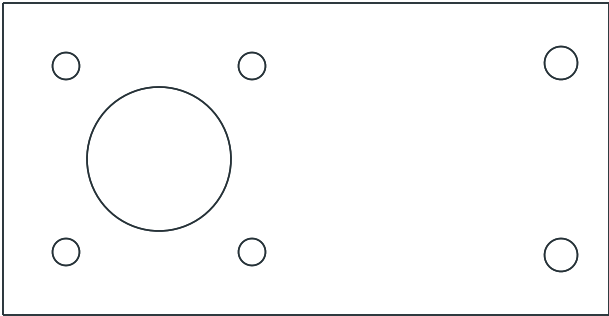

SIDE Y-Z



Drawing MFG-SP-MM-01 | Part SP-MM-01 — Universal NEMA17-class spool motor plate | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 6 mm 6061-T6 | Process/finish: laser/waterjet + drill

Overall: X 101.000 × Y 6.000 × Z 52.000 mm | general tolerance ISO 2768-m unless noted

Critical: 101 x6 x52; motor centre X26, Ø24; 4xØ4.5 at 31 mm square; 2xØ5.5 profile tab; actual donor shaft and body measurement required before coupling release

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.