


MFG-CUT-04 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

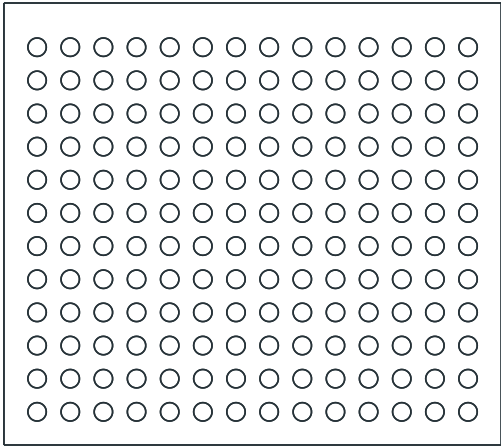

SIDE Y-Z



Drawing MFG-CUT-04 | Part CUT-04 — 5 mm aperture screen | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 3 mm 304 stainless | Process/finish: laser cut + deburr

Overall: X 135.000 × Y 120.000 × Z 3.000 mm | general tolerance ISO 2768-m unless noted

Critical: 135 x 120 x 3; apertures diameter 5.0 on 9.0 pitch; all strand-side edges R0.3; verify minimum 1.9 mm rotating clearance with shims before powered test

GD&T/datums: A=shaft bore axis; B=ground stack face; C=keyway centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; inspect flatness/parallelism and stack gap with metal shims

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.