

# MFG-EX-DIE-02 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

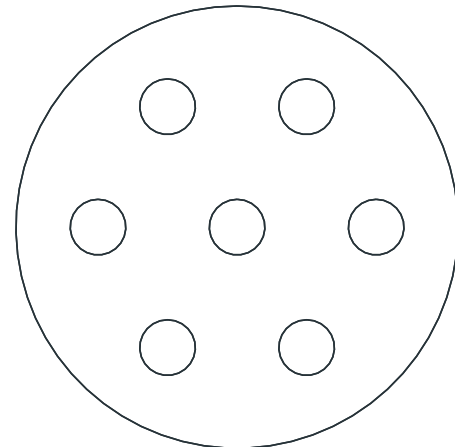

Drawing MFG-EX-DIE-02 | Part EX-DIE-02 — Seven-hole breaker plate | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit  
b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 304 stainless | Process/finish: wire EDM or laser + double-side lap

Overall: X 2.000 × Y 15.900 × Z 15.900 mm | general tolerance ISO 2768-m unless noted

Critical: Ø15.90 -0.05/0 x2.00 ±0.03; 7x Ø2.00 +0.05/0, six on PCD10; flatness 0.03; all flow edges R0.15 max; HOLD with die body

GD&T/datums: A=barrel interface face; B=melt-channel axis; C=fastener-pattern centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; pin-gauge channels/orifice; face flatness; shielded hydro/hot-polymer containment test

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT\_RUN; machining USER\_APPROVAL\_REQUIRED.