


MFG-EX-THR-01 · v0.8 MANUFACTURING DRAWING

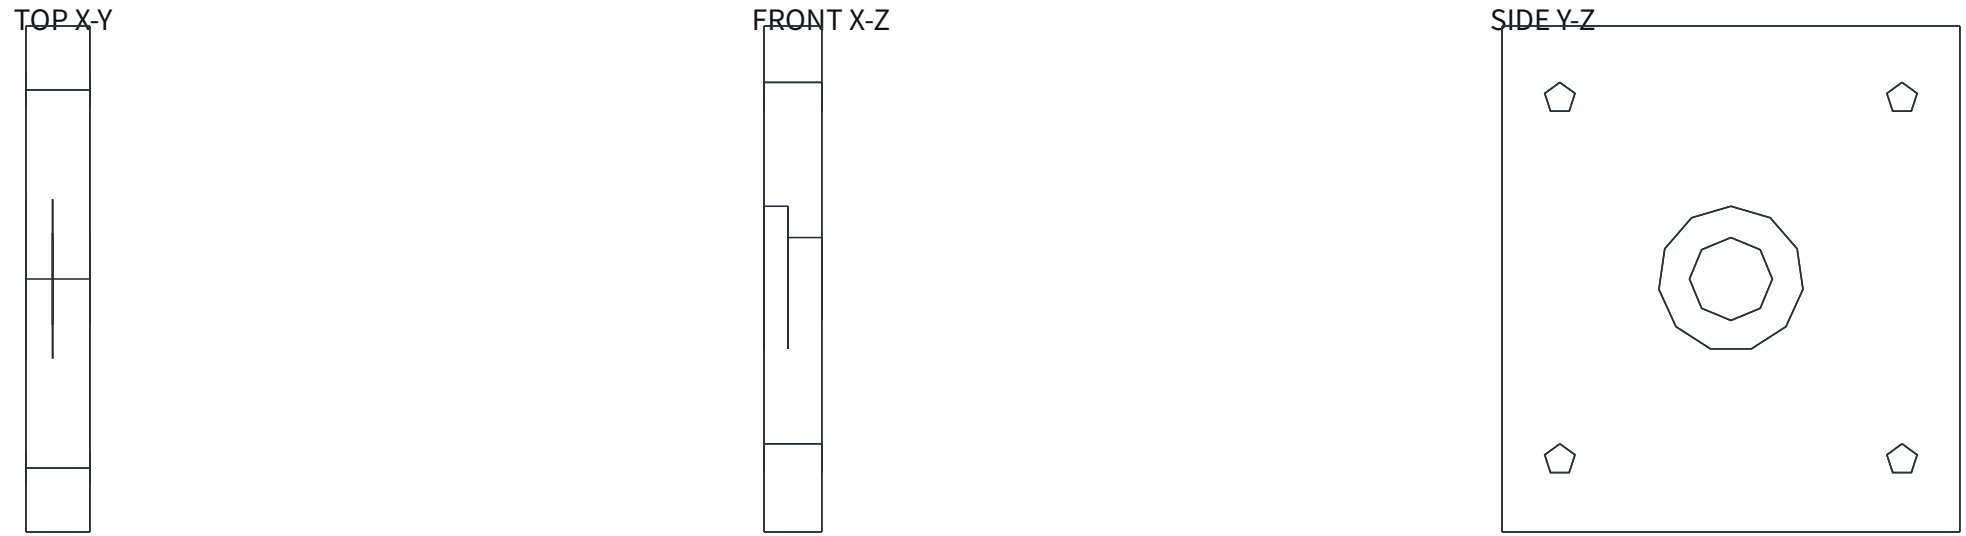

Drawing MFG-EX-THR-01 | Part EX-THR-01 — Extruder thrust plate | Qty 1
Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: 12 mm S45C normalized steel | Process/finish: laser rough + bore/seat finish

Overall: X 12.000 × Y 95.000 × Z 105.000 mm | general tolerance ISO 2768-m unless noted

Critical: 12 x95 x105; passage Ø17.2; thrust seat Ø30.2 x5; 4xØ6.6; seat axis square 0.05; metal-to-profile load path

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis
parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.