
Multi-Stage EMI/EMC Filter with Connector (MIL STD)
多级 EMI/EMC 滤波器带航插

Technical Specifications 技术规范

Product Name 产品名称	Military AC Single-phase Power line EMI/EMC Filter with Military Aviation Socket 军用交流单相电源线 EMI/EMC 滤波器，带军用航插
National Bid Contract Number 国家合同招标标号	Suppressor and Filter Purchase Contract 200630-2660 消音器和过滤器采购合同 200630-2660 Part Patent Number: MNF 103-722-5A 722 Research Institute of China Shipbuilding Industry Corporation 中国船舶重工集团公司第七二二研究所
Item Name 型号	MIL Filter EFT ET-M5BXXXX + Mil Connector XCH18F4Z1D (Johnhon)
Rated Operating Voltage 额定电压	250 VAC, 50/60 Hz
Operating Frequency 频率	DC to 400 Hz
Rated Current 额定电流	05A@40 ^{0}C max.
Leakage Current 泄漏电流	≤1 mA@250VAC
High Potential Testing Voltage 试验电压	Line to Line 线-线：1450 VDC for 01 Minute Line to Ground 线-地： 1500 VDC for 01 Minute
Mean Time Between Failure (MTBF) @40 ^{0}C 平均故障间格时间	220,000 hours
Insulation Resistance 绝缘电阻	≥200MΩ@500VDC
Work/ Storage Temperature Range 工作/存储温度范围	-55 ^{0}C ～ +85 ^{0}C
Weight 重量	≤600g
Compliance 标准	Military Standard GJB151 (Specially designed for Military equipment Electromagnetic Compatibility) 专为军用设备电磁兼容国军标 GJB151 标准而设计
Applications 应用	Military Power Supplies for drive controller, measuring equipment, monitoring equipment, communication equipment, signal processing equipment etc 用于驱动控制器、测量设备、监控设备、通信设备、信号处理设备等军用电源

CHARACTERISTIC ELECTRICAL SCHEMATIC

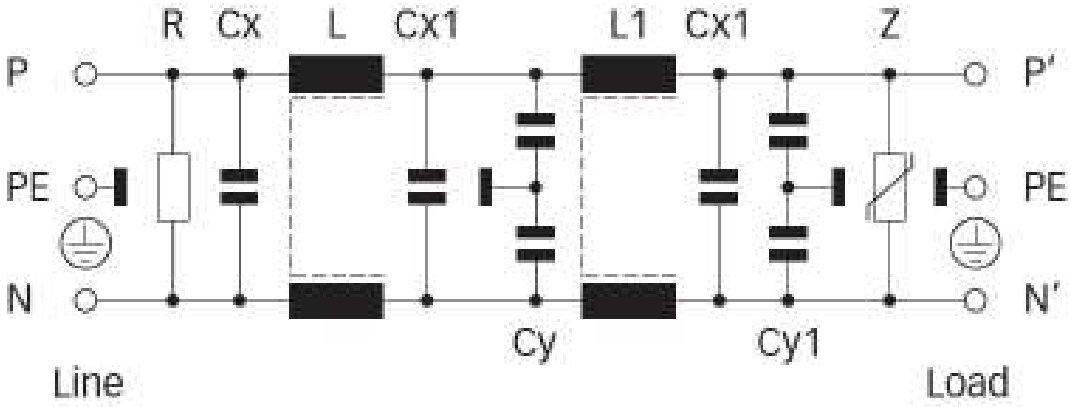

DIMENSIONS

