# WA nietA [R-6051]







- RPM surge on coast or light acceleration
- Harsh downshifts
- · Overheated fluid

Note: Requires tool kit F-25741-TL29 & the VB-FIX reaming fixture.

(2) 25741-01K



**Oversized Pressure Regulator Valve & End Plug Kit** 

Helps cure:

- Excess pressure in reverse
- Fluid & converter lining overheat
- Bushing failure

Note: Requires tool kit F-25741-TL & the VB-FIX reaming fixture.

(3) 25741-11K



### **Secondary Regulator Valve Kit**

Helps cure:

- Overheating fluid, bushing & converter
- Harsh reverse engagement
- TCC slippage/surge

Note: Requires tool kit F-25741-TL11 & the VB-FIX reaming fixture.

(4) 25741-18K





**Solenoid Modulator** Valve Kit


Fits 2 Locations

Helps cure:

- Linear solenoid and/or gear ratio codes
- Slippage or shock on kickdown
- Slippage in steady driving 4, 5 or 6th gear

Note: Requires tool kit F-25741-TL18 & the VB-FIX reaming fixture.

1 Automatic Drive • P.O. Box 440 • Bellows Falls, VT 05101-0440 USA

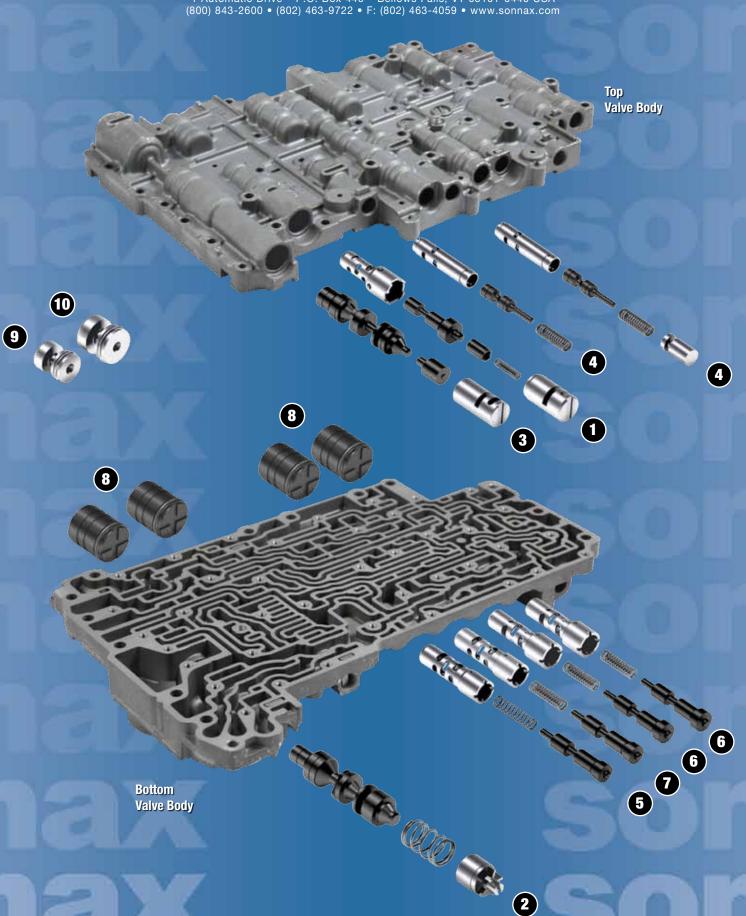

©2010 Sonnax Industries, Inc.





### **K1 Clutch Control** Valve Kit


Helps cure:


- Flare upshifts or downshift bind-ups
- Excess clutch overlap & distress
- Pressure control "out of range" codes

Note: Requires tool kit F-25741-TL25 & the VB-FIX reaming fixture.

(6) 25741-05K







Fits 2 Locations

Helps cure:

- Flare upshifts or downshift bind-ups
- Excess clutch overlap & distress
- Pressure control "out of range" codes

Note: Requires tool kit F-25741-TL5 & the VB-FIX reaming fixture.

(7) 25741-08K



Helps cure:

- Flare upshifts or downshift bind-ups
- Excess clutch overlap & distress
- Pressure control "out of range" codes

Note: Requires tool kit F-25741-TL8 & the VB-FIX reaming fixture.

15741-14K

Fits 4 Locations

#### **Accumulator Piston Kit**

Helps cure:

- Delayed engagements
- Slipping in forward gears
- Burnt clutches

(9) 15741-35K

5 Small, 9mm

**O-Ringed End Plug Kit** 

(10) 15741-36K

5 Large, 11mm

## **O-Ringed End Plug Kit**

Helps cure:

• Shift complaints associated with circuit pressure loss

Note: Each kit comes with seven O-rings and fits multiple locations.







