

OEM Ratio Boost Valve & Sleeve Kits

54200-12K Small boost ratio
.564" valve- small spool diameter
(066 OEM Mark)


NEW Product
54200-14K Sm./Med. boost ratio
.570" valve- small spool diameter
(067 OEM Mark)

54200-01K Medium boost ratio
.630" valve- small spool diameter
(448 OEM Mark)

54200-06K Large boost ratio
.649" valve- small spool diameter
(264 OEM Mark)

Each kit includes the following

- 1 Valve
- 1 Sleeve

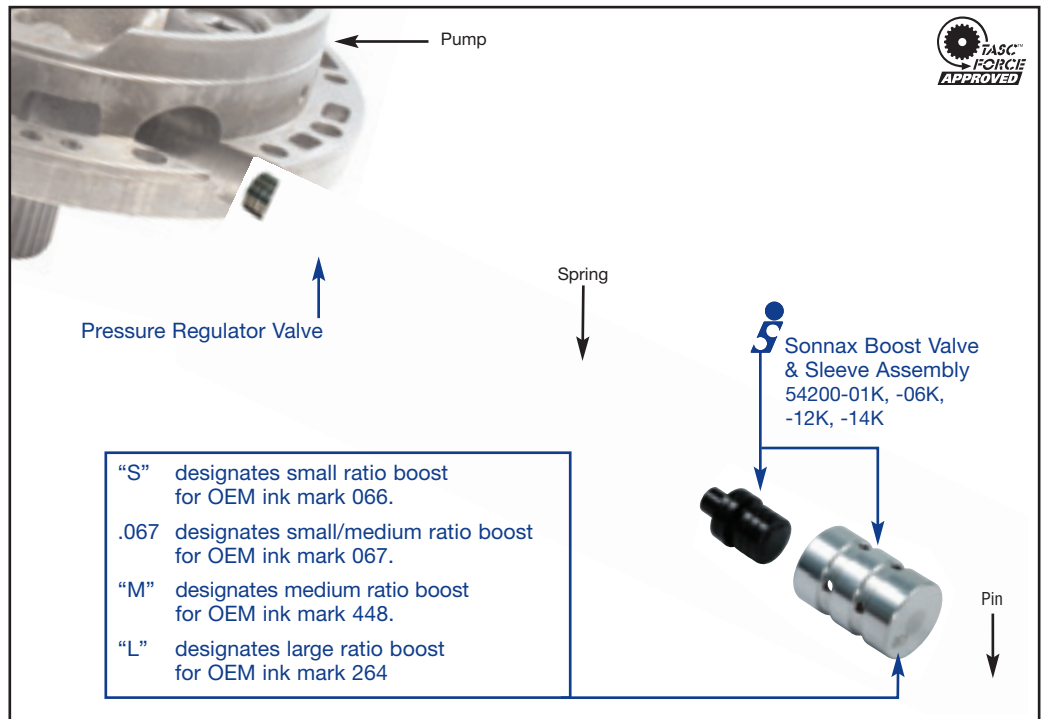

There are four boost ratios available to cover the most common OEM applications:

54200-12K has a **Small** boost ratio (The end of the sleeve has been marked with an “S” to designate a small ratio boost valve and sleeve, and is equivalent to the OEM/Euro mark of 066).

Large spool diameter = .605" (15.25mm)

Small spool diameter = .564" (14.30mm)

54200-14K has a **Small-to-Medium** boost ratio (The end of the sleeve has been marked with an “067” to match the equivalent OEM/Euro mark of 067).

Large spool diameter = .634" (16.09mm)

Small spool diameter = .570" (14.49mm)

54200-01K has a **Medium** boost ratio (The end of the sleeve has been marked with an “M” to designate a medium ratio boost valve and sleeve, and is equivalent to the OEM/Euro mark of 448).

Large spool diameter = .662" (16.80mm)

Small spool diameter = .630" (16.00mm)

54200-06K has a **Large** boost ratio (The end of the sleeve has been marked with an “L” to designate a large ratio boost valve and sleeve and is equivalent to the OEM/Euro mark of 264).

Large spool diameter = .697" (17.70mm)

Small spool diameter = .649" (16.50mm)

Instructions:

1. Remove and discard the OEM boost valve and sleeve.
2. Reassemble using the new Sonnax valve and sleeve.

