


Lockup Control Valve & Sleeve Kit

59947-03K

1 Lockup Control Valve
1 Lockup Control Sleeve

Note: Also fits AW55-51SN, AF 23/33 and RE5F22A units.

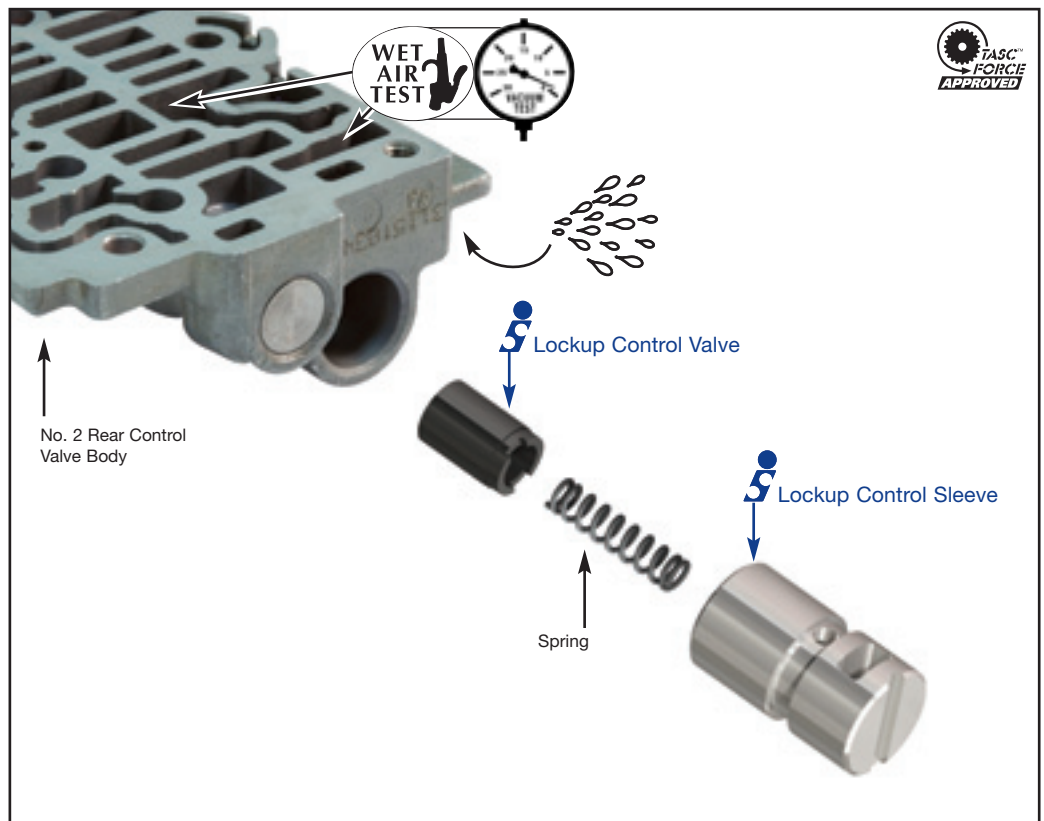

Instructions:

1. Remove and discard the OEM sleeve and valve.
2. Install the Sonnax sleeve and valve assembly as pictured, with sleeve rotated so slot is pointing up.

Verification:

Perform a Wet Air Test or vacuum test of the sleeve assembly while in the bore at the outboard converter apply feed port and TCC signal oil port as indicated. A vacuum test should reach at least 18" of vacuum. If performing a WAT, no leakage should occur at the neighboring exhaust port on the opposite side of the casting.

For more information on valve body testing procedures, go to www.sonnax.com.