

### Bike Frames Day 2 Learning objectives

- Interpret stress–strain curves (elastic region, yield, UTS, fracture).
- Calculate engineering stress and engineering strain from experimental data.
- Describe how yield strength and UTS differ.
- Explain density and specific strength.
- Compare steel, aluminum, titanium, and carbon fiber bicycle frames.

### How do the properties of metals vs ceramics vs composites compare?

Metals are typically...

Ceramics are typically...

Plastics are typically...

Composites are materials made up of two or more different classes of materials typically to get the "best of both worlds"

### Group activity:

1. Which material would you expect to have **strongest** bonds?

**Let's draw typical Stress-strain curves for different materials**

We can identify some key regions on this plot

- Elastic deformation = deformation that is non-permanent (will bounce back)
- Plastic deformation = permanent deformation
- Yield strength = strength corresponding to 0.02 residual strain (2% left over even when stress released)
- Ultimate tensile strength = highest stress supported during testing
- Failure strength = stress at failure
- Elastic modulus = slope of stress vs strain in elastic region
- Toughness = area under the curve before fracture
- Resilience = area under the curve before plastic deformation

**Group activity:** Let's test the stress and strain of some real materials!!

### **Engineering stress/strain vs true stress/strain**

As a material elongates (under tensile load) it will also get skinnier. Therefore, the cross-sectional area is changing during the strain. True stress and strain takes into account this instantaneous cross-sectional area, whereas engineering stress/strain is calculated with the unloaded cross-sectional area.

“Engineering stress is for designing parts; true stress is for research and failure analysis.”

### **Density**

Why is steel so heavy while aluminum is so light? Why is titanium somewhere in-between?

**Density ( $\rho$ ):** How dense stuff (mass) is packed into a certain amount of space (volume)

$$\rho = \frac{m}{V}$$

Units are usually grams/cubic centimeter or g/cc or kg/m<sup>3</sup>

Water has a density of 1 g/cc


Let's try converting  $1 \text{ lb/ft}^3$  to g/cc

A few typical material densities

- Steel  $\approx 7.8 \text{ g/cm}^3$
- Titanium  $\approx 4.5 \text{ g/cm}^3$
- Aluminum  $\approx 2.7 \text{ g/cm}^3$
- Carbon fiber composite  $\approx 1.6 \text{ g/cm}^3$

**Specific strength:** A measure of how strong a material for its weight

$$\frac{\sigma}{\rho}$$

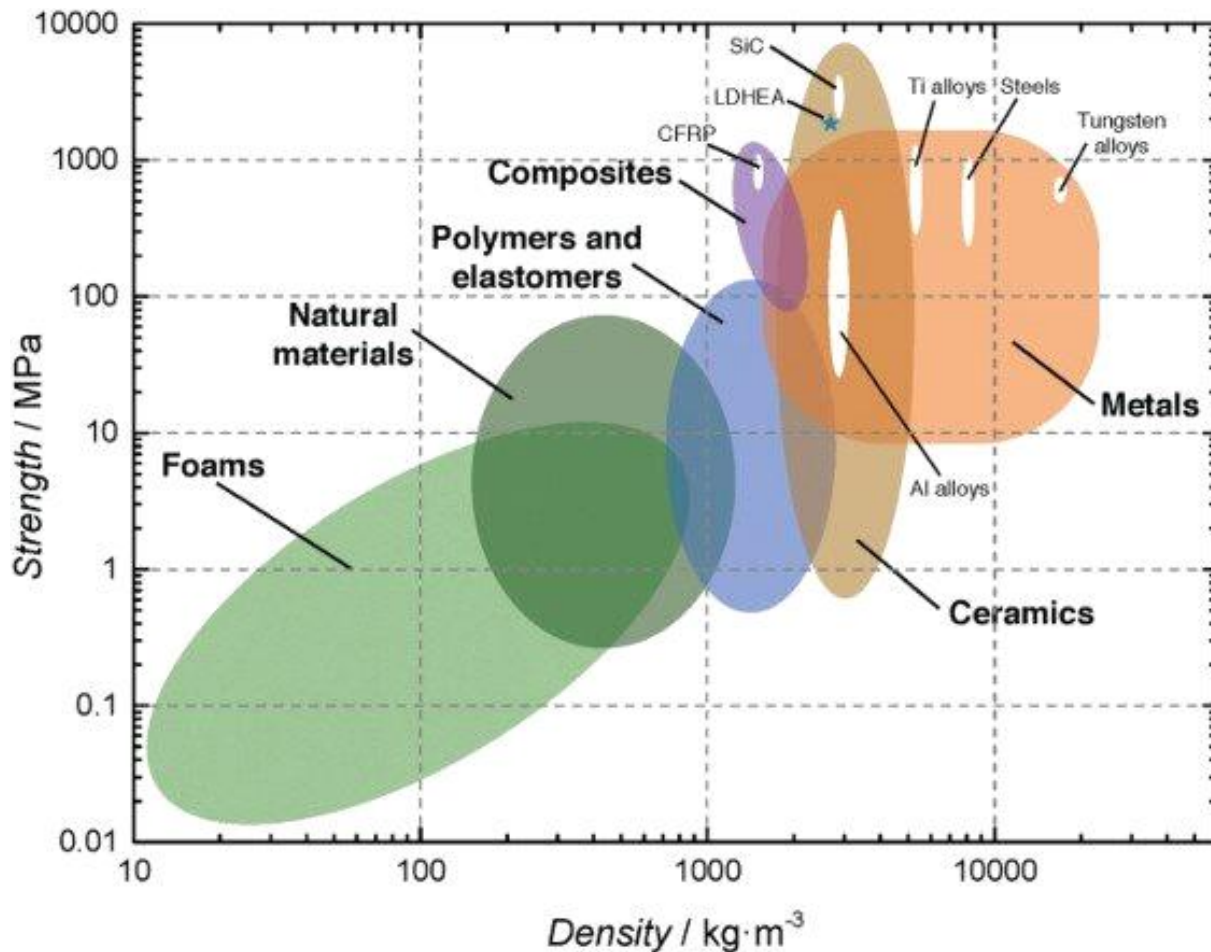

## Pros and cons of specific materials

### Steel:

- Pro: High strength, low cost, easy to repair. Cons: Heavy and prone to rust (unless alloyed).
- Corrosion resistant variations (chromoly 4130, "Reynolds 531")
  - If you don't know if steel is high quality or not, tap on it with fingernail and listen for ring (high-quality) or thunk (low quality).
- Decent vibration damping for good ride "feel"
- Joining tubes
  - Classically connected with lugs (thick sections the tubes slide into) where tube is brazed onto the lug. Easy to repair/replace.
  - Welding also possible. Care to ensure the welding won't weaken the steel (more on this later)
- Butted tubing can reduce weight and increase cost
- **Fatigue limits** ~0.3-0.6 of yield strength
- New super steel alloys causing a bit of a comeback for steel. For example, Reynolds 531 invented in 1935 had tensile strength of ~800MPa but Reynolds 853 released in ~2000 is air-hardened (so you can weld it) and has strength of 1200MPa, next gen Reynolds 953 has strength up to 2000MPa!
- Typical density 7.85g/cc, stiffness ~200GPa, strain 25% for 4130 (10-15% for low quality steel),

strength 460MPa yield, 560MPa ultimate,

#### Aluminum:

- Pros: Lightweight, corrosion-resistant, affordable. Cons: Lower fatigue resistance and stiffness.
- Better overall strength to weight ratio than steel
  - Optimal is actually 200:1 diameter to wall thickness ratio but this would be like a beverage can; too fragile for impacts so larger tubes are used impacting aerodynamics but improving resistance to impacts.
- No fatigue limit, so the material gets weaker as it's cycled due to microcrack growth
- Challenging to join (TIG welding possible)
- Not always lighter than steel
- Typical density 2.7g/cc, stiffness 70GPa, strain 6-12%, strength 270MPa yield, 310MPa ultimate,

#### Titanium:

- Pros: Corrosion-resistant, durable, and lighter than steel. Cons: Expensive and harder to work with.
- Most common alloys is Ti-3Al-2.5V (3% Al, 2.5% V) followed by Ti-6Al-4V (6% Al, 4% V)
- Tubes can be cold-drawn and hydroformed into many complex shapes for internal cabling.
- TIG required because prone to bad welds and breakage
- Not as stiff, a bit "flexy"
- Typical density 4.58g/cc, stiffness 100GPa, strain 15-30%, strength 500MPa yield, 620MPa ultimate,

#### Carbon Fiber:

- Pros: Extremely lightweight, high stiffness, customizable. Cons: Expensive, less durable under impact, harder to recycle.
- **Anisotropy** possible (different properties in different directions). Can achieve low vertical stiffness, high lateral stiffness.
- Prone to damage even from overtightening or improper installation of parts
- Cracking at interlaminar regions or adhesion points
- Can add other additives like metallic boron, graphene, kevlar etc to modify properties
- Typical density 1.55g/cc, stiffness 130GPa (Very anisotropic!), strain 2% (Achilles heel), strength 2500MPa ultimate (but only along fiber direction!)

#### Other materials?

- Magnesium. A few bikes are made of this alloy. It has 64% density of Aluminum so you can get real weight savings.
  - In 1980s Frank Kirk designed a die cast one piece made of I-beams rather than tubes! Out of business 1992. Not really a popular option.
- Sc alloys. This is aluminum with a very small amount of Scandium (0.5%) so this is mostly marketing. It does improve welding characteristics and fatigue resistance allowing smaller tubes and more frame

design options.

- Bamboo and wood, but these are uncommon.
- Combinations of materials for different components in the bike is very common

### **Example problem**

A carbon bike frame weighs 900 g at a density of  $1.6 \text{ g/cm}^3$ . A steel frame of the same volume would weigh how much?

**Group Activity: Let's look up different bike frames and make a plot of weight vs cost**