


Three-way rig

Build, tune, test, diagnose

ChatGPT edition

Job. Separates bait and sinker on two branches for controlled depth.

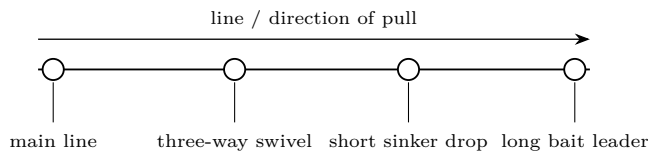

Components and build order

Tie the main line to one swivel eye, a sacrificial sinker drop to the second, and a longer leader with hook or lure to the third. Test for tangles.



Before tying
Reject nicked line, distorted eyes, dull points, cracked swivels, and hardware whose rating is unknown. Lay the four stages above in order. Which connection must pass through another component first? Which knot or crimp becomes inaccessible after the next stage? Measure leader, drop, stop, or bait position before trimming.

Measure and tune

1. Record line type and strength, leader or drop length, hook size, weight, bait size, and the intended depth. Do not call a rig “about right” without a number that can be repeated.
2. Ask: *What should remain fixed while one variable changes?* Begin with this rig’s main control: Measure sinker drop and bait leader separately; shorten only the branch that tangles, in 6 in steps, while holding speed constant.
3. Ask: *What does success look like beside the boat?* State expected sink rate, posture, clearance, or tracking before fishing.
4. Change one variable at a time and write the old and new values in the evidence log. If wind, depth, speed, or cover changed too, the comparison is not controlled.

Bench verification

Pull test

Wet and seat every knot. Wrap the line around smooth dowels or a scale—never bare hands—and pull steadily to a load safely above the expected fishing load but below the line’s rated strength. Hold for ten seconds. Reject the rig if a knot creeps, a tag shortens, line whitens or curls, a crimp slips, or hardware opens. Recheck after any snag or fish.

Behavior test

Lower the finished rig beside the boat, dock, or into a clear tub. Pull it at the speed used on the water, then stop and restart. Confirm the four stages remain in order, the bait is upright and free, the hook point is positioned as intended, and no component spins, fouls, or masks a bite. Repeat after the first cast.

Fault isolation

Observed fault	Isolate before changing	One-variable correction
Rig spins or twists	Remove bait; pull bare rig, then each stage	Straighten bait, correct orientation, or replace the faulty swivel
Tangles on cast or drop	Shorten the cast; watch which branch crosses first	Shorten one branch, slow the cast, or separate stages
No bottom/depth certainty	Verify measured depth and sink time	Adjust only weight, stop, or drop length
Poor bite detection	Test slack, posture, and connection seating	Change line angle or slack control before changing bait
Break or slip	Inspect the exact failure point under bright light	Retie or replace damaged line and repeat the pull test
Hook fouls or bait tears	Test hook and bait alone	Correct hook size, entry point, exposure, or support

STOP AFTER A FAILED TEST

A failed pull or behavior test is evidence, not bad luck. Do not strengthen a weak system by adding random hardware. Identify the first component that changed, correct it, and restart the full verification sequence.

Fish it

Move slowly along a contour with sinker contact intermittent, not plowing. Keep leader clear during turns.

- Pine Lake** Trace long deep basin edges.
- North Lake** Follow the eastern wall and central corridor.
- Adjustment** Measure sinker drop and bait leader separately; shorten only the branch that tangles, in 6 in steps, while holding speed constant.

On-water proof

Before the first cast, write a prediction: where the rig should travel, what contact or posture should be felt or seen, and which event will trigger the next change. After each controlled trial, log direct evidence—bottom ticks, weed contact, bait condition, line angle, missed strike, landed fish—rather than “worked” or “didn’t work.”

Date	Water	Depth	Setting	Evidence seen or felt	Next change

Decision rule
Keep a setting only when the expected behavior repeats. If it fails twice under comparable conditions, isolate one fault and change one measurement. If conditions changed, start a new row rather than crediting the tackle.

CONTROL THE HOOKS, FISH AND LAW

Multiple branches tangle easily; transport assembled rigs in a keeper. Use tackle strong enough to retrieve the target promptly. Prepare pliers and a knotless rubber net before the cast. If a hook is deep, cutting the line can be less damaging than prolonged extraction. Verify exact-water 2026–27 rules, hook count, bait law and seasons before every trip.

Source basis: Wisconsin DNR Hook, Line & Thinker; Hook Your Catch; Catch-and-Release Guidelines; Boat Transportation and Bait Laws.

Telos. Lake Country Fishing — Three-way rig. Revised 2026-07-27. Project-created text and diagrams are licensed CC BY 4.0. Incorporated public-domain artwork remains public domain and is credited on the plate it appears with. See LICENSE and CREDITS.md in the source. Nothing here is professional advice; verify current regulations and follow the stated safety procedure.