
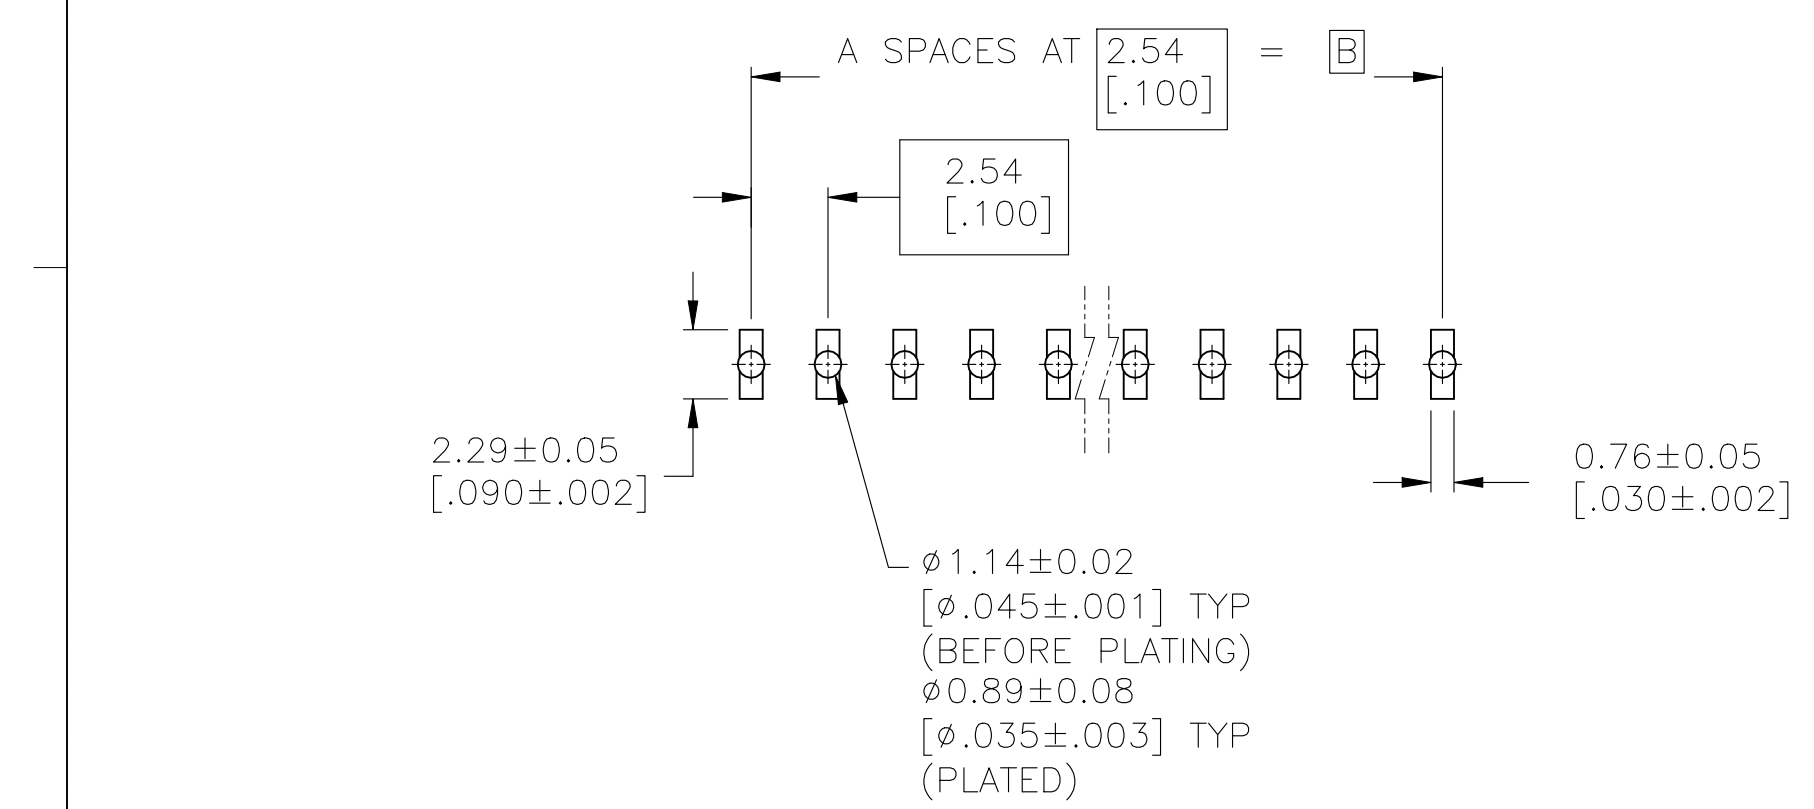


D

C

B

A

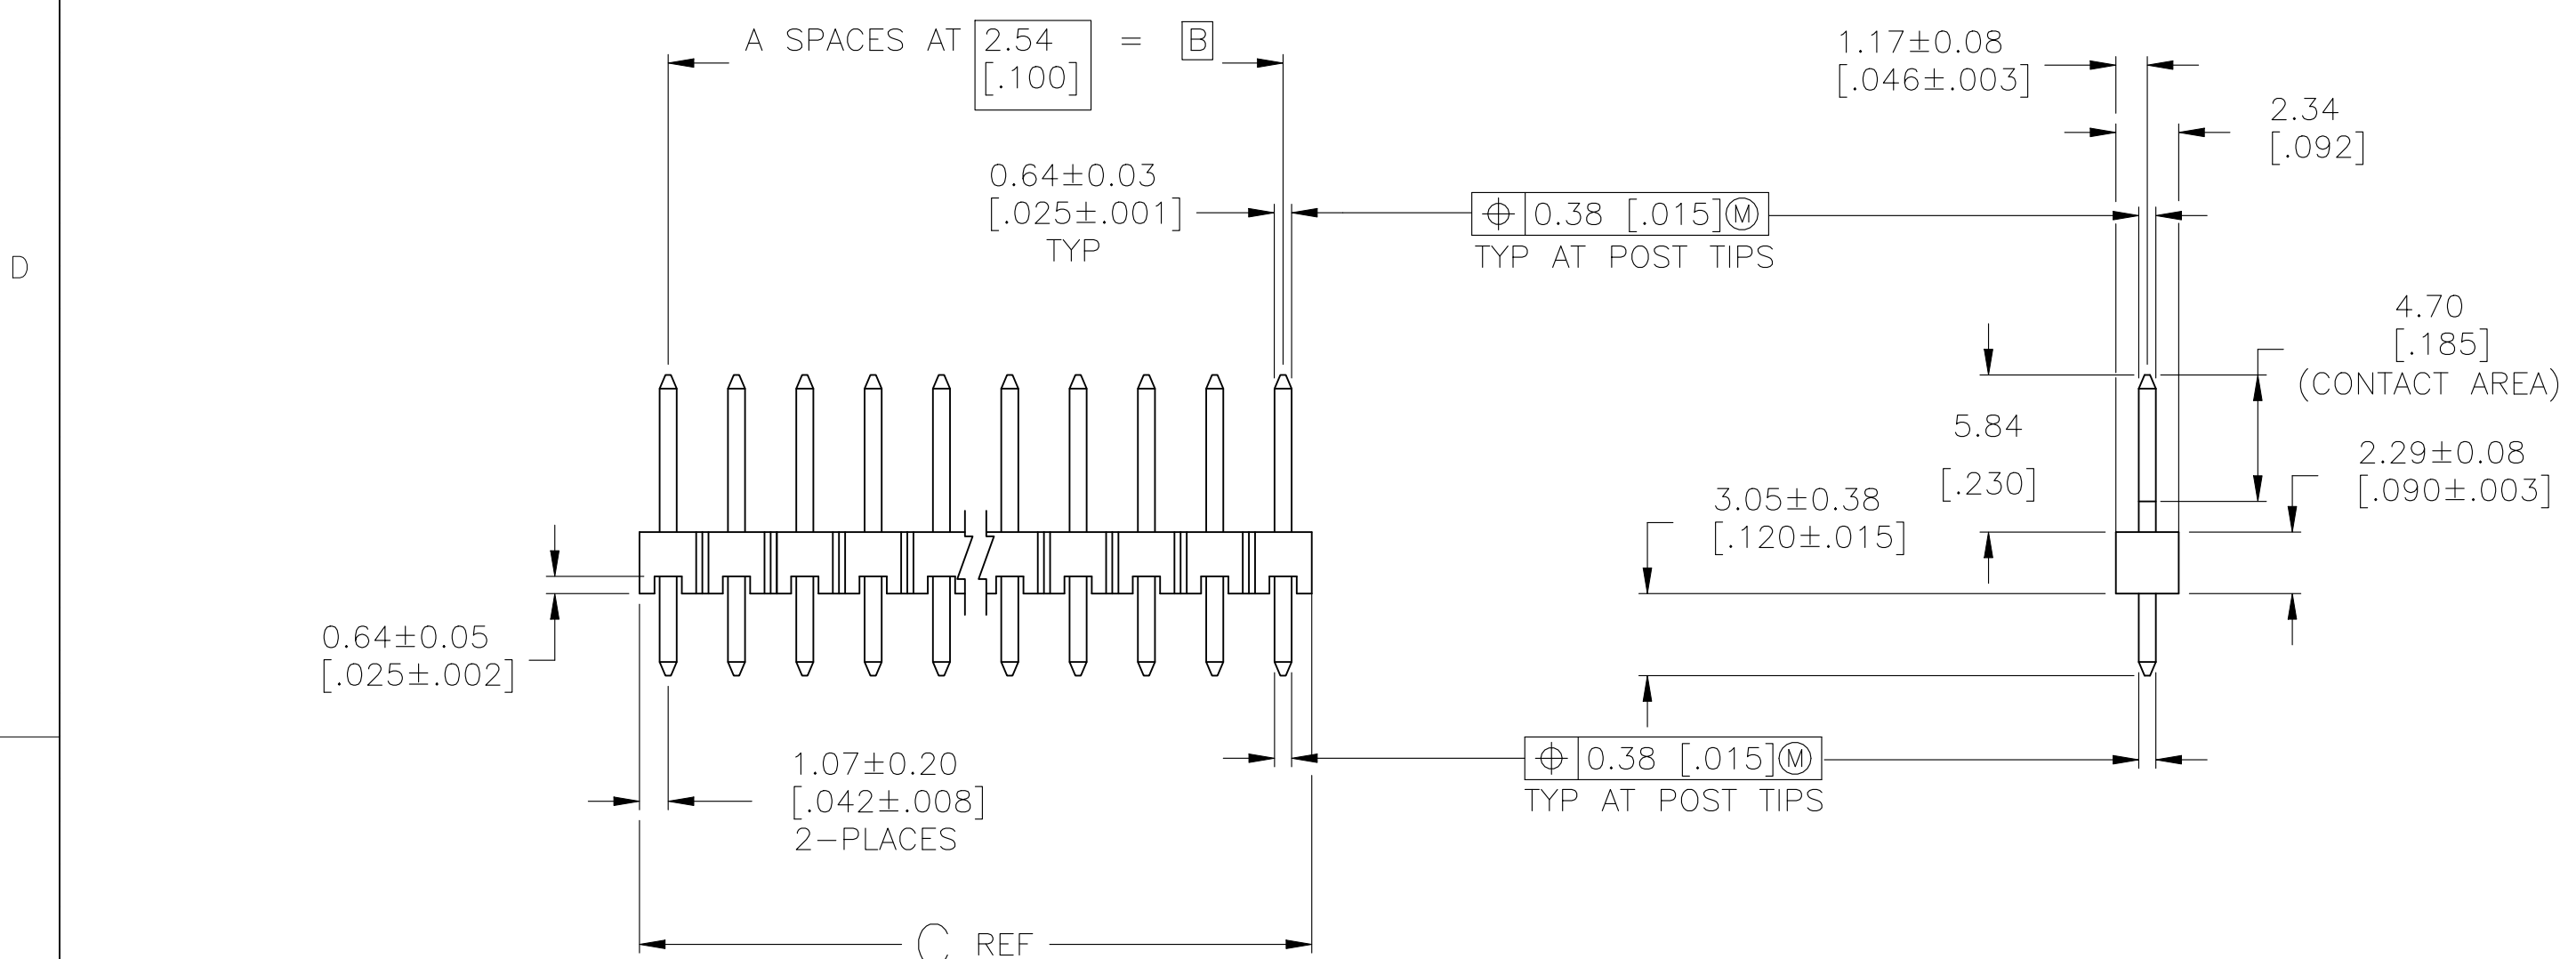

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK.

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 0.000381 [.000015] GOLD IN CONTACT AREA,
0.00254–0.00508 [.0000100–.0000200] MATTE TIN–LEAD ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 4 MATERIAL: HOUSING – LCP, COLOR: BLACK.
POSTS – COPPER ALLOY.
- 5 0.000381 [.000015] GOLD IN CONTACT AREA,
0.00254–0.00508 [.0000100–.0000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.
- 7 OBSOLETE

5	101.19 [3.984]	99.06 [3.900]	39	40	9–146280–0
5	98.65 [3.884]	96.52 [3.800]	38	39	8–146280–9
5	96.11 [3.784]	93.98 [3.700]	37	38	8–146280–8
5	93.57 [3.684]	91.44 [3.600]	36	37	8–146280–7
5	91.03 [3.584]	88.90 [3.500]	35	36	8–146280–6
5	88.49 [3.484]	86.36 [3.400]	34	35	8–146280–5
5	85.95 [3.384]	83.82 [3.300]	33	34	8–146280–4
5	83.41 [3.284]	81.28 [3.200]	32	33	8–146280–3
5	80.87 [3.184]	78.74 [3.100]	31	32	8–146280–2
5	78.33 [3.084]	76.20 [3.000]	30	31	8–146280–1
5	75.79 [2.984]	73.66 [2.900]	29	30	8–146280–0
5	73.25 [2.884]	71.12 [2.800]	28	29	7–146280–9
5	70.71 [2.784]	68.58 [2.700]	27	28	7–146280–8
5	68.17 [2.684]	66.04 [2.600]	26	27	7–146280–7
5	65.63 [2.584]	63.5 [2.500]	25	26	7–146280–6
5	63.09 [2.484]	60.96 [2.400]	24	25	7–146280–5
5	60.55 [2.384]	58.42 [2.300]	23	24	7–146280–4
5	58.01 [2.284]	55.88 [2.200]	22	23	7–146280–3
5	55.47 [2.184]	53.34 [2.100]	21	22	7–146280–2
5	52.93 [2.084]	50.80 [2.000]	20	21	7–146280–1
5	50.39 [1.984]	48.26 [1.900]	19	20	7–146280–0
5	47.85 [1.884]	45.72 [1.800]	18	19	6–146280–9
5	45.31 [1.784]	43.18 [1.700]	17	18	6–146280–8
5	42.77 [1.684]	40.64 [1.600]	16	17	6–146280–7
5	40.23 [1.584]	38.10 [1.500]	15	16	6–146280–6
5	37.69 [1.484]	35.56 [1.400]	14	15	6–146280–5
5	35.15 [1.384]	33.02 [1.300]	13	14	6–146280–4
5	32.61 [1.284]	30.48 [1.200]	12	13	6–146280–3
5	30.07 [1.184]	27.94 [1.100]	11	12	6–146280–2
5	27.53 [1.084]	25.40 [1.000]	10	11	6–146280–1
5	24.99 [.984]	22.86 [.900]	9	10	6–146280–0
5	22.45 [.884]	20.32 [.800]	8	9	5–146280–9
5	19.91 [.784]	17.78 [.700]	7	8	5–146280–8
5	17.37 [.684]	15.24 [.600]	6	7	5–146280–7
5	14.83 [.584]	12.70 [.500]	5	6	5–146280–6
5	12.29 [.484]	10.16 [.400]	4	5	5–146280–5
5	9.75 [.384]	7.62 [.300]	3	4	5–146280–4
5	7.21 [.284]	5.08 [.200]	2	3	5–146280–3
5	4.67 [.184]	2.54 [.100]	1	2	5–146280–2
5	2.13 [.084]	– [–]	0	1	5–146280–1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

5	7.21 [.284]	5.08 [.200]	2	3	5–146280–3
3	101.19 [3.984]	99.06 [3.900]	39	40	4–146280–0
3	98.65 [3.884]	96.52 [3.800]	38	39	3–146280–9
3	96.11 [3.784]	93.98 [3.700]	37	38	3–146280–8
3	93.57 [3.684]	91.44 [3.600]	36	37	3–146280–7
3	91.03 [3.584]	88.90 [3.500]	35	36	3–146280–6
3	88.49 [3.484]	86.36 [3.400]	34	35	3–146280–5
3	85.95 [3.384]	83.82 [3.300]	33	34	3–146280–4
3	83.41 [3.284]	81.28 [3.200]	32	33	3–146280–3
3	80.87 [3.184]	78.74 [3.100]	31	32	3–146280–2
3	78.33 [3.084]	76.20 [3.000]	30	31	3–146280–1
3	75.79 [2.984]	73.66 [2.900]	29	30	3–146280–0
3	73.25 [2.884]	71.12 [2.800]	28	29	2–146280–9
3	70.71 [2.784]	68.58 [2.700]	27	28	2–146280–8
3	68.17 [2.684]	66.04 [2.600]	26	27	2–146280–7
3	65.63 [2.584]	63.5 [2.500]	25	26	2–146280–6
3	63.09 [2.484]	60.96 [2.400]	24	25	2–146280–5
3	60.55 [2.384]	58.42 [2.300]	23	24	2–146280–4
3	58.01 [2.284]	55.88 [2.200]	22	23	2–146280–3
3	55.47 [2.184]	53.34 [2.100]	21	22	2–146280–2
3	52.93 [2.084]	50.80 [2.000]	20	21	2–146280–1
3	50.39 [1.984]	48.26 [1.900]	19	20	2–146280–0
3	47.85 [1.884]	45.72 [1.800]	18	19	1–146280–9
3	45.31 [1.784]	43.18 [1.700]	17	18	1–146280–8
3	42.77 [1.684]	40.64 [1.600]	16	17	1–146280–7
3	40.23 [1.584]	38.10 [1.500]	15	16	1–146280–6
3	37.69 [1.484]	35.56 [1.400]	14	15	1–146280–5
3	35.15 [1.384]	33.02 [1.300]	13	14	1–146280–4
3	32.61 [1.284]	30.48 [1.200]	12	13	1–146280–3
3	30.07 [1.184]	27.94 [1.100]	11	12	1–146280–2
3	27.53 [1.084]	25.40 [1.000]	10	11	1–146280–1
3	24.99 [.984]	22.86 [.900]	9	10	1–146280–0
3	22.45 [.884]	20.32 [.800]	8	9	146280–9
3	19.91 [.784]	17.78 [.700]	7	8	146280–8
3	17.37 [.684]	15.24 [.600]	6	7	146280–7
3	14.83 [.584]	12.70 [.500]	5	6	146280–6
3	12.29 [.484]	10.16 [.400]	4	5	146280–5
3	9.75 [.384]	7.62 [.300]	3	4	146280–4
3	7.21 [.284]	5.08 [.200]	2	3	146280–3
3	4.67 [.184]	2.54 [.100]	1	2	146280–2
3	2.13 [.084]	– [–]	0	1	146280–1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± –
1 PLC ± –
2 PLC ± 0.51 [.02]
3 PLC ± 0.127 [.005]
4 PLC ± 0.0127 [.0009]
ANGLES ± –

MATERIAL

4

SEE TABLE

DWN T. HOFFMAN 6/12/95
CHK G. DUBNICZKI 3/18/96
APVD G. DUBNICZKI 3/18/96

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT –

CUSTOMER DRAWING

TE Connectivity

HDR ASSY, MOD II, BREAKWAY,
SINGLE ROW, HIGH TEM, VERTICAL
W/.025 SQ POSTS, .100 Q

SIZE CAGE CODE DRAWING NO
A1 00779 146280

RESTRICTED TO

SCALE 4:1 SHEET 1 OF 1 REV H4