Multiplexing: "Resource Sharing"

EE450: Introduction to Computer Networks

Professor A. Zahid

Multiplexing

- Multiplexing is a resource sharing process allowing information from several information sources to be aggregated onto a single, high-speed link

combine

复用

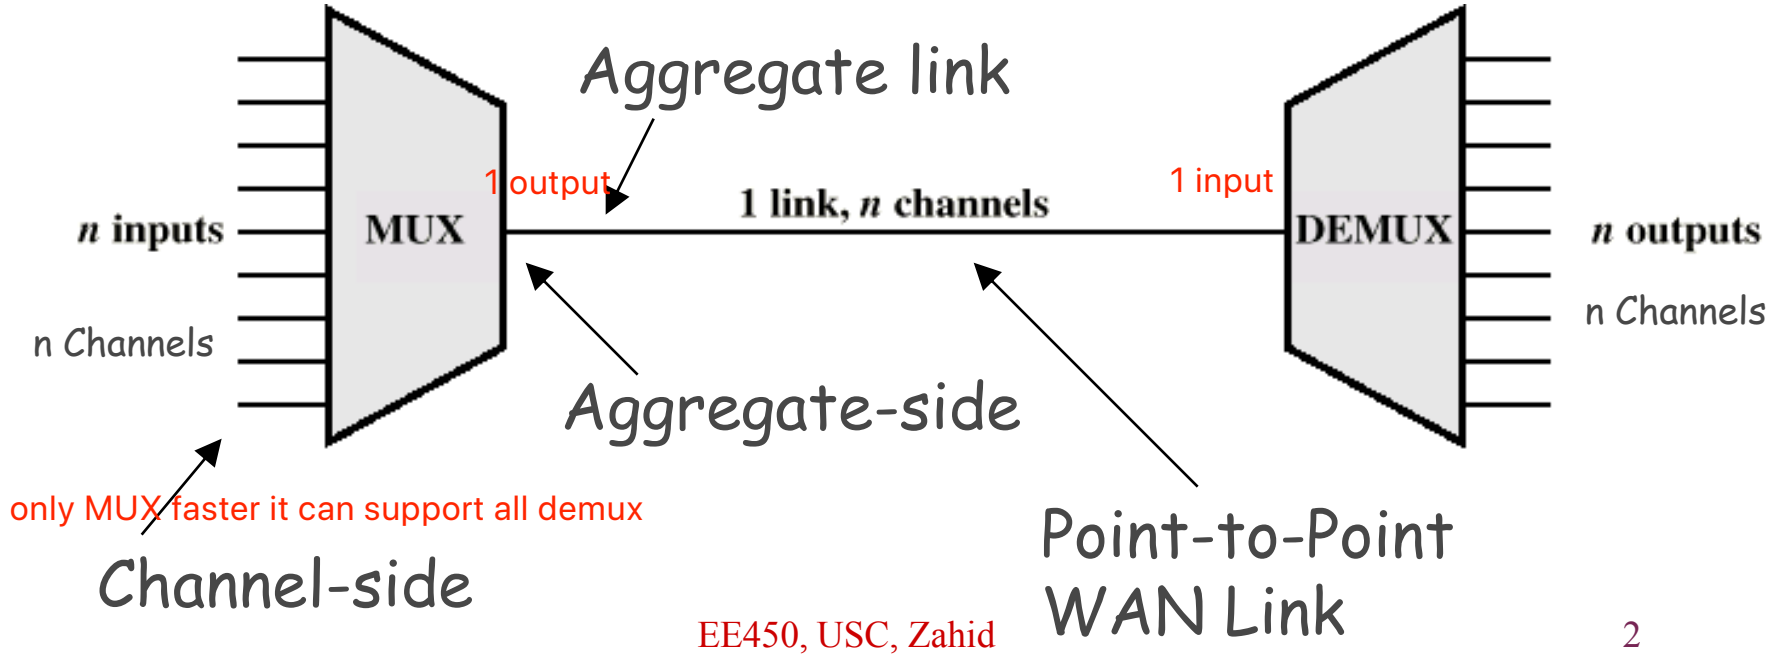

Categories of Multiplexing

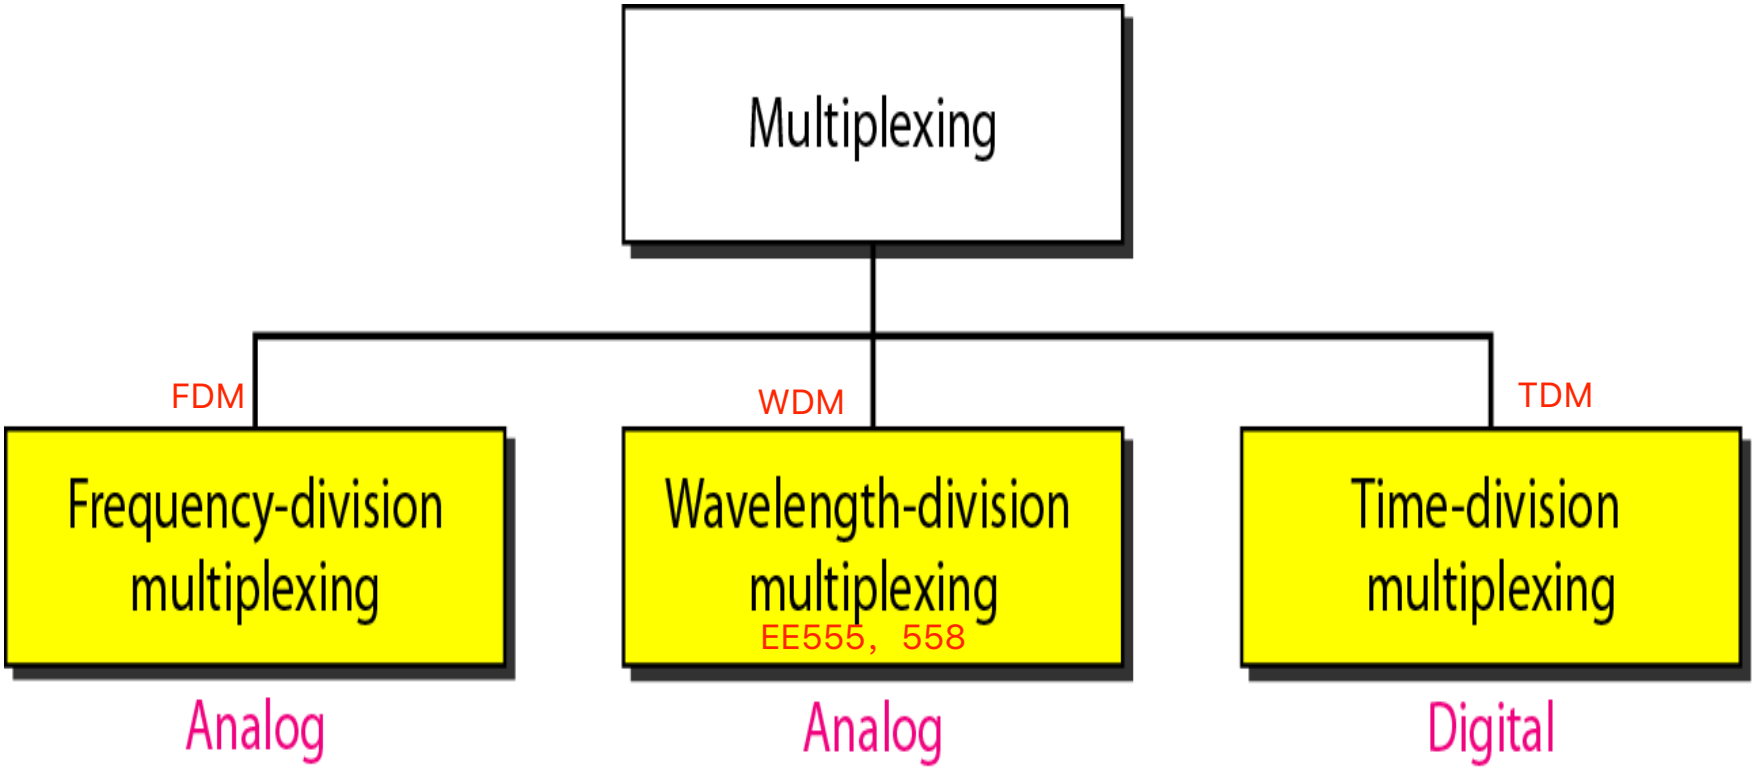

不重要，用于电话线路 Synchronous TDM

重要，用于internet Statistical TDM

信号overlap in time 但是不overlap in frequency

Frequency Division Multiplexing

- Useful bandwidth of medium exceeds required bandwidth of channel
- In FDM, each signal is modulated to a different carrier frequency
- Carrier frequencies separated so signals do not overlap (guard bands), example: Broadcast Radio

FDM Process

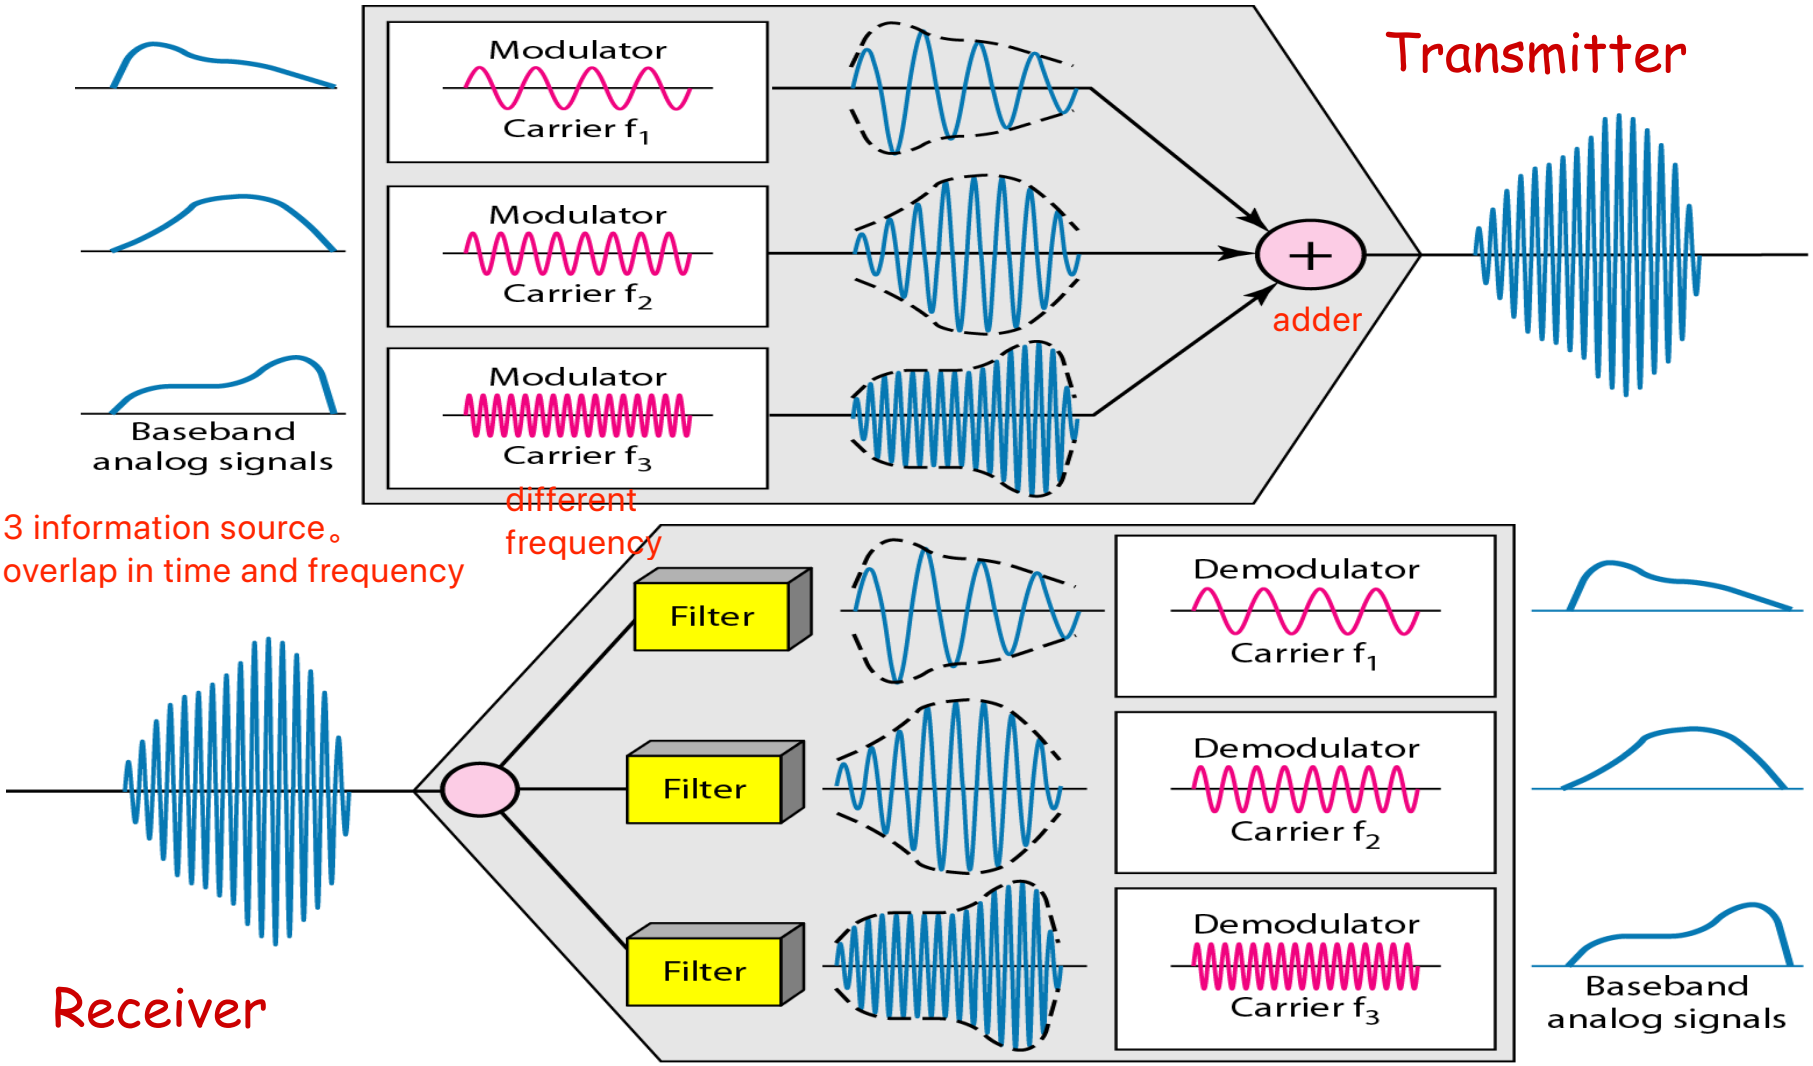
Transmitter
Modulator
Carrier f_1
Modulator
Carrier f_2
Modulator
Carrier f_3
adder
Baseband
analog signals
different
frequency
3 information source。
overlap in time and frequency
Receiver
Filter
Filter
Filter
Demodulator
Carrier f_1
Demodulator
Carrier f_2
Demodulator
Carrier f_3
Baseband
analog signals

Synchronous TDM

- Data rate of medium exceeds data rate of digital signal to be transmitted
- Multiple digital signals interleaved (one after another time) in time
- May be at bit level or block of bits
- Time slots pre-assigned to sources and fixed
- Time slots allocated even if source is idle (waste)
- Time slots do not have to be evenly distributed amongst sources (按data rate比例分配)

Synchronous TDM (Cont.)

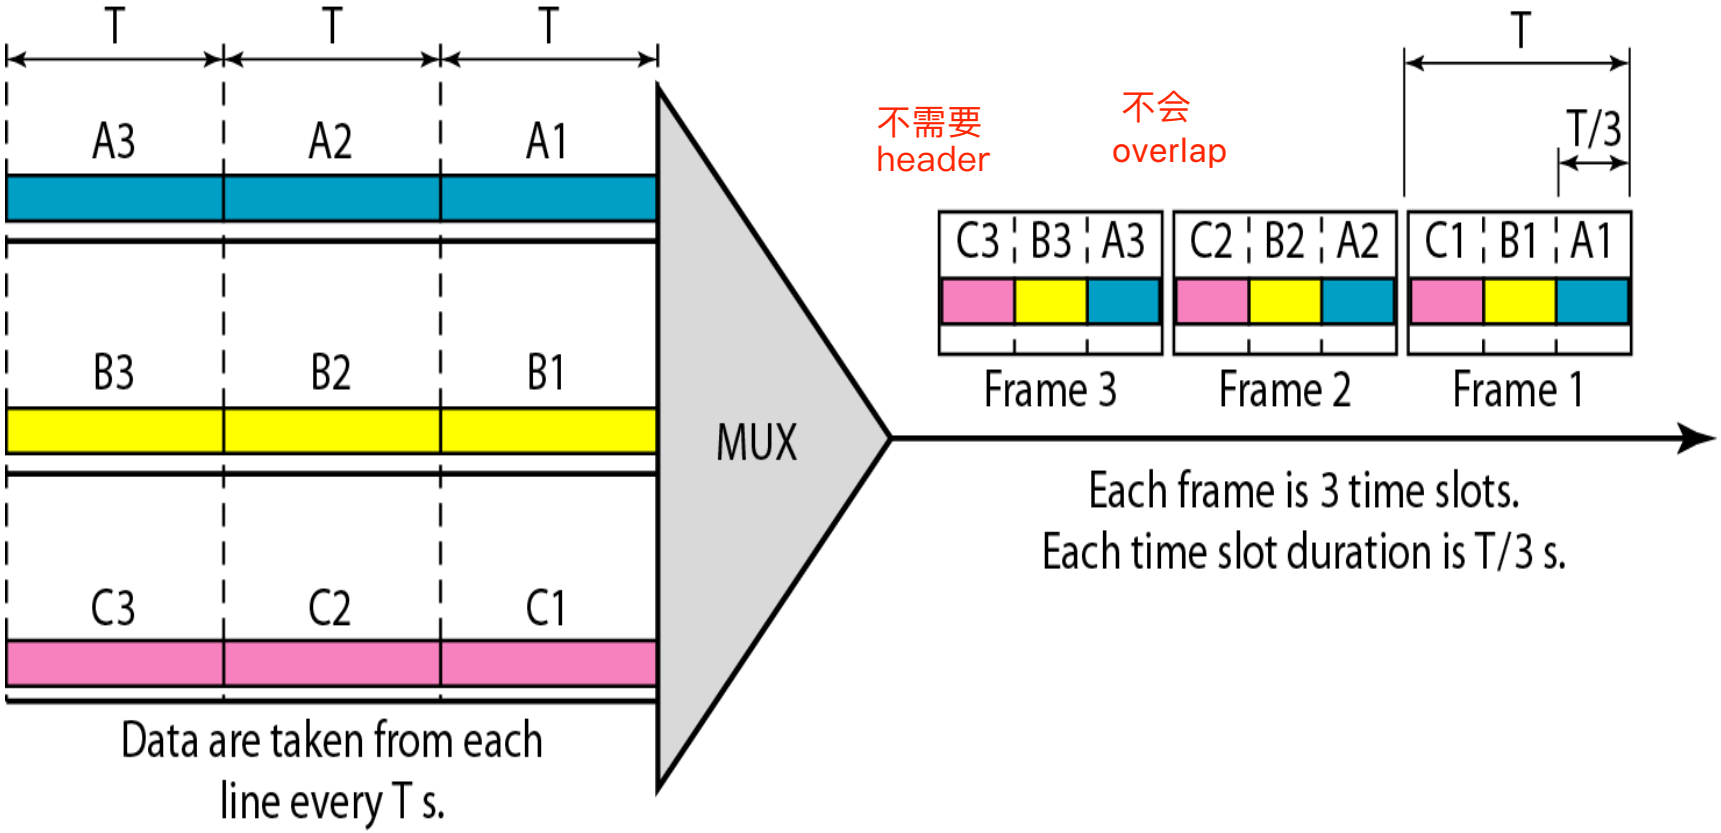

In synchronous TDM, the data rate of the link is *n* times faster, and the unit duration is *n* times shorter.

Synchronous TDM (Cont.)

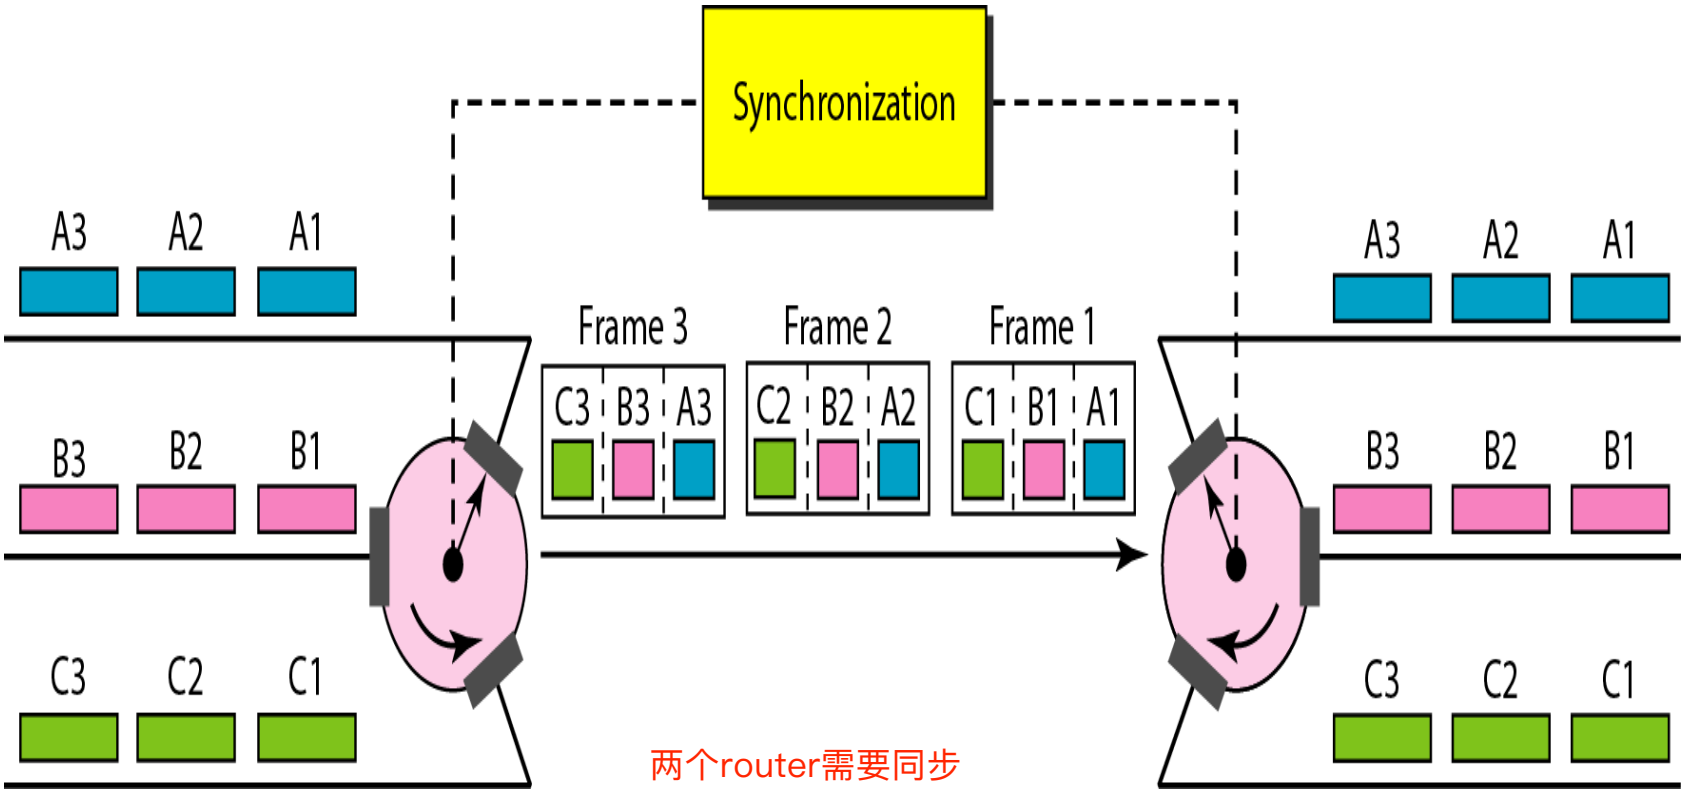

Empty Time Slots

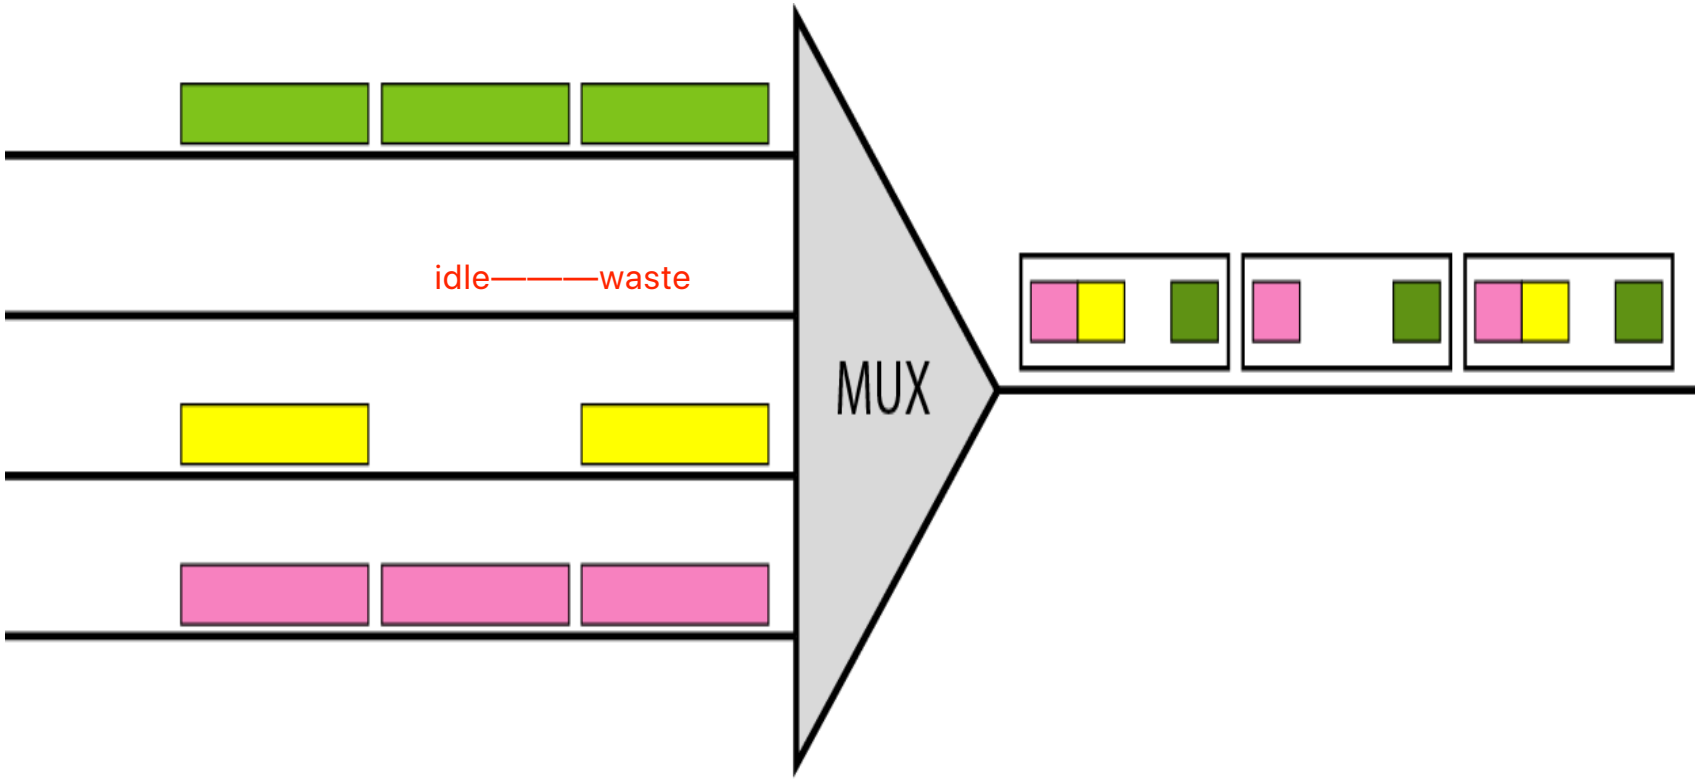

Empty TS can't be used by other Sources ⇒ Waste of Bandwidth

Multilevel Multiplexing

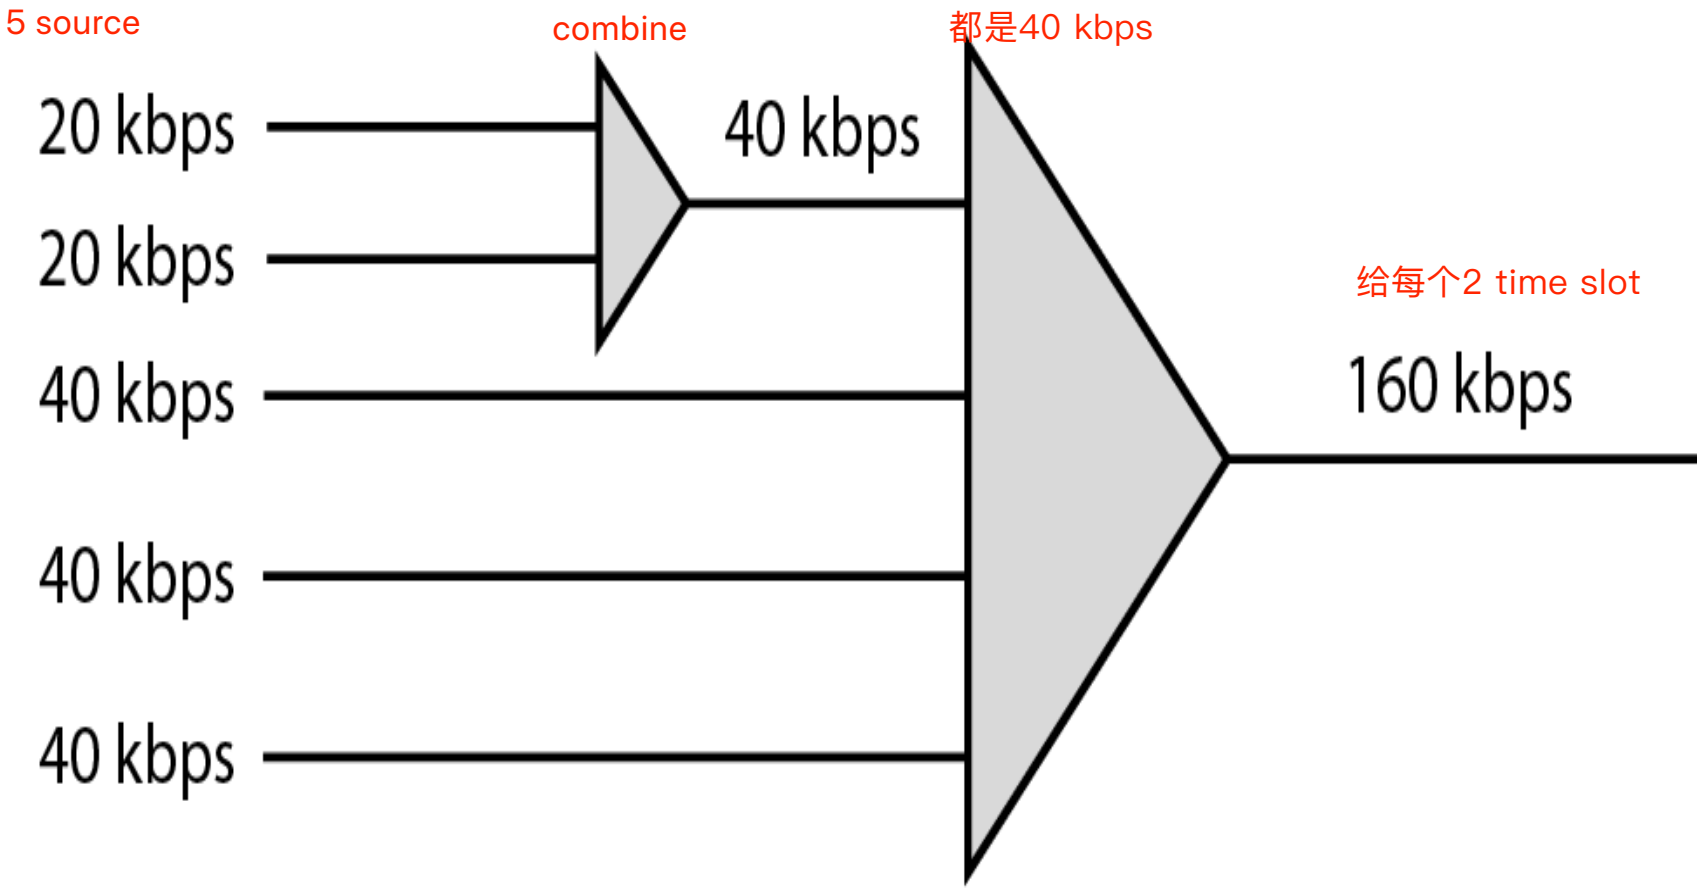

Multiple-Slot Multiplexing

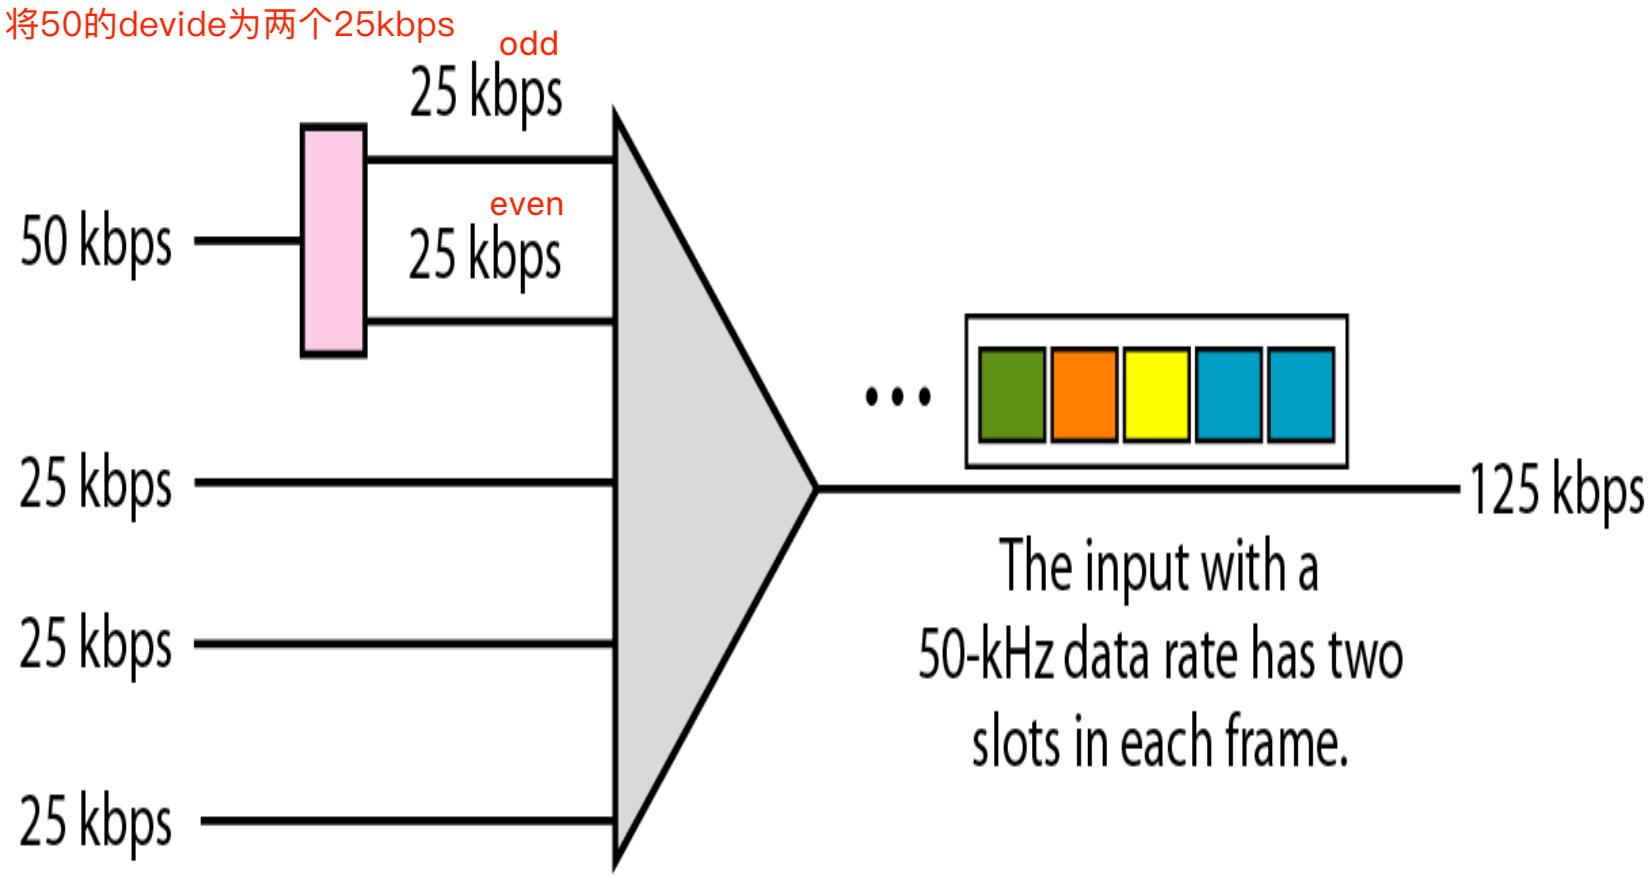

Statistical (Asynchronous) TDM

在bursty （data）traffic 效率很低， waste很多time slot

- In Synchronous TDM many slots are wasted
- Statistical TDM allocates time slots dynamically, i.e. based on demand
- Every Slot has to start with a header identifying the device (address)
- Multiplexer scans input lines and collects data until frame full
- Data rate on line lower than aggregate rates of input lines

Synchronous vs. Statistical

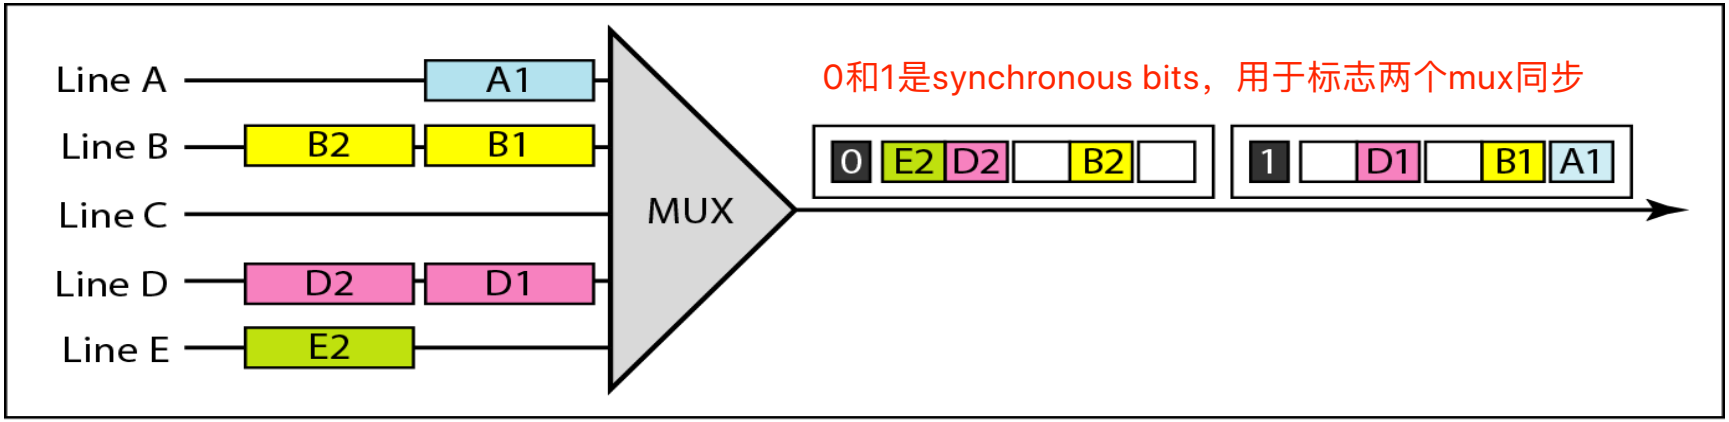

a. Synchronous TDM

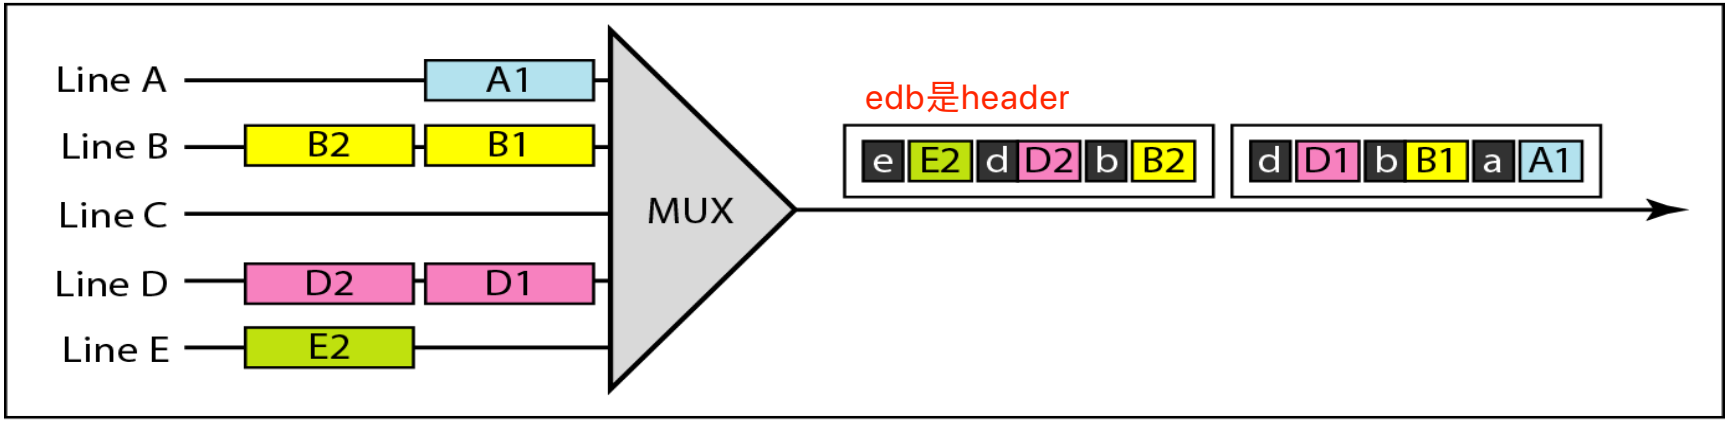

b. Statistical TDM

Performance of Statistical TDM

of Inputs = 10
Rate of each input (active) = 1000 bps
% of time a source is active = 50%
Case 1: Multiplexer capacity = 5000 bps
Case 2: Multiplexer capacity = 7000 bps

backlog: buffer pile up

	Capacity = 5000 bps		Capacity = 7000 bps	
Input	Output	Backlog	Output	Backlog
6	5	1	6	0
9	5	5	7	2
3	5	3	5	0
7	5	5	7	0
2	5	2	2	0
2	4	0	2	0
2	2	0	2	0
3	3	0	3	0
4	4	0	4	0
6	5	1	6	0
1	2	0	1	0
10	5	5	7	3
7	5	7	7	3
5	5	7	7	1
8	5	10	7	2
3	5	8	5	0

need to wait

Conclusions

最大64kbps

- TDM – Guarantees the User a bandwidth but on the contrary wastes valuable carrier capacity. Suitable for streamy type traffic like voice (digitized)
- STDM – Utilizes unused time slots. Suitable for Bursty-type traffic such as data
  - More efficient use of capacity
  - When times are busy, user suffers delay

λ = (speed of light) c/f

Wave-Length Division Multiplexing

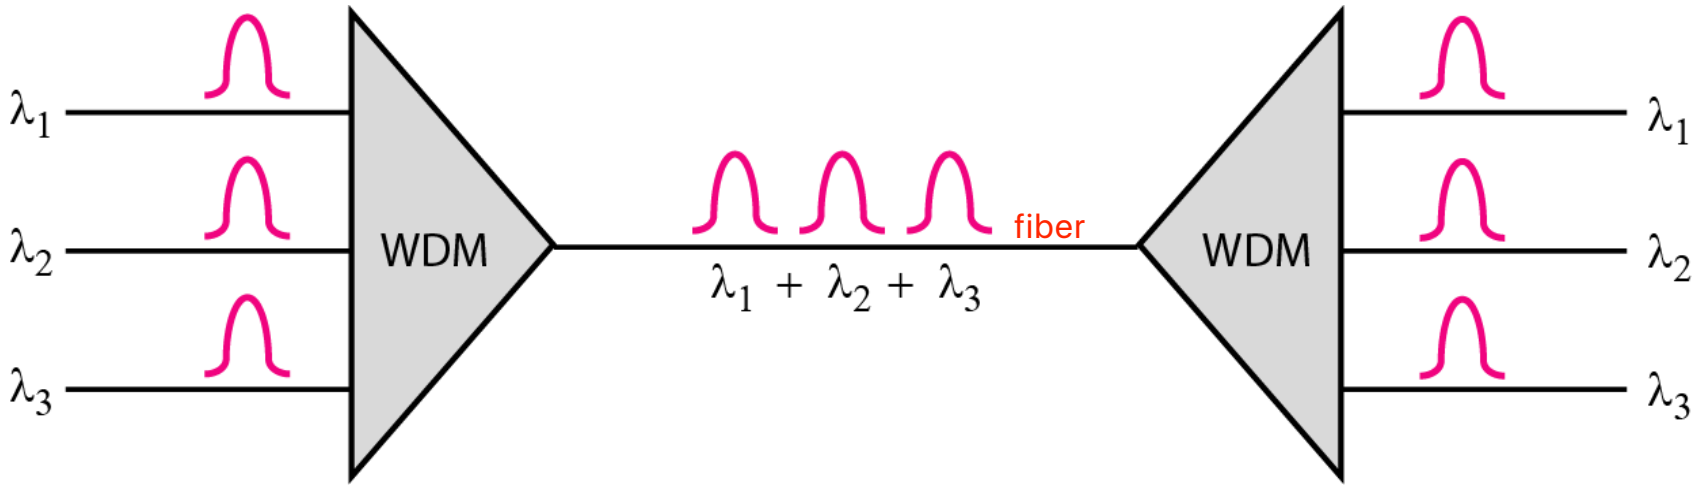

Prisms in wavelength-division multiplexing and de-multiplexing

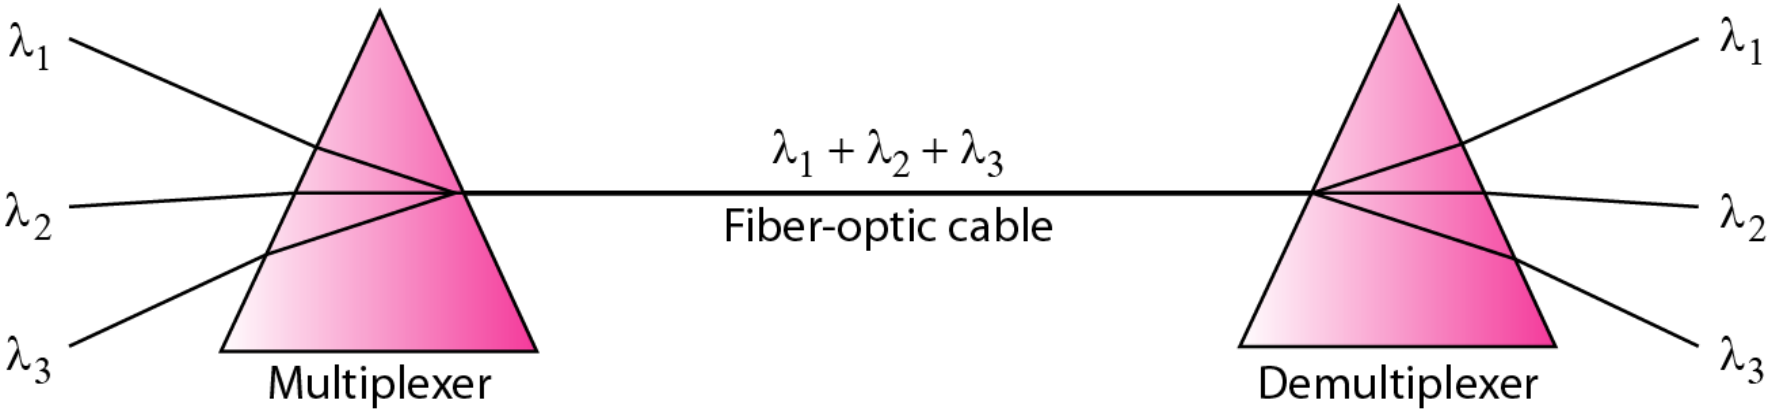

Residential Access Technologies

- Dial-up: 56 Kbps Modems
- ADSL : Asymmetric Digital Subscriber Line
- Broadband Cable Access
- Wireless Access

Dial-up Telephone Line Bandwidth

overlap in time and frequency：所以不能同时用data call和voice call

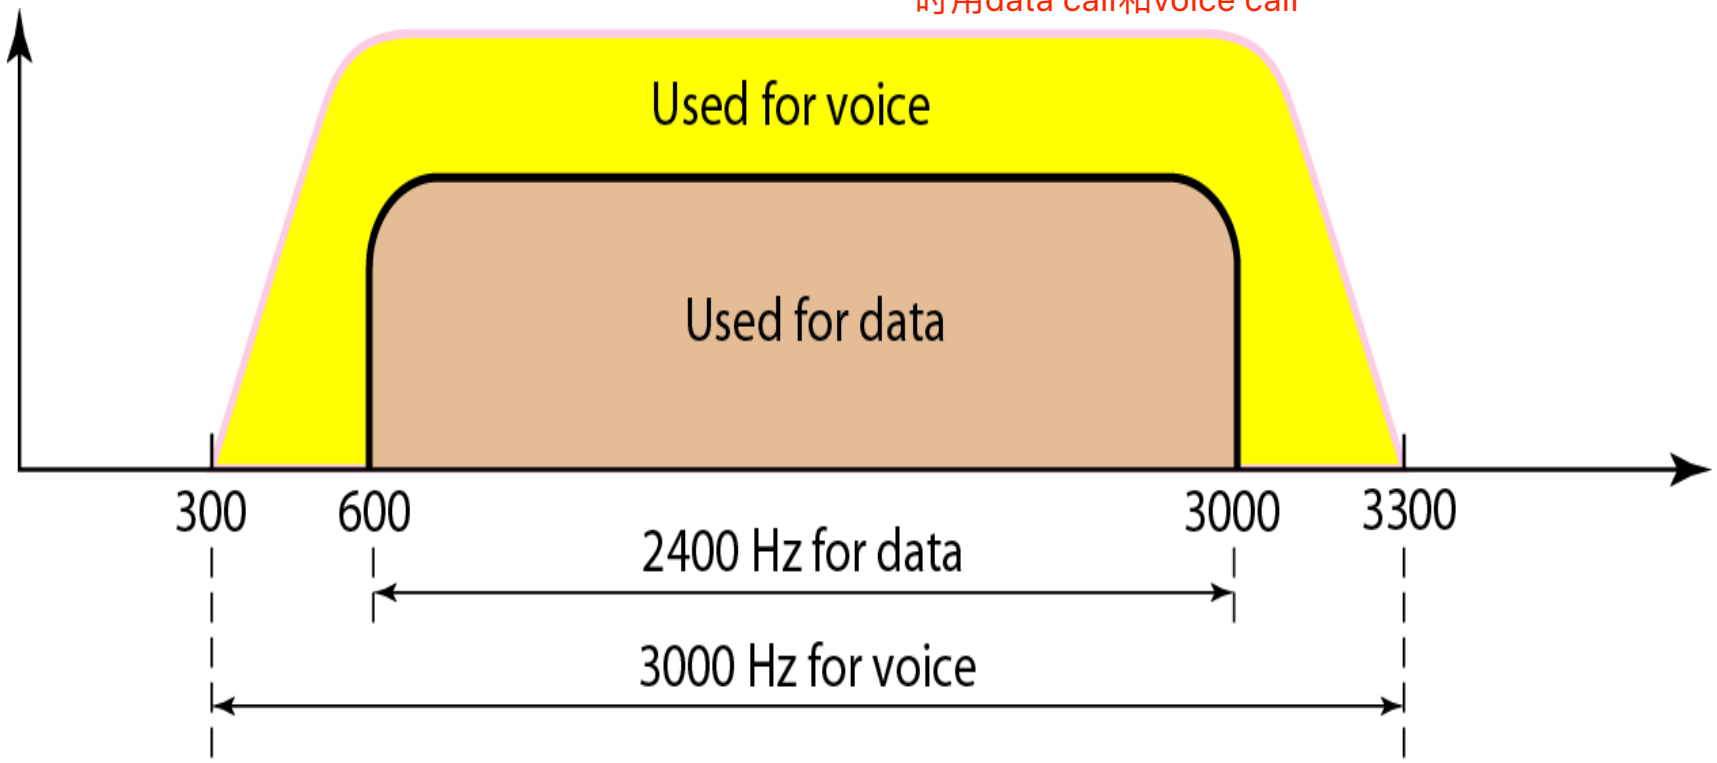

DSL Technologies

- Digital Subscriber Line is a technology that can provide Internet Access and Plain Old Telephone Services (POTS) over the existing single twisted pair telephone lines. It may also be able to deliver Video-on-Demand
- DSL is deployed by the telephone companies
- Multiple Flavors of DSL include:
  - ADSL : Asymmetric DSL (most suitable for residential access)
  - HDSL : High Data Rate DSL
  - IDSL : ISDN DSL
  - SDSL : Symmetric DSL
  - VDSL : Very High Data Rate DSL

ADSL

- Asymmetrical DSL was developed at BellCore in 1989. BellCore is currently Telcordia Tech. Inc.
- Asymmetric in the sense that the Downstream and the Upstream capabilities are not the same. It was designed to match the flow of data to and from the Internet
  - Downstream bandwidth supports up to ~ 8 Mbps
  - Upstream bandwidth supports up to ~ 1.5 Mbps
- Distance requirement between residence and the CO is ~ 18,000 ft (~ 5.5 km), the closer, the better, the higher

ADSL Bandwidth Allocations

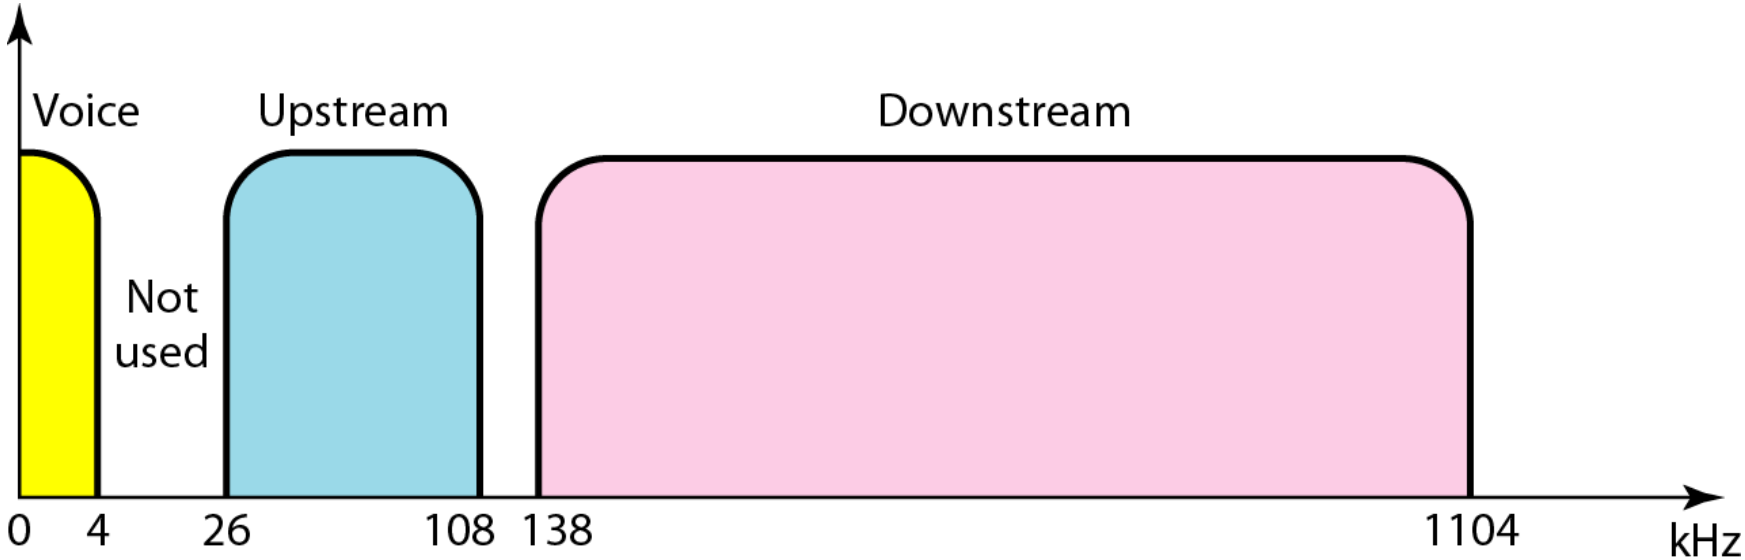

1Mhz
很小的带宽，不能支持视频

The bandwidth of the twisted pair copper wire is divided, using FDM (Frequency Division Multiplexing) into 3 non-overlapping sub-bands

ADSL Architecture

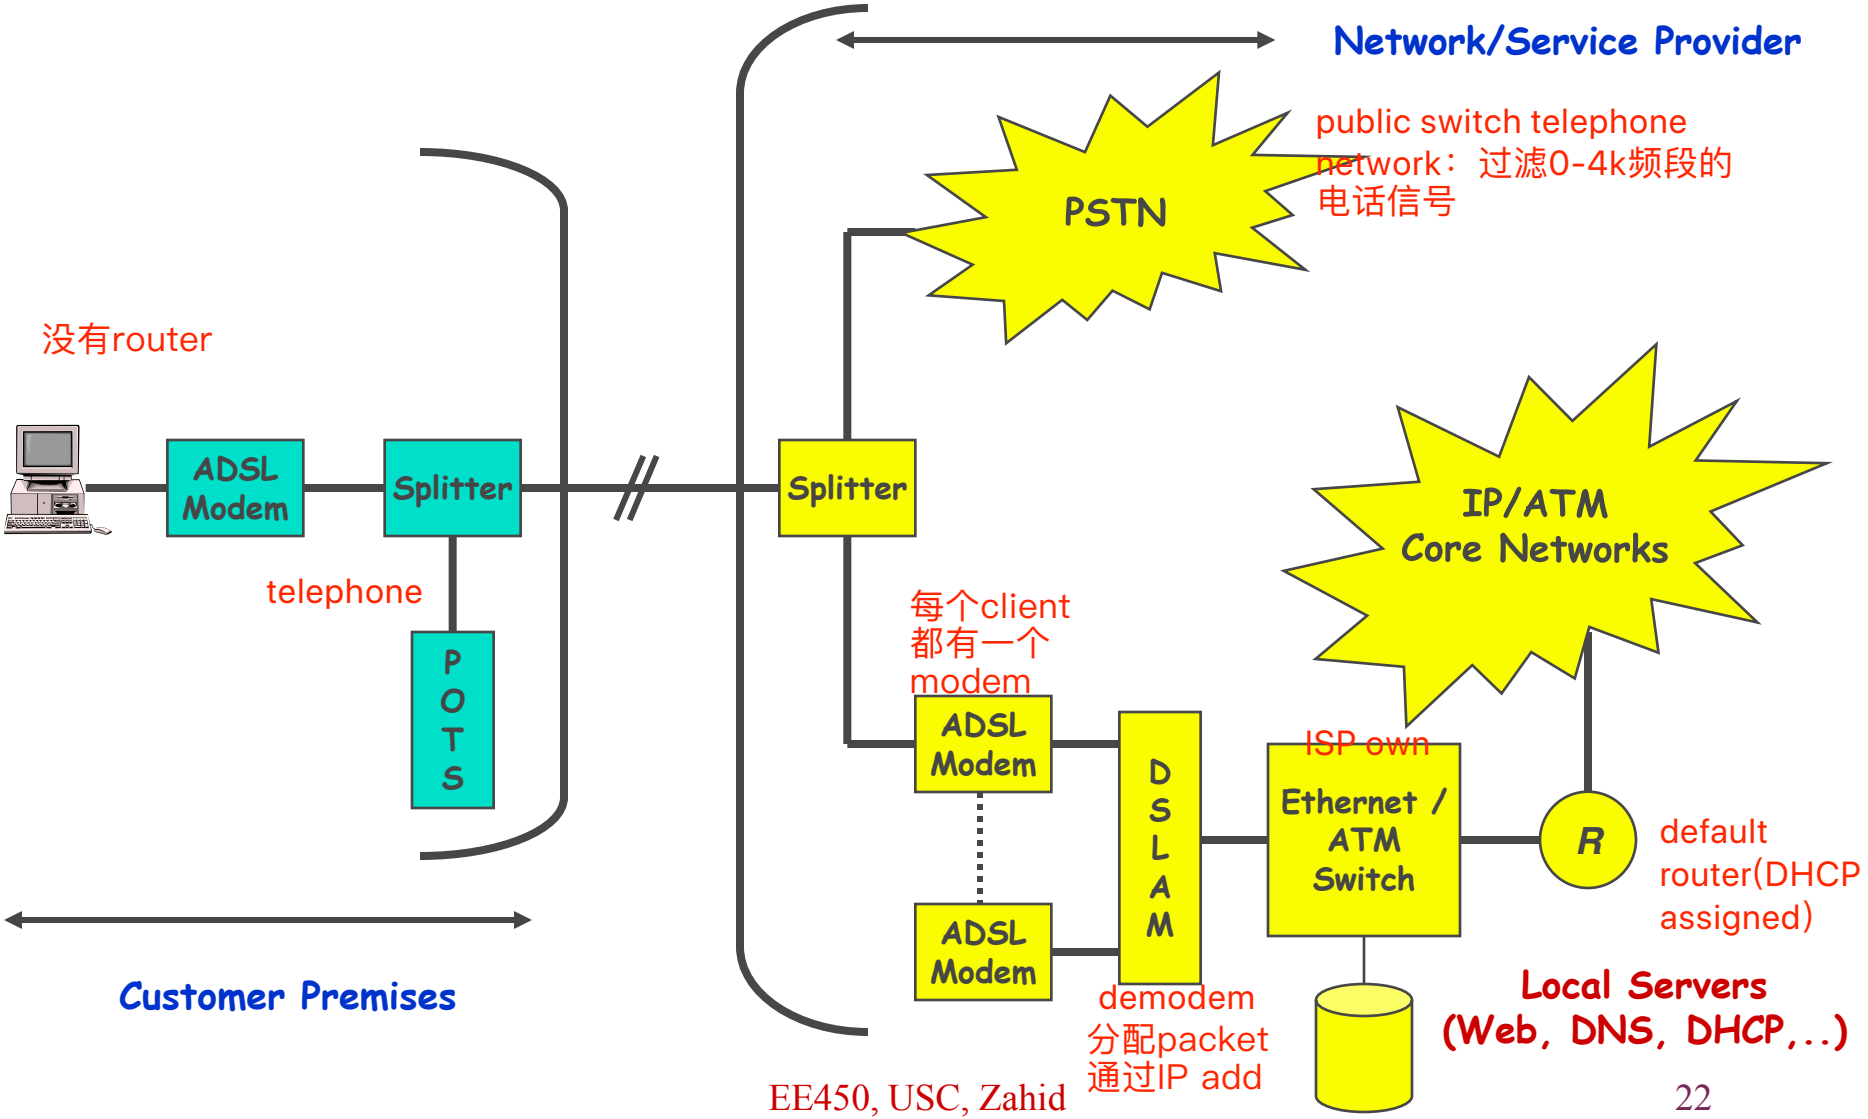

Customer Premises Installation

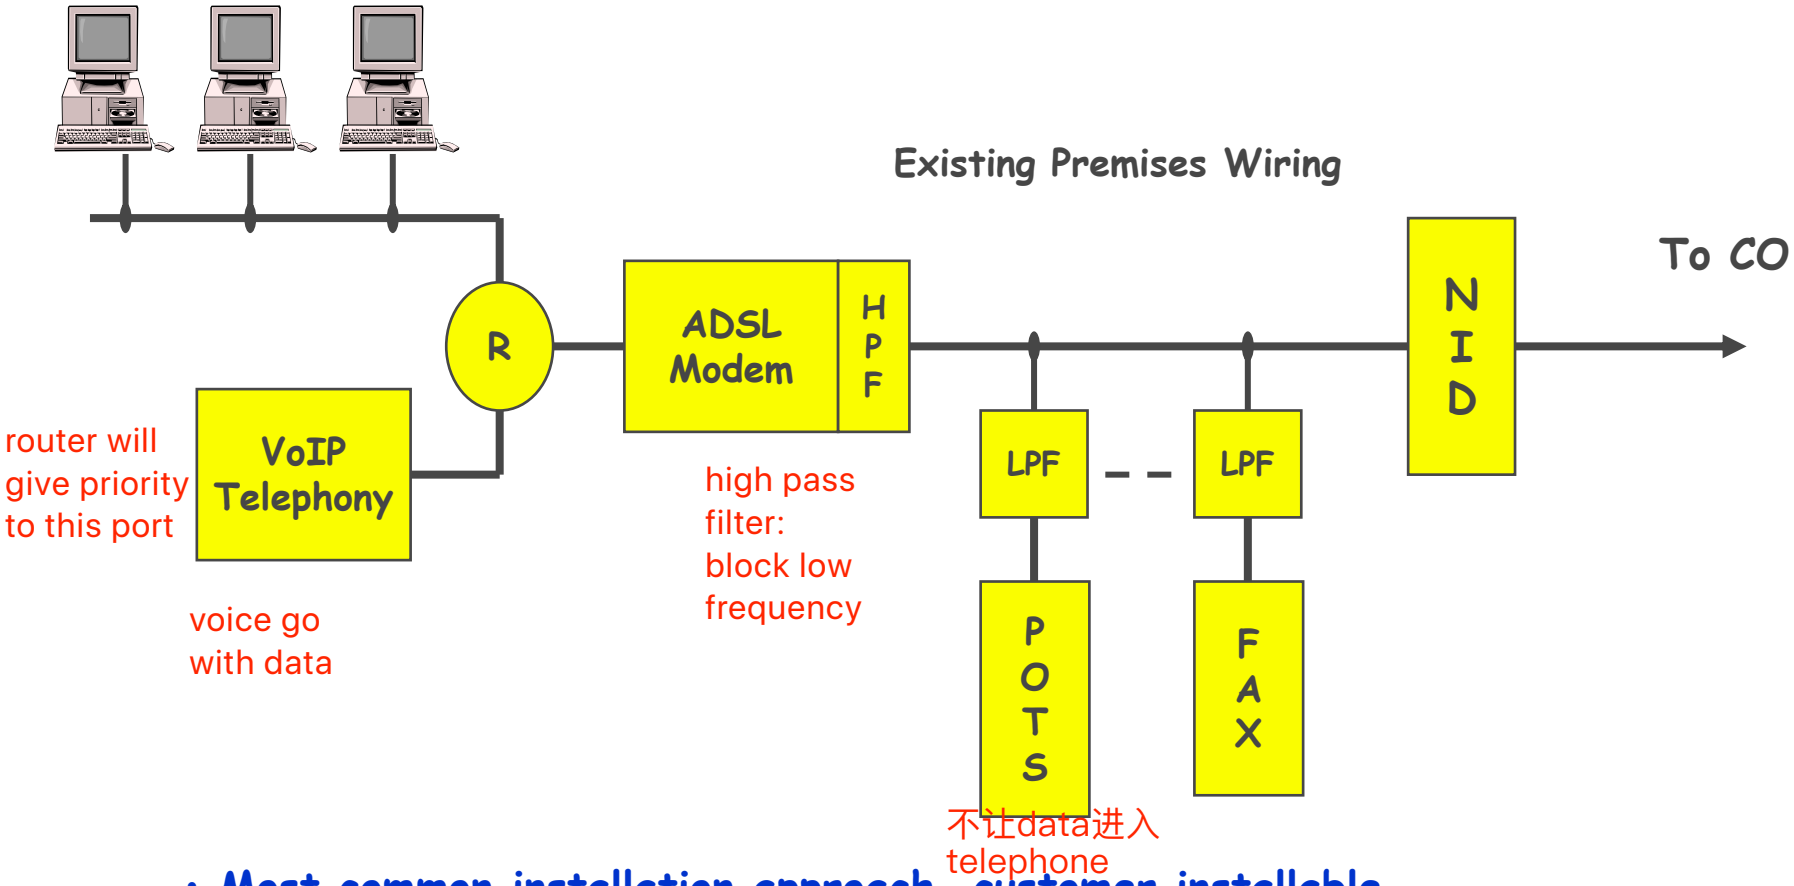

- Most common installation approach, customer installable
- Requires "Miniatures" LPFs between the POTS device and the wall jack

Cable Access

- Based on (residential) cable television (CATV) technology
  - 80~100 million homes are "Passed" by CATV in USA
- Provide for Integrated Services
  - Data
  - TV Broadcasting (Analog & Digital), VoD
  - Audio (music, voice)
- Asymmetric Bandwidth Allocation
  - High-speed D/L
  - Low-speed U/L
- Always ON!

Traditional Cable TV Network

one-way

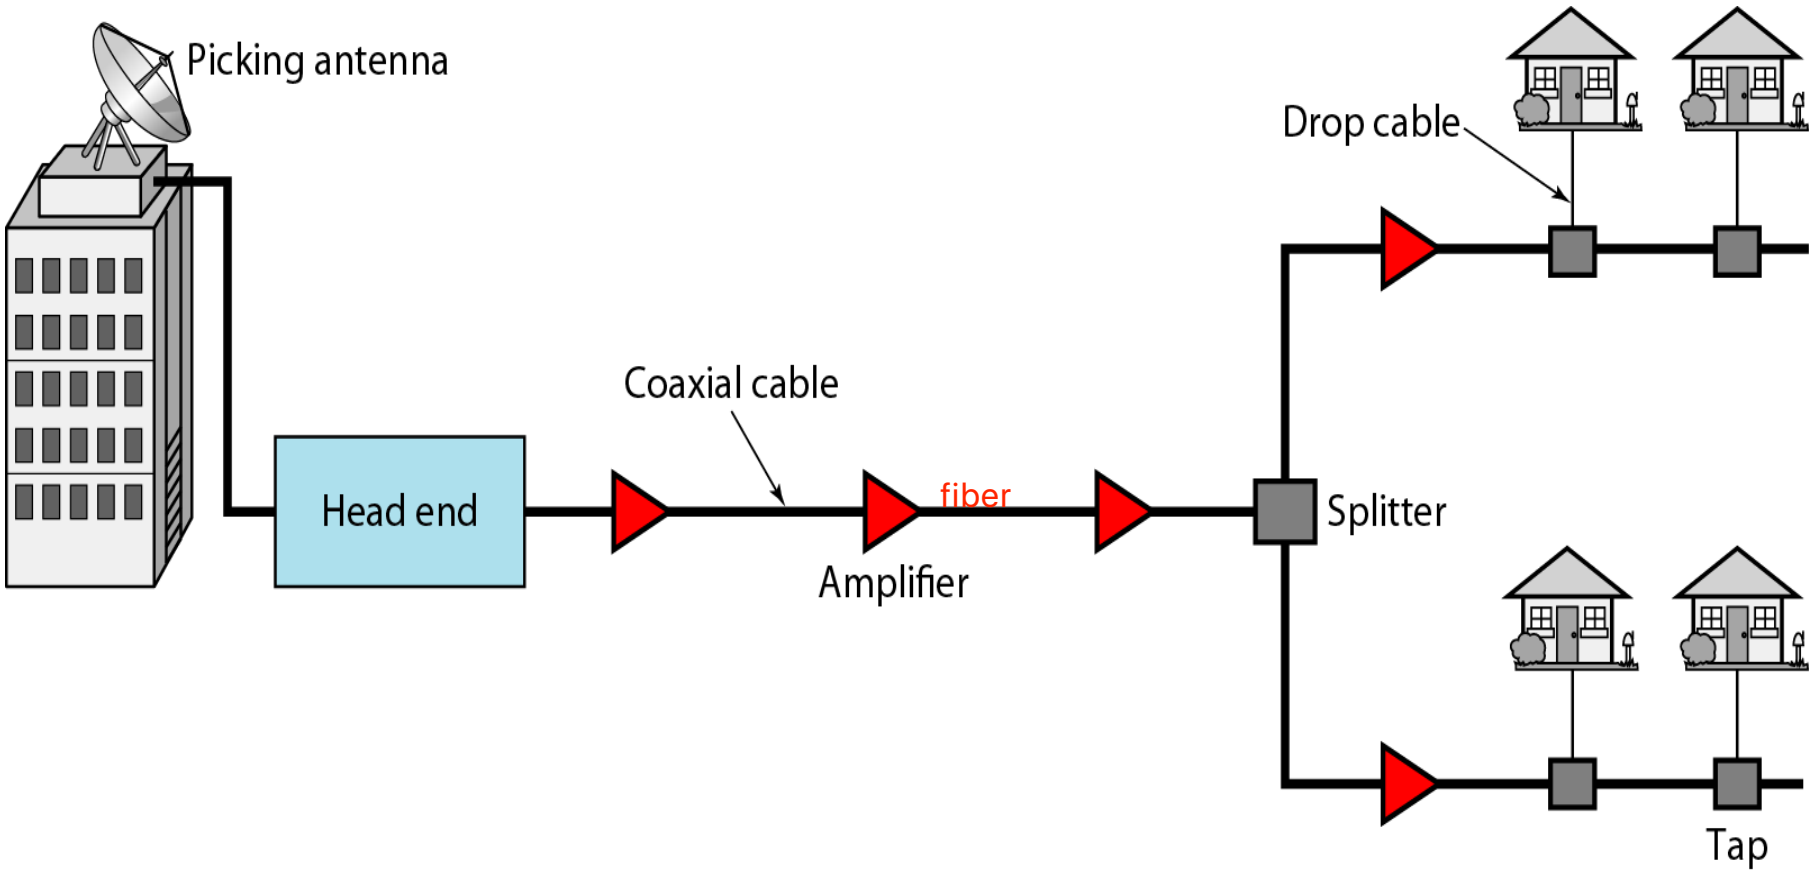

mixture

Hybrid/Fiber Cable (HFC)

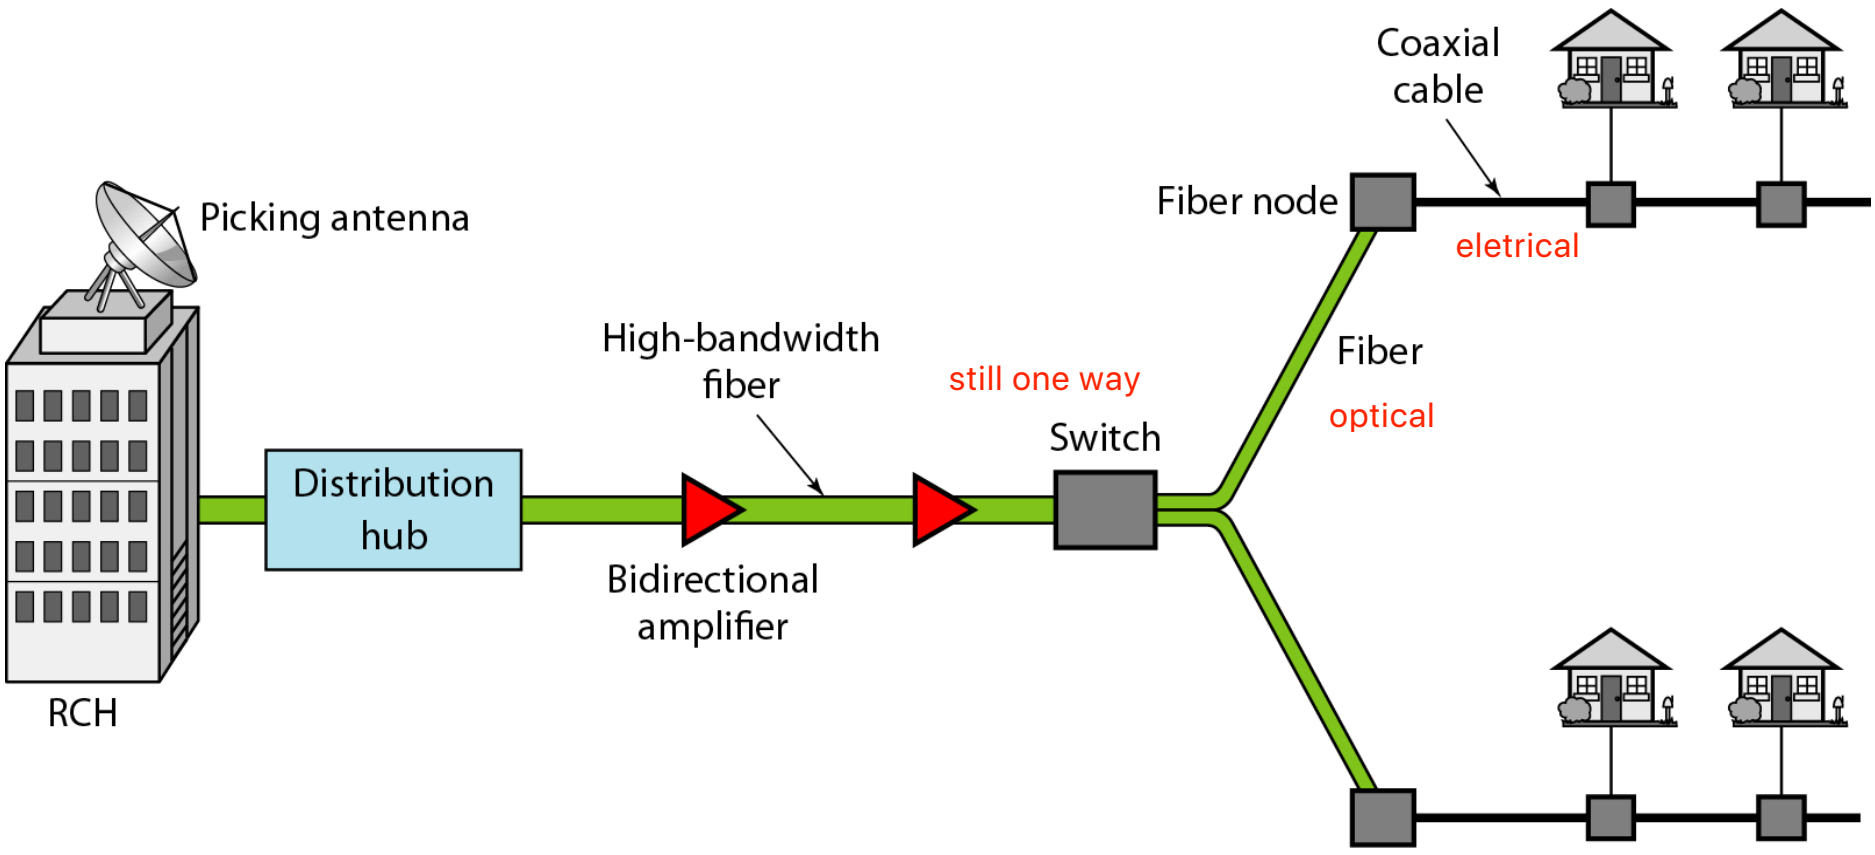

One-way HFC Architecture

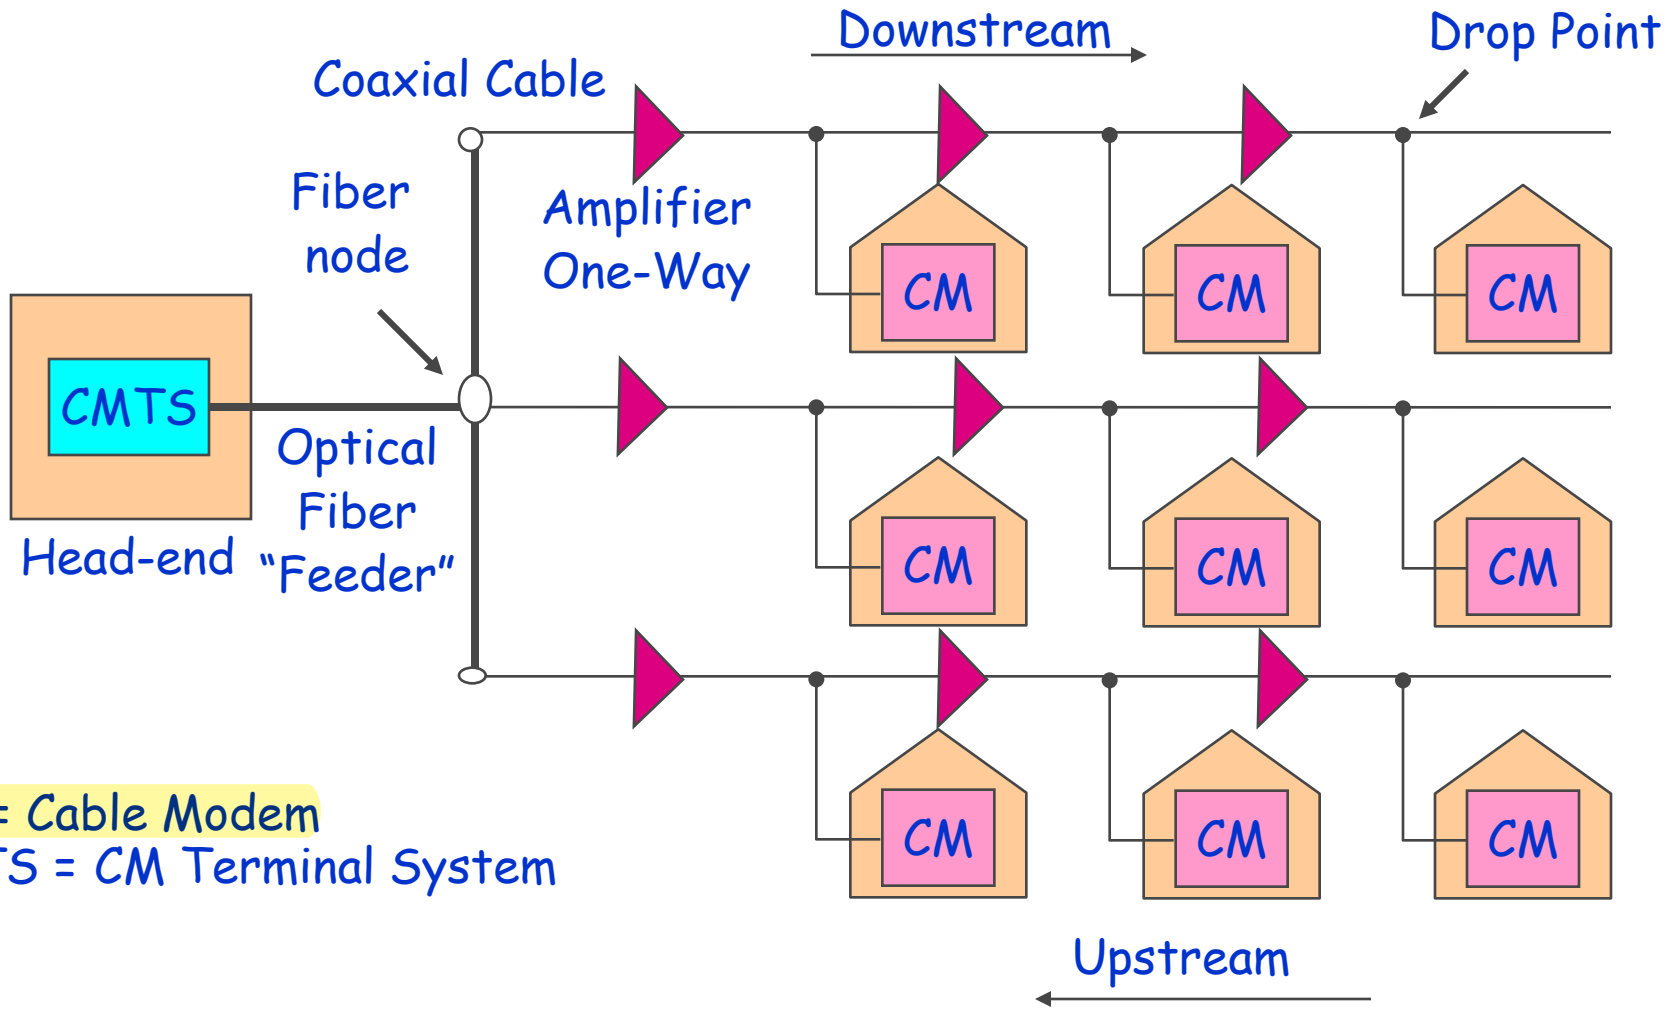

CM = Cable Modem
CMTS = CM Terminal System

Cable Bandwidth Allocations

up-link:from customer to cable

U/L Channels
2 MHz each

down-link:from the cable company to the custom

D/L TV Broadcasting
6 MHz each

down link in data and video, share in time

D/L Data & VoD
6 MHz each

video on demand(vod)

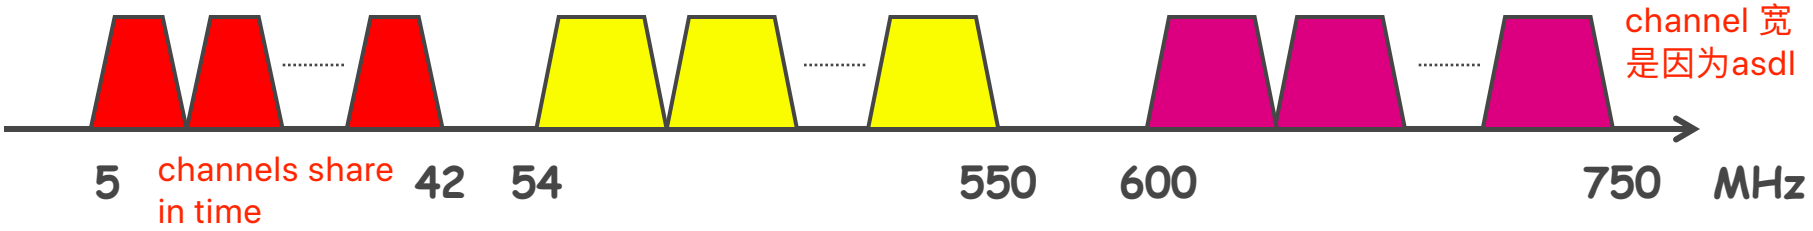

- Currently, the band from 54MHz to 550 MHz is used for Analog TV broadcasting
  - * Each Analog Channel is 6 MHz wide ⇒ 80~85 Channels
- D/L Channels in the band 600~750 MHz band is used for Internet Data and VoD
  - * Each Digital Channel is 6 MHz wide. Data is Modulated using 64-QAM
  - * Each Channel can support 6 bps/Hz ⇒ Each Channel can support ~ 36 Mbps
  - * With FEC and Channel Separation, each Channel can support 27~30 Mbps
- U/L Channels in the band 5~42 MHz band is used for Data/Voice/VoIP
  - * Each Digital Channel is 2 MHz wide. Data is Modulated using QPSK
  - * Each Channel can support 2 bps/Hz ⇒ Each Channel can support ~ 4 Mbps
  - * U/L Channels are shared. Users may compete for the same Channel

shared in time, more users, less share

Two-Way Cable Access