DOORTRONIX, INC
5783 C.R. 1219
MALAKOFF, TX 75148
TEL: 888-453-5196
FAX: 888-579-4639
www.doortronix.com
THE NEXT GENERATION OF AUTOMATIC DOORS


DOORTRONIX LINEAR BEARING 2100 SERIES

SX - SO


SINGLE SLIDE RIGHT HAND FULL BREAKOUT

PROJECT INFORMATION

PROJECT NAME:	
LOCATION:	
DOOR NUMBERS:	
DATE:	SHEET: OF

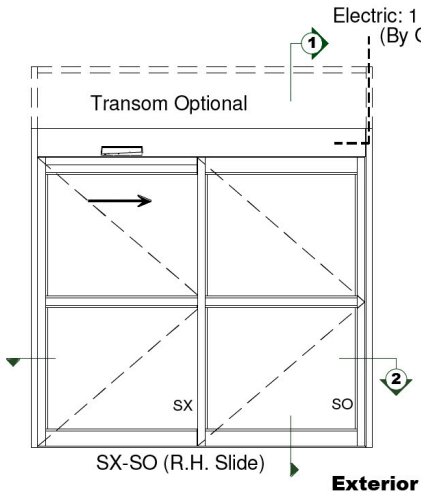


Exterior Elevation

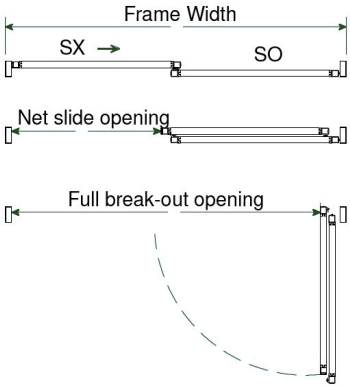


Note:

All Panels Are Capable Of Breakout From Any Position Of Travel

Elevations & floor plans
Exterior View

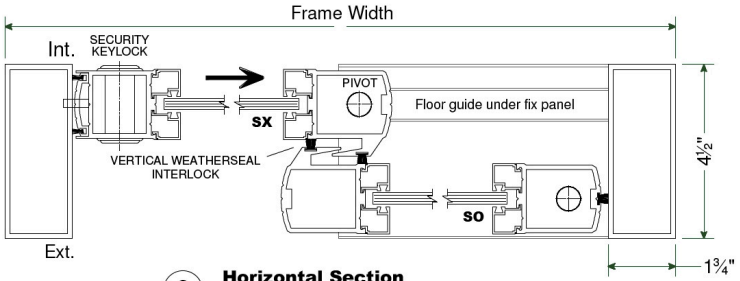

2 **Horizontal Section**
Type SX - SO

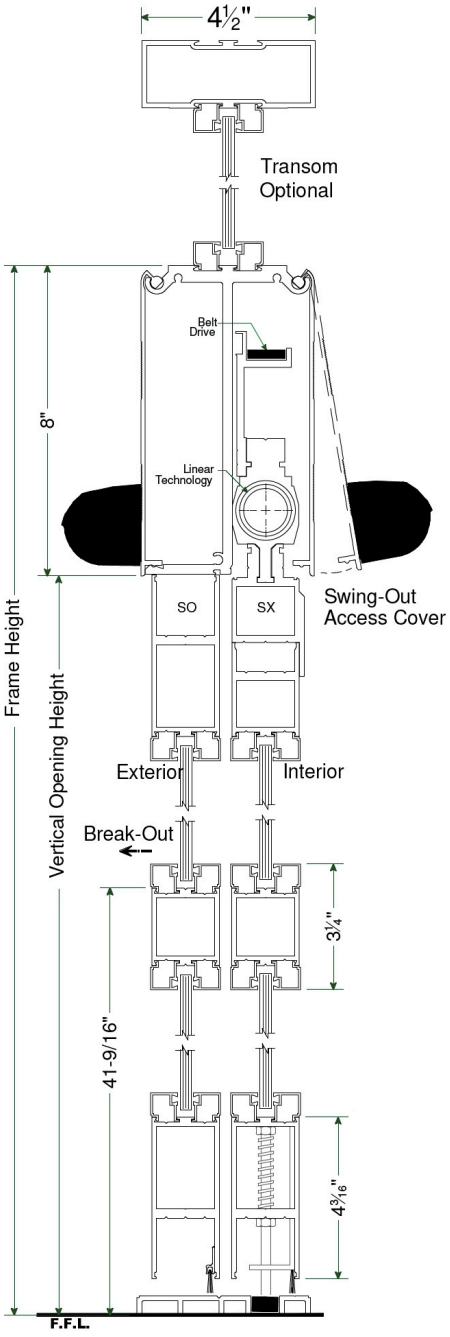

Adjustable bottom brushes
optional sill conditions available

1 **Vertical Section**

NOTES
1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

Model	Frame Widh	Frame Height	Clear Door Opening	Vertical Opening	Full Breakout Opening	Rough Opening Width	Rough Opening Height
SX-SO	6'-6" (1981)	90" (2286)	33" (838)	82" (2083)	69" (2083)	78 -1/2" (1753)	90 -1/2" (2299)
SX-SO	7'-0" (2134)	90" (2286)	36" (915)	82" (2083)	75" (1829)	84 -1/2" (2146)	90 -1/2" (2299)
SX-SO	8'-0" (2438)	90" (2286)	42" (1067)	82" (2083)	87" (2137)	96 -1/2" (2451)	90 -1/2" (2299)
SX-SO	9'-0" (2743)	90" (2286)	48" (1219)	82" (2083)	99" (2438)	108 -1/2" (2756)	90 -1/2" (2299)

*Imperial (Metric - mm) - Consult Factory For Custom Sizes

REVISION: 08/15/2016