


Admin

Lab 1, Assign 1

We're off and running!

Check in

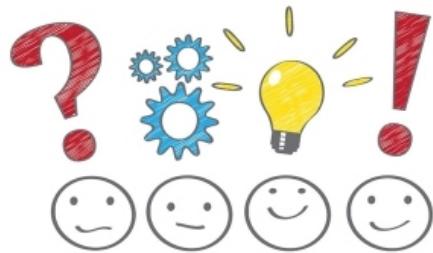

Today: From Assembly to C (and back again)


ARM condition codes, branch instructions

C language as “high-level” assembly


What does a compiler do?

Makefiles

Operand 2 is special

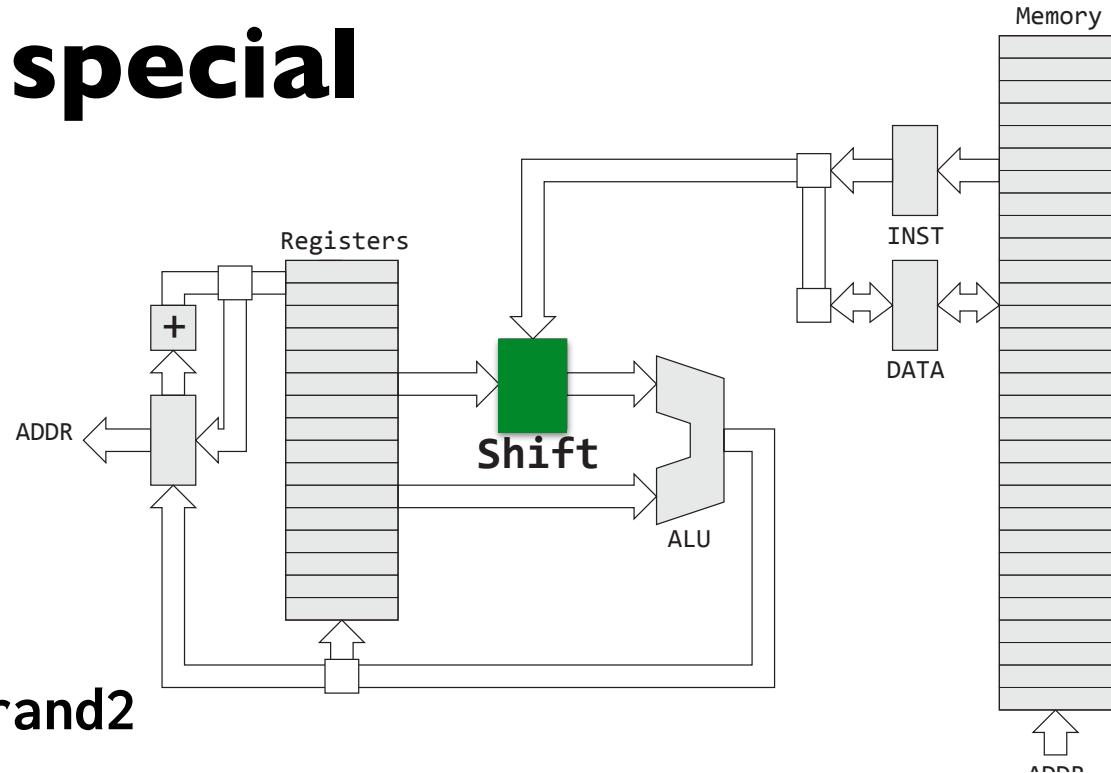

Dest = Operand1 op Operand2

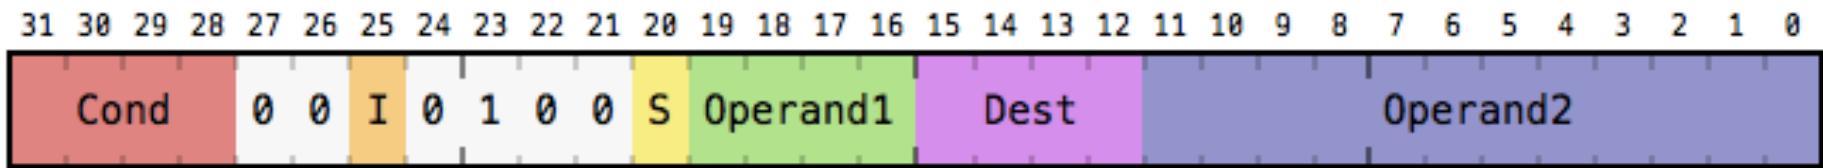


add r0, r1, #0x1f000

sub r0, r1, #6

rsb r0, r1, #6

add r0, r1, r2, lsl #3

mov r1, r2, ror #7

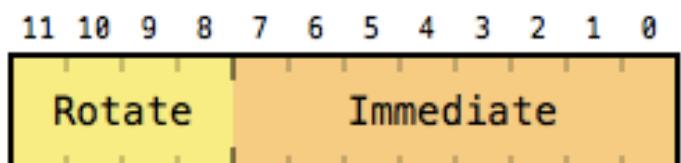

lsl, lsr, asr, ror

Control flow

Instructions stored in contiguous memory

Register pc (r15) tracks address in memory where instructions are being read

Default is "straight-line" code: next instruction to execute is at next higher memory address ($pc = pc + 4$)

Change pc to change which instruction is next, branch instruction has effect of $pc = \text{target}$

b target

Above branch is unconditional (always taken), alternative is predicated on state of "condition codes"

Condition Codes

- Z result was 0
- N result was < 0
- C operation generated carry
- V operation had arithmetic overflow

(More on carry and overflow in later lecture...)

Which instructions set/clear codes?

cmp (like **sub**, but discards result)

tst (like **and**, but discards result)

Any data processing instruction suffixed with **s**:

adds **movs** **orrs** **lsrs** ...

s bit
(if on, instr will set condition codes)



Code	Suffix	Description	Flags
0000	EQ	Equal / equals zero	Z
0001	NE	Not equal	!Z
0010	CS / HS	Carry set / unsigned higher or same	C
0011	CC / LO	Carry clear / unsigned lower	!C
0100	MI	Minus / negative	N
0101	PL	Plus / positive or zero	!N
0110	VS	Overflow	V
0111	VC	No overflow	!V
1000	HI	Unsigned higher	C and !Z
1001	LS	Unsigned lower or same	!C or Z
1010	GE	Signed greater than or equal	N == V
1011	LT	Signed less than	N != V
1100	GT	Signed greater than	!Z and (N == V)
1101	LE	Signed less than or equal	Z or (N != V)
1110	AL	Always (default)	any

Branch instructions

b target

bne target

bmi target


bge target

...

branch reads condition codes, as set by a previous instruction

If specific condition satisfied, branch is taken, $pc = \text{target}$
otherwise falls through, $pc = pc + 4$

Conditional execution

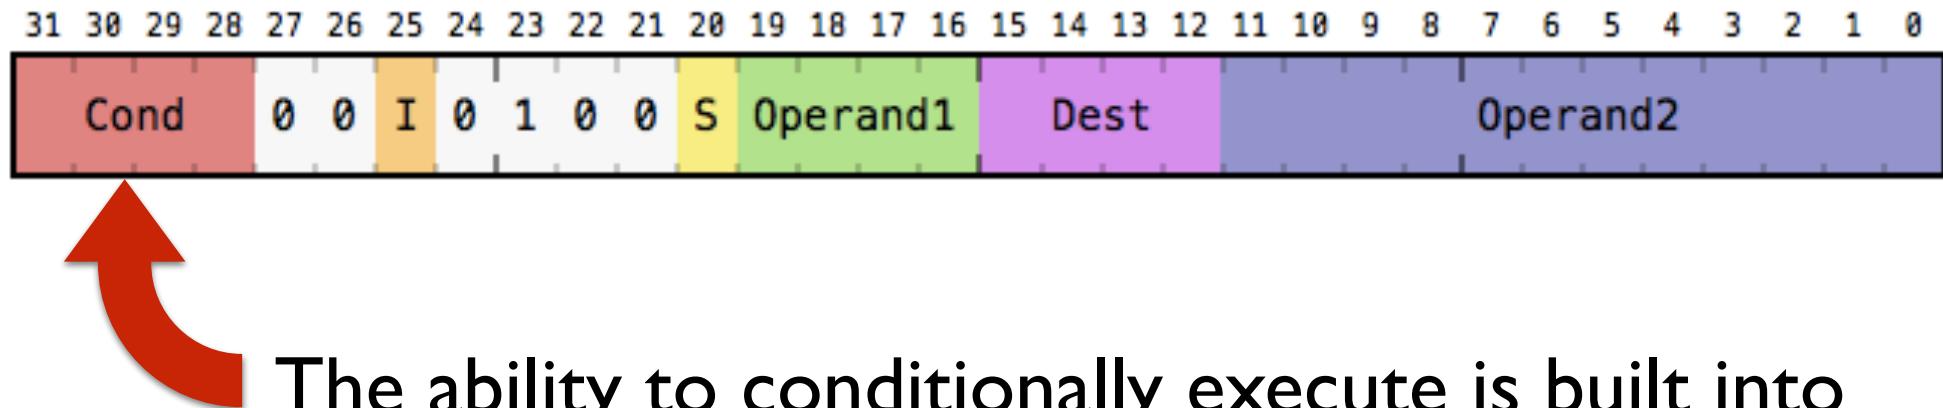

The ability to conditionally execute is built into all ARM instructions! (not just branch...)

```
addeq r0, r0, #3  
submi r1, r2, r3
```

Q: Given our earlier foray into machine-encoded instructions, what do you suspect is the condition represented by 0xe?

Challenge for you all:

Write an assembly program to count the "on" bits in a given numeric value

```
mov r0, #val  
mov r1, #0  
  
// r0 holds input value  
// use r1 to store count of on bits in value
```

VisUAL ARM Emulator

The screenshot shows the VisUAL ARM Emulator interface. At the top, there is a toolbar with buttons for New, Open, Save, Settings, Tools, Emulation Complete (with Line Issues 9 0), Execute, Reset, Step Backwards, and Step Forwards.

The main area displays assembly code:

```
1      mov    r0, #0x3a
2      mov    r1, #0
3
4
5      loop
6      tst    r0, #1
7      addne r1, r1, #1
8      lsrs   r0, r0, #1
9      bne    loop
10
11
12
13
14
15
16
17
18
19
20
```

A message "Reset to continue editing code" is displayed above the assembly code.

To the right, a register table shows the values for R0 through R12:

R0	0x0	Dec	Bin	Hex
R1	0x4	Dec	Bin	Hex
R2	0x0	Dec	Bin	Hex
R3	0x0	Dec	Bin	Hex
R4	0x0	Dec	Bin	Hex
R5	0x0	Dec	Bin	Hex
R6	0x0	Dec	Bin	Hex
R7	0x0	Dec	Bin	Hex
R8	0x0	Dec	Bin	Hex
R9	0x0	Dec	Bin	Hex
R10	0x0	Dec	Bin	Hex
R11	0x0	Dec	Bin	Hex
R12	0x0	Dec	Bin	Hex

At the bottom, there are status indicators for Clock Cycles (1 Total: 36) and CSPR Status Bits (NZCV) with values 0 1 1 0.

<https://salmanarif.bitbucket.io/visual/>

ISA design is an art form!

Some neat things about ARM design

Commonalities across operations

Register vs. immediate operands

Use of barrel shifter

All registers treated same (with a few caveats)

Predicated execution

Set condition code (or not)

Orthogonality leads to composability

Why assembly?

What you see is what you get

No surprises

Precise control, timing

Unfettered access to hardware

But... tedious, hard to read, hardware-specific

Why C?

More concise

Easier to read


Can name variables and structures

Type-checking

More portable, architecture-neutral

Functions

Real question is not whether to use assembly, but when...

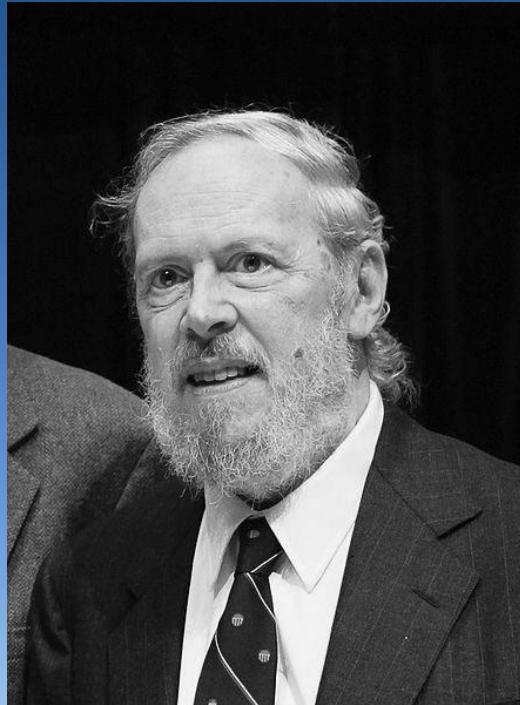

Dennis Ritchie

SECOND EDITION


THE



**PROGRAMMING
LANGUAGE**

BRIAN W. KERNIGHAN
DENNIS M. RITCHIE

PRENTICE HALL SOFTWARE SERIES

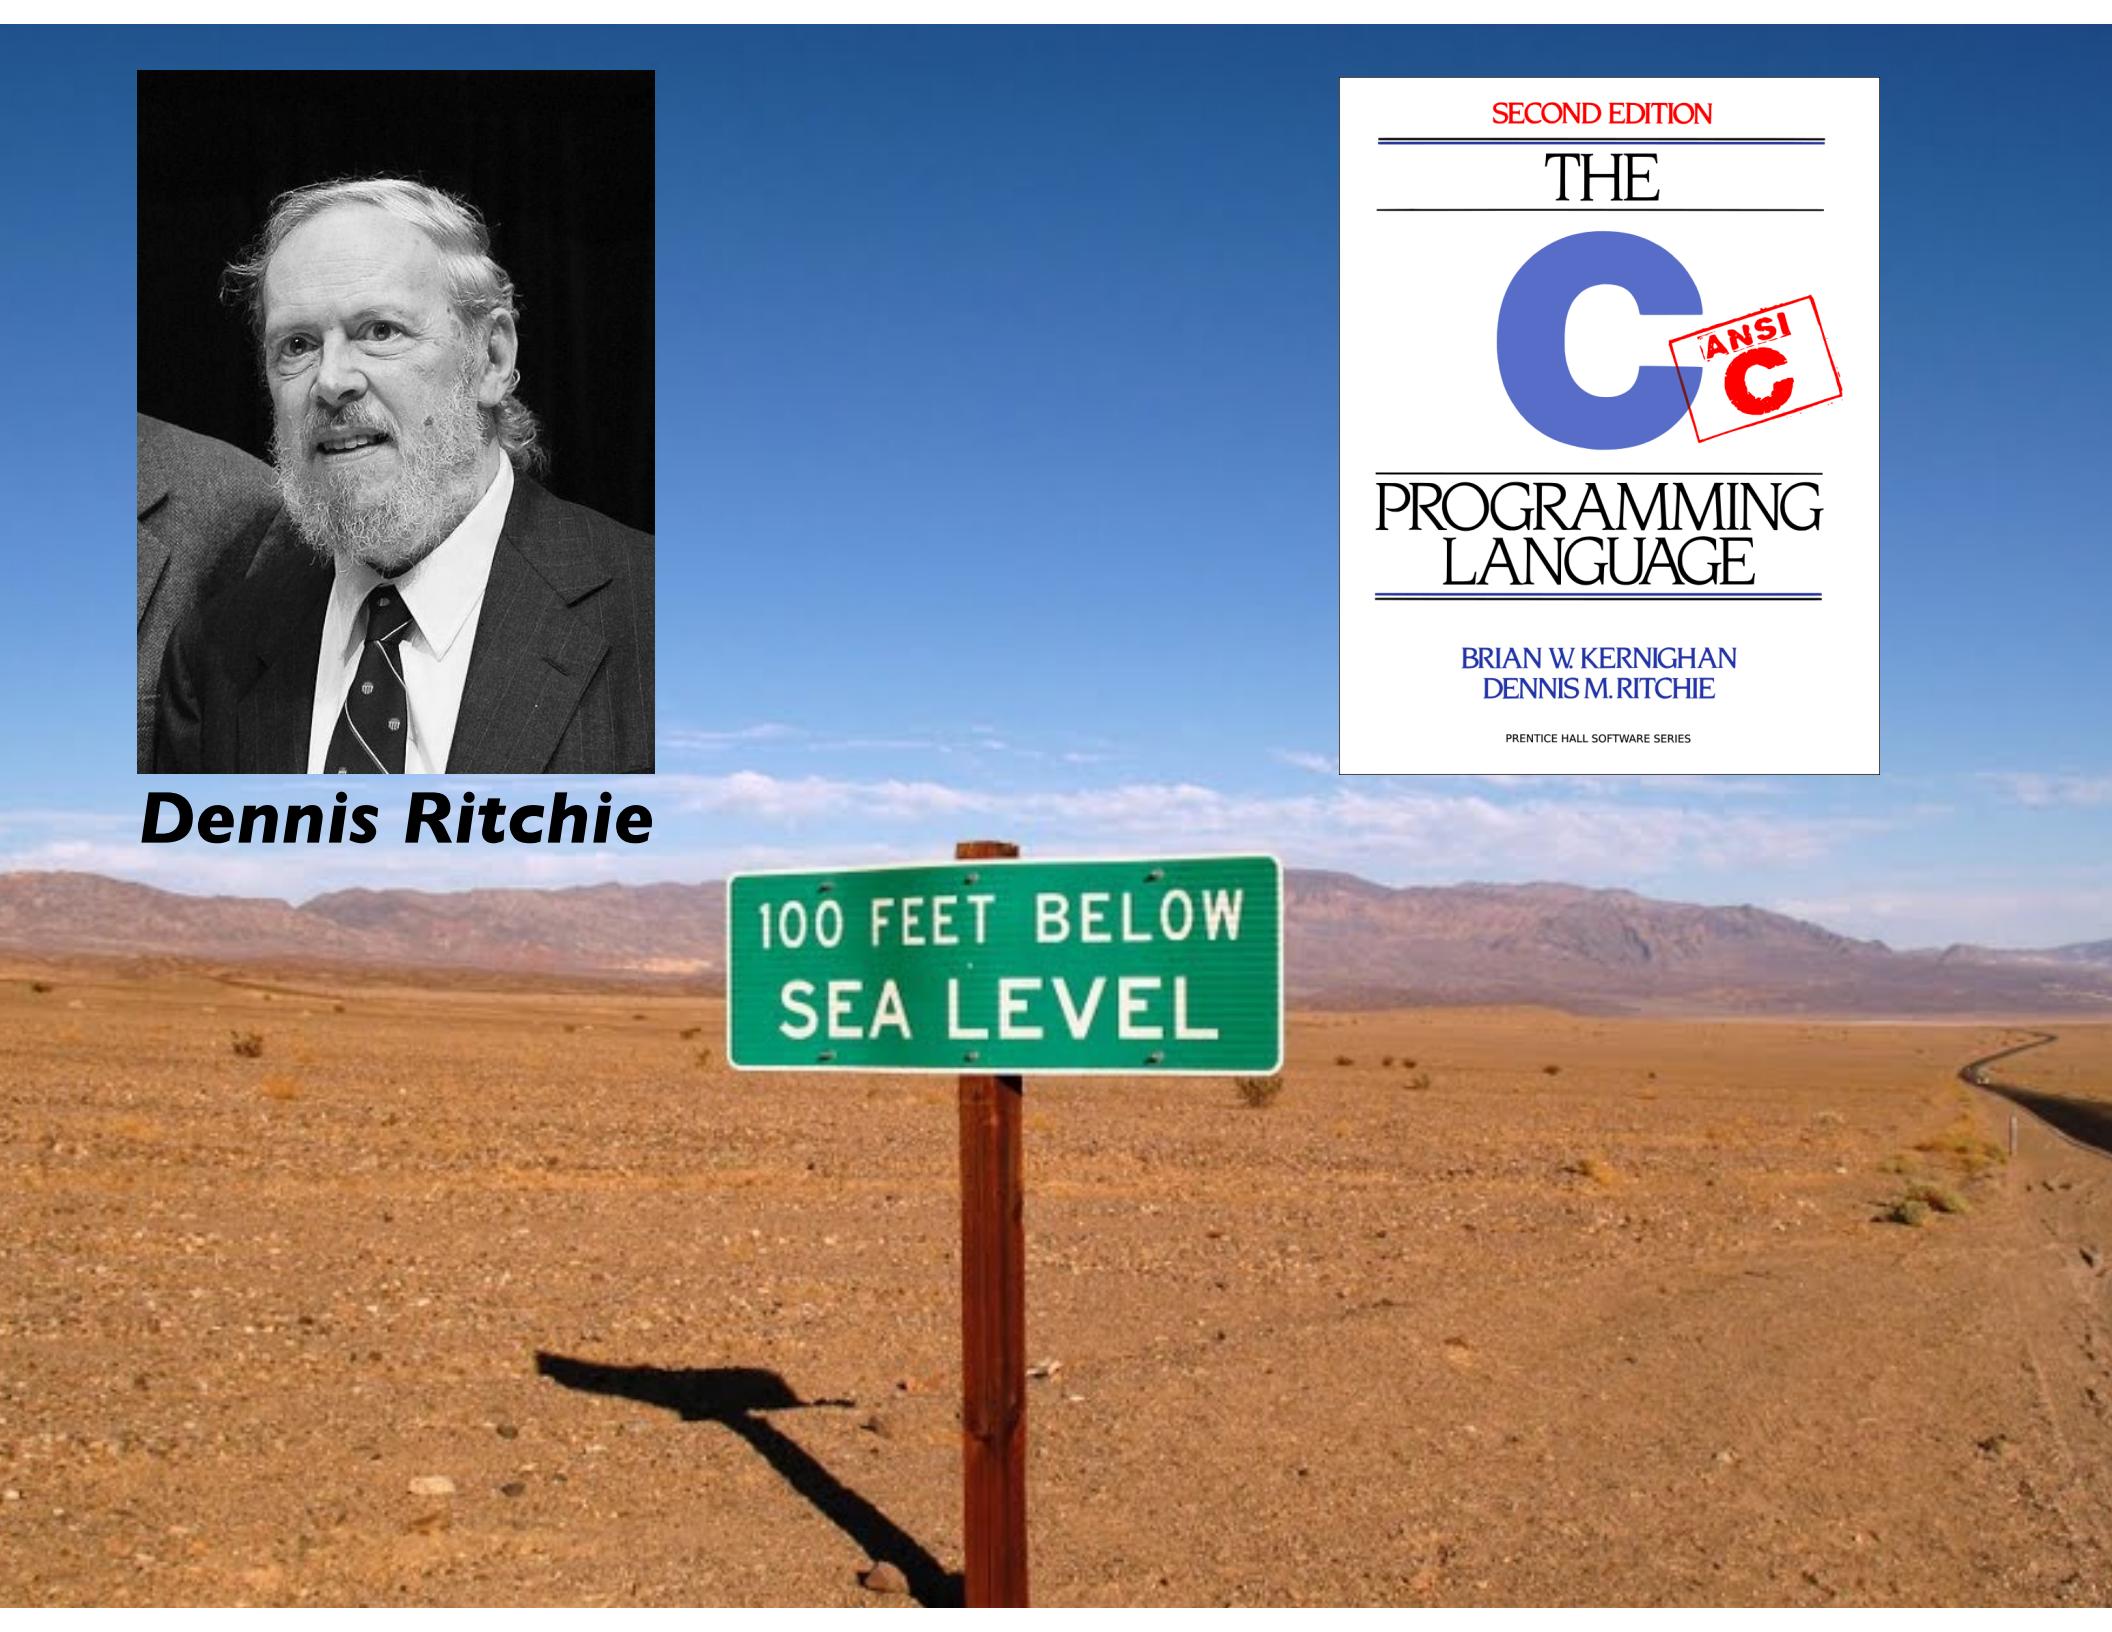A green road sign on a wooden post in a desert landscape. The sign reads "100 FEET BELOW SEA LEVEL".

100 FEET BELOW
SEA LEVEL

C is the language of choice for systems programmers



Ken Thompson built UNIX using C

This is not coincidence!
C features closely model the ISA:
data types, arithmetic/logical
operators, control flow, access to
memory, ... all provided in form
of portable abstractions

“BCPL, B, and C family of languages are particularly oriented towards system programming, are small and compactly described, and are amenable to translation by simple compilers. They are “close to the machine” in that the abstractions they introduce are readily grounded in the concrete data types and operations supplied by conventional computers, and they rely on library routines for input-output and other interactions with an operating system. ... At the same time, their abstractions lie at a sufficiently high level that, with care, portability between machines can be achieved.”

— Dennis Ritchie

The C Programming Language

“C is quirky, flawed, and an enormous success”

— Dennis Ritchie


“C gives the programmer what the programmer wants; few restrictions, few complaints”

— Herbert Schildt

“C: A language that combines all the elegance and power of assembly language with all the readability and maintainability of assembly language”

— Unknown

Programming language popularity over time

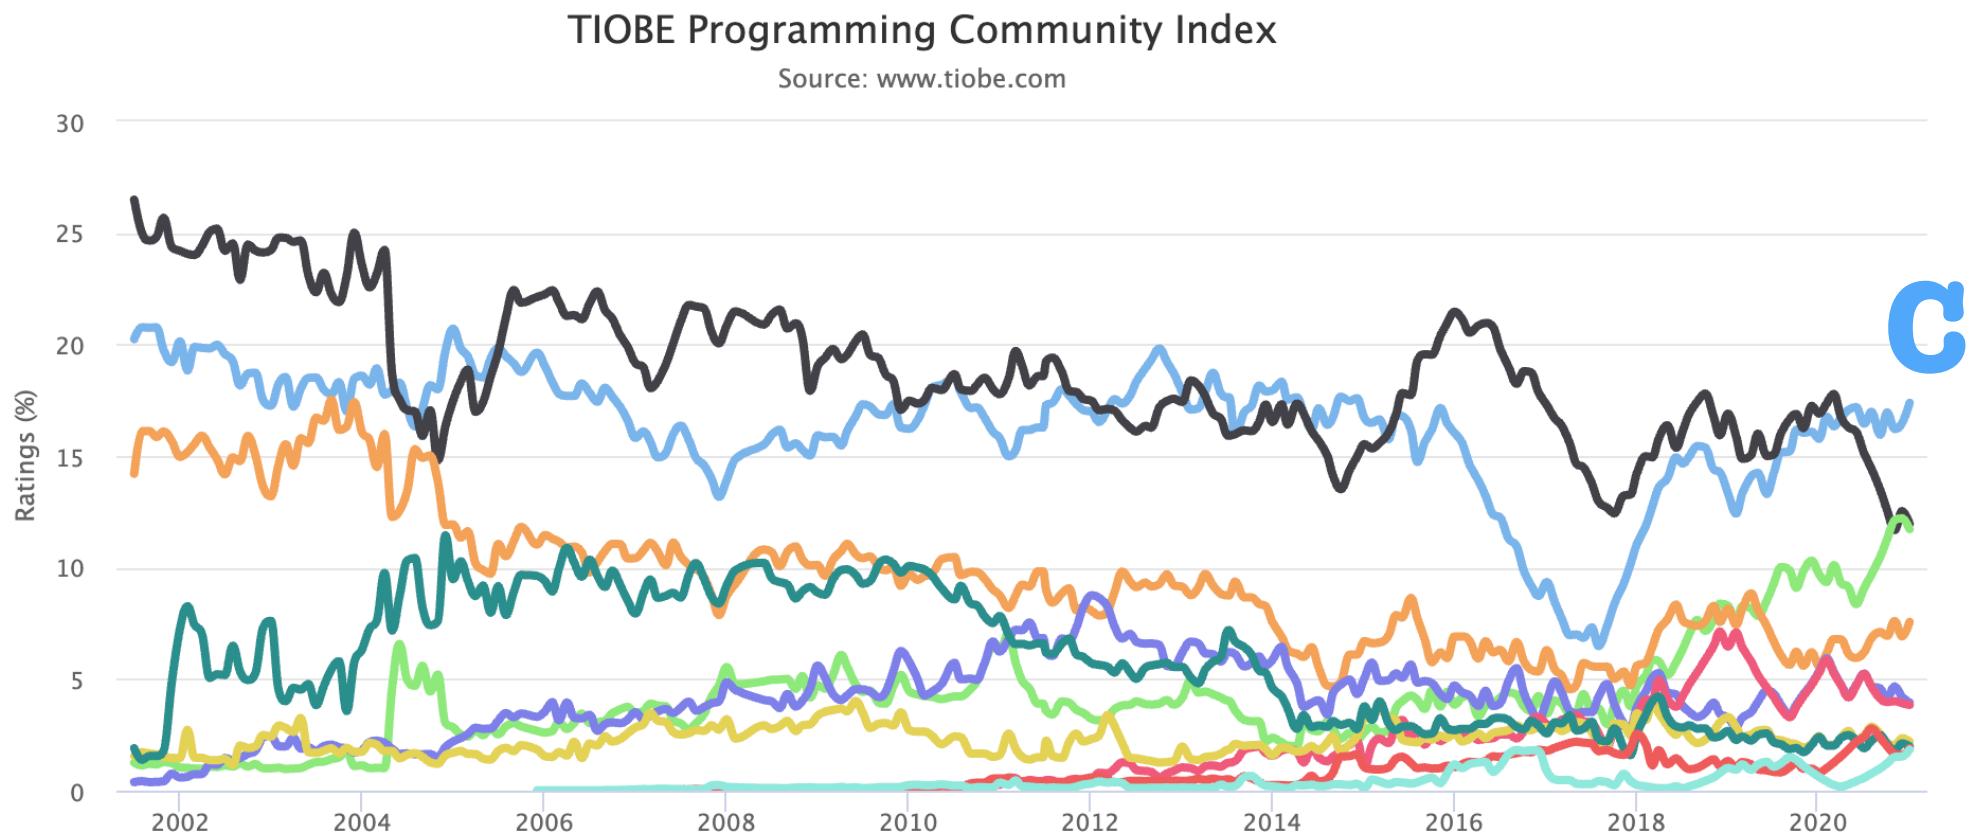

Compiler Explorer

is a neat interactive tool to see translation from C to assembly.
Let's try it now!

The screenshot shows the Compiler Explorer interface. On the left, a C source code editor contains the following code:

```
1 int global = 107;
2
3 void main(void) {
4     global = global + 1;
5 }
```

The code editor has syntax highlighting and a status bar showing line numbers. Above the code editor is a dropdown menu set to "C". To the right of the code editor is a compiler configuration panel. It shows the following settings:

- Compiler: ARM gcc 9.2.1 (none)
- Flags: -Og

Below the configuration panel is the assembly output window, which displays the generated assembly code for the main function:

```
1 main:
2   ldr r2, .L2
3   ldr r3, [r2]
4   add r3, r3, #1
5   str r3, [r2]
```

<https://godbolt.org>

Configure settings to follow along:

C

ARM gcc 9.2.1(none)

-Og

T.G.I.C!

Higher-level abstractions, structured programming

Named variables, constants

Arithmetic/logical operators

Control flow

Portable

Not tied to particular ISA or architecture

Low-level enough to get to machine when needed

Bitwise operations

Direct access to memory

Embedded assembly, too!

Know your tools!

Assembler as

Transform assembly code (text)
into object code (binary machine instructions)

Mechanical rewrite, few surprises

Compiler gcc

Transform C code (text)
into object code
(likely staged C → asm → object)

Complex translation, high artistry

Make

One-step build process using `make`

`Makefile` is text file that describes build steps as "recipes"

Dependencies determine which steps needed to re-build

Rule

`blink.bin: blink.s`

Recipe

`arm-none-eabi-as blink.s -o blink.o`

`arm-none-eabi-objcopy blink.o -O binary blink.bin`

Target

`run: blink.bin`

Dependency

`rpi-run.py blink.bin`

Writing out explicit recipes becomes onerous, so make has all kinds of ways to match patterns, define variables, etc.

Make pattern rules

```
NAME = myprogram
```

```
CFLAGS = -Og -g -Wall -std=c99 -ffreestanding  
LDFLAGS = -nostdlib -e main
```

```
all : $(NAME).bin
```

```
%.bin: %.elf  
        arm-none-eabi-objcopy $< -O binary $@
```

```
%.elf: %.o  
        arm-none-eabi-gcc $(LDFLAGS) $< -o $@
```

```
%.o: %.c  
        arm-none-eabi-gcc $(CFLAGS) -c $< -o $@
```

```
%.o: %.s  
        arm-none-eabi-as $< -o $@
```

Bare-metal vs. Hosted

The default build process for C assumes a *hosted* environment.

What does a hosted system have that we don't?

- standard libraries
- standard start-up sequence
- OS services

To build bare-metal, our Makefile disables these defaults

We supply our own replacements where needed

Build settings for bare-metal

Compile freestanding

CFLAGS = -ffreestanding

Link excludes standard library and start files

LDFLAGS = -nostdlib

Link with gcc if need division (b/c no ARM divide instruction)

LDLIBS = -lgcc

Write our own code for all libs and start files

This puts us in an exclusive club...

```
int getRandomNumber()
{
    return 4; // chosen by fair dice roll.
              // guaranteed to be random.
}
```