System Graft user guide

System Graft injects kernel modules into a SquashFS initrd and writes the result to a bootable UEFI USB stick.

The README goes into the vermagic constraint, the bootability model and the safety model in detail. This guide is the workflow, and the things to be careful with.

Read this before running anything

This tool erases disks

The USB writer **repartitions and erases whole block devices.** Point it at the wrong device and it destroys a disk. There's no undo and no recovery.

There are several guards, and they're good ones: external devices only, internal disks rejected even when named explicitly, the device re-read immediately before writing, anything mounted at a system path refused, and the GUI making you **type the device node** after showing its model, size, bus and mount points. **Don't look for ways around them.**

What is actually proven


These are three separate claims, and it's easy to blur them into one:

	Evidence
The patch path — injecting modules into the initrd	**120 tests, run on Ubuntu and macOS in CI**, and exercised against a **real appliance firmware image**. Genuinely well-evidenced.
The USB writer	macOS and Linux, each only ever run against an **attached disk image — never a physical stick.**
The result booting	A patched Waves SGS 16.5 image **booted in a KVM virtual machine** (OVMF, Q35) and the three injected drivers loaded and passed traffic. **Never on real hardware.**

In short: **the transformation is well tested, the delivery mechanism has only been proven against disk images, and the result has booted in a VM but never on a physical machine.** Plan for the stick not booting, and keep the original image.

macOS and Linux are the tested platforms for writing. Windows isn't supported for writing, though the patch path works under MSYS2 with `MSYS=winsymlinks:lnk` set.

The workflow

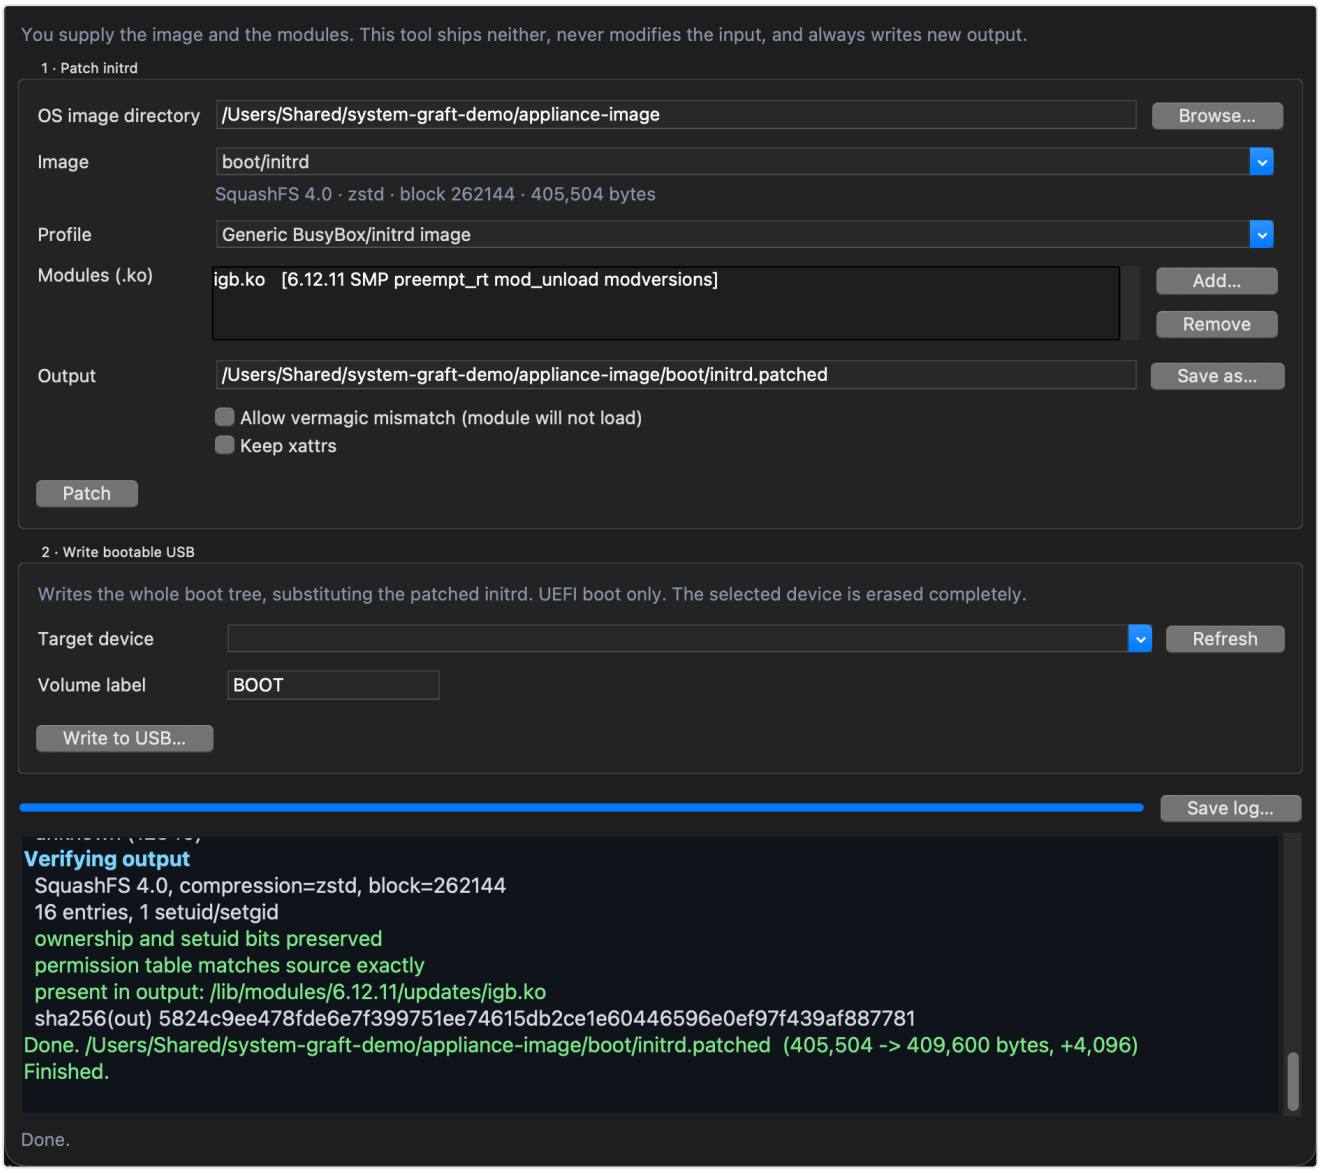


"You supply the image and the modules. This tool ships neither, never modifies the input, and always writes new output". That's the app's own first line, and it sums the whole thing up.

1. **Get the image and the modules.** The tool reads an image and modules you provide, and writes a new initrd. It doesn't fetch anything.
2. **Patch**: inject the modules into the initrd.
3. **Write**: put the boot tree, with the patched initrd swapped in, onto a USB stick.

There's a GUI and a CLI, and the README shows how to run both.

The vermagic wall, and why you shouldn't climb it

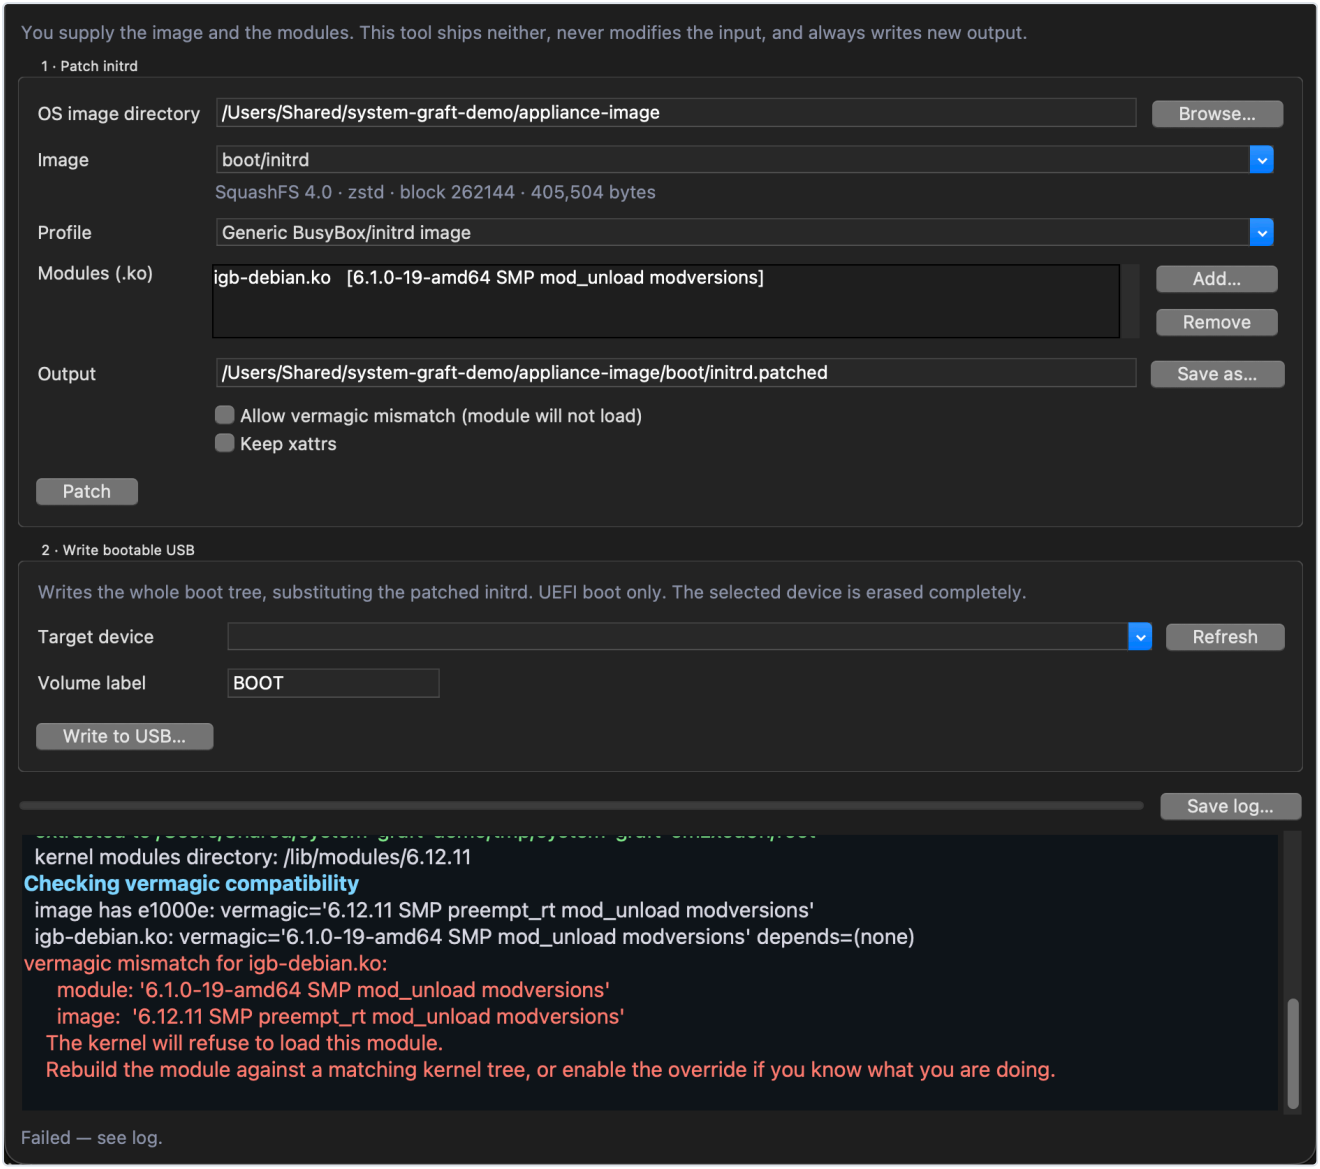

*The refusal gives both vermagic strings and what to do about it. **Allow vermagic mismatch** above the Patch button is the override, and its own label tells you how that ends: "module will not load".*

A module only loads into a kernel whose **vermagic matches in full**: kernel version, SMP, preemption model, `mod_unload`, `modversions`.

Get it wrong and the kernel **refuses the module silently, at boot, on a machine you may not have a console on.** That's the failure this tool is here to prevent, so it reads the vermagic of every `.ko` already in the image and every `.ko` you're adding, and **blocks on a mismatch by default**, printing both strings side by side.

There's an override. It's off by default and it "exists for people who know why they want it". **It won't get you past an inconvenient error.** The module still won't load; you'll just find out at boot instead of now.

> **Matching the vermagic string is necessary, but it isn't enough.** If `CONFIG_MODVERSIONS` appears in it, the **symbol CRCs must match too**. Build against the same kernel **source and config** as the image's kernel, not just the same version number.

If the driver you need can't be built as a module against that kernel, **this tool can't help you.** It doesn't touch the kernel, only the initrd.

Choosing a profile

A profile tells the tool where the initrd lives, which init script to hook, and **how a module load is written in that image's idiom**.

Profile	For
`generic`	Generic BusyBox/initrd image
`sgs`	Waves SGS (SoundGrid Server) — `boot/initrd`, `etc/init.d/system`

The hook goes in **immediately before the image's own module loading**, or failing that before it brings up networking.

The `sgs` profile wraps its loads in `Run "…"` because SGS init scripts do, so the hook follows the image's own conventions instead of sticking out.

Re-patching an already-patched image replaces the hook rather than stacking another one.

Things that are silently dropped or refused

	Behaviour
cpio/gzip initramfs	**Detected and rejected with a clear message.** SquashFS only — it won't corrupt one by trying.
xattrs	**Dropped by default.** On macOS the extract picks up host `com.apple.*` attributes, and baking those into a Linux image is at best noise.
File capabilities	Live in xattrs, so **dropped with them.** If your image relies on file caps rather than setuid, you need `--keep-xattrs` — **and to run on Linux**, since macOS is what introduces the junk.
SELinux labels	Same.
The kernel	Never touched.
Everything outside the initrd	Never touched — no vendor container formats opened, no checksums recomputed, no compatibility lists edited.

Writing the USB stick

Only external devices are ever offered. Internal disks are filtered out before you can see them and rejected again if you name one explicitly.

Attached disk images are excluded unless you explicitly allow them. That switch is there so the write path can be tested against a throwaway image instead of a real stick, and it's **not offered in the GUI**, on purpose.

Before the destructive step the device is **re-read**, so a stale selection can't be acted on. If the stick was removed or changed, the write aborts.

Every written file is verified by sha256 against its source before the volume is ejected.

Bootability is UEFI-only, and only warned about

The volume boots through the removable-media fallback path `\EFI\BOOT\BOOTX64.EFI`, so it needs no NVRAM entry and no boot sector.

If your tree doesn't contain that file, the tool warns you and still writes. A warning you click past produces a stick that isn't bootable. **Read the warning.**

Legacy BIOS isn't supported. That needs a boot sector, which this tool doesn't install. You can add one yourself afterwards.

The partition type is set to EFI System **if `sgdisk` is available and can elevate**; otherwise it's left as Microsoft Basic Data, which virtually all firmware accepts on removable media. So the partition type you end up with silently depends on whether elevation succeeded.

Troubleshooting

Symptom	Cause
"vermagic mismatch" and it refuses	Working as intended. Rebuild the module against a matching kernel tree (The vermagic wall, and why you shouldn't climb it).
Overrode the mismatch, module still doesn't load at boot	Expected. The override doesn't make the kernel accept it — and with `CONFIG_MODVERSIONS`, CRCs must match too (The vermagic wall, and why you shouldn't climb it).
Image rejected as not SquashFS	It's a cpio/gzip initramfs. Not supported, and refusing beats corrupting it (Things that are silently dropped or refused).
File capabilities lost in the patched image	xattrs are dropped by default; use `--keep-xattrs`, on Linux (Things that are silently dropped or refused).
Stick written but won't boot	No `\EFI\BOOT\BOOTX64.EFI` in the tree — the tool warned (Writing the USB stick). Or the firmware is legacy-BIOS only (Writing the USB stick). Or: **no image from this tool has ever been booted on real hardware** (Read this before running anything).
Firmware doesn't see the partition	`sgdisk` couldn't elevate, so the type stayed Microsoft Basic Data (Writing the USB stick).
My USB stick isn't listed	Only devices the OS reports as **external** are shown (Writing the USB stick).
A disk image isn't listed	Virtual devices need the explicit allow flag, and it isn't in the GUI (Writing the USB stick).
The write aborted just before starting	The device was re-read and had changed or gone (Writing the USB stick).
On Linux and it behaved oddly	The Linux write path is **implemented and completely untested** (Read this before running anything).

See also

- API.md: both CLIs, the Python API and the profile system
- DEVELOPING.md: the rules for working on this safely
- README: vermagic, bootability, safety model, scope