



G270HAN01.0

Engineering Change Request

GDIS


Nov. 07st Y23

AUO Display Plus Engineering Change Request

➤ Engineering Change item

Item	As Is	To Be	reason
polarizer	TAC	PET	The polarizer manufacturer proposed that the convergence materials originally had two types, TAC and PET, which were converged to PET. (The surface AG will not change.)
Reflector	TCJ25N	EST250P	The original reflector (TCJ25N) was EOL. To keep supply smoothly, ADP proposed to adopt new reflector (EST250P).

➤ EC schedule

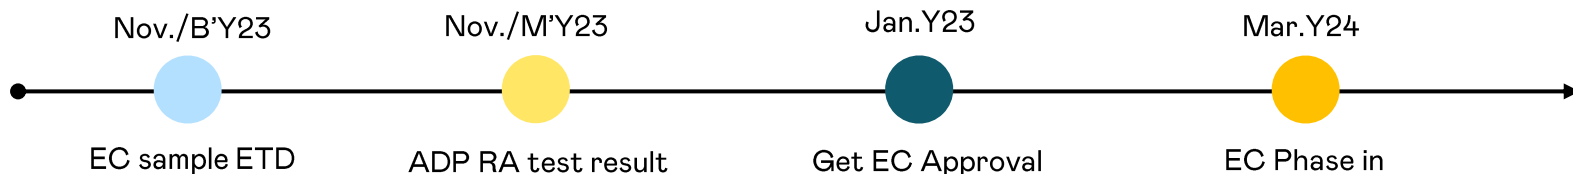

RA Test result

Optical Measurement Report												
Originator	chongfeng		Model/PCS		G270HAN01.0/5pcs				Date	2023/11/2		
Test Condition	Lum.,CR,Chromaticity,Uniformity											
Test System	Detector	Inverter		DC Voltage					Warm up time			
FPM-520-2	SR-UL1R	NA		24V					30 min			
【Test Reason】												
G270HAN01.001導入底下四合一BC,												
【Judgement】												
PASS												
Test Items	unit	PSS			23.8°C	23.8°C	23.8°C	23.8°C	23.8°C	-4σ	mean	+4σ
					G93A82T2BJZZS017G0200439R9E1P026	G3A82T2GLZZS017G0200439R9E1P026	G3A82T2GKZZS017G0200439R9E1P026	G3A82T2DJZZS017G0200439R9E1P026	G3A82T2BFZZS017G0200439R9E1P026			
		min	typ	max								
Center Brightness	cd/m ²	800	1000		1092.9	1186.4	1145.6	1103.5	1121.9	980.905	1130.1	1279.207
Darkness (L0)					0.94	1.15	0.98	0.94	0.99	0.652	1.00	1.343
Contrast Ratio(CR)	---	700	1000		1168.4	1034.8	1168.8	1174.9	1135.2	900.785	1136.4	1372.101
Brightness(9P Ave.)	cd/m ²				1040.3	1089.3	1076.3	1038.4	1041.9	961.974	1057.2	1152.519
Chromaticity												
Wx	---	0.283	0.313	0.343	0.303	0.301	0.302	0.305	0.305	0.296	0.303	0.310
Wy	---	0.299	0.329	0.359	0.323	0.323	0.325	0.326	0.328	0.317	0.325	0.333
Rx	---	0.634	0.664	0.694	0.665	0.664	0.665	0.665	0.667	0.661	0.665	0.669
Ry	---	0.282	0.312	0.342	0.313	0.313	0.313	0.313	0.313	0.313	0.313	0.314
Gx	---	0.250	0.280	0.310	0.277	0.277	0.276	0.277	0.277	0.275	0.277	0.278
Gy	---	0.632	0.662	0.692	0.654	0.654	0.655	0.656	0.655	0.652	0.655	0.658
Bx	---	0.120	0.150	0.180	0.149	0.149	0.149	0.149	0.149	0.149	0.149	0.150
By	---	0.020	0.050	0.080	0.057	0.057	0.057	0.056	0.057	0.055	0.057	0.058
NTSC(Adobe)	---		87		87.1	86.9	87.3	87.5	87.5	86.215	87.252	88.290
CCT	---				7157	7249	7176	6996	6957	6607.632	7106.953	7606.273
Uniformity												
9P B max-Bavg /Bavg			20%	7.6%	9.0%	6.5%	9.1%	7.8%	0.037	0.080	0.123	
9P B min-Bavg /Bavg			20%	9.1%	7.2%	7.2%	8.7%	7.3%	0.041	0.079	0.116	
9P Δx			0.010	0.005	0.005	0.006	0.004	0.005	0.002	0.005	0.008	
9P Δy			0.012	0.007	0.007	0.006	0.005	0.006	0.002	0.006	0.011	



Tap Into The Possibilities