



G190EAN01.6 Engineering Change Request

GDBU

28th APR.Y23

AUO
AUO Display+

AUO Display Plus Engineering Change Request

➤ Engineering Change item

Item	Reflector
As is	TCJ18N
To Be	EST188P

Because the Toray TCJ18N raw material has been EOL , ADP suggest to change reflector from TorayTCJ18N to EST188P

➤ Material Comparison

	As is	To be
Thickness(mm)	0.233	0.228
Front side optics	100%	←
Rear side optics (sensor hole)	100%	135%
Friction test	PASS	←
Stress test (500g & 1000g)	PASS	←

AUO Display Plus Engineering Change Request

➤ Optics→PASS

Optical Measurement Report												
Originator	chun li		Model/PCS		G190EAN01.6/5pcs				Date	2023/1/19		
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker											
Test System	Detector	Inverter		DC Voltage					Warm up time			
FPM-520-2	SR-UL1R	NA		12V					30 min			
【Test Reason】												
G190EAN01 V6反射片RA												
【Judgement】												
PASS												
Test Items	unit	PSS			23.0°C	23.0°C	23.0°C	23.0°C	23.0°C	-4σ	mean	+4σ
					2023/1/17 9:25	2023/1/17 9:52	2023/1/17 10:19	2023/1/17 10:47	2023/1/17 11:13			
					C2H7FX8DAZZS01	C2H7FF6HJZZS01	C2H7FX8DBZZS01	C2H7FE6TEZZS01	C2H7FE6PJZZS01			
		min	typ	max								
Center Brightness	cd/m ²	800	950		1102.0	1071.0	1056.0	1064.0	1021.0	946.202	1062.8	1179.398
Darkness (L0)					0.89	0.94	0.86	1.00	0.89	0.698	0.91	1.129
Contrast Ratio(CR)	---	600	1000		1238.8	1144.5	1232.8	1068.6	1147.7	883.351	1166.5	1449.576
Brightness(5P Ave.)	cd/m ²				1026.7	1007.4	994.2	1002.3	963.6	906.576	998.9	1091.128
Chromaticity												
	Wx	---	0.269	0.299	0.329	0.299	0.301	0.301	0.301	0.303	0.295	0.301
	Wy	---	0.285	0.315	0.345	0.321	0.324	0.325	0.326	0.325	0.317	0.324
	Rx	---	0.621	0.651	0.681	0.650	0.650	0.651	0.650	0.649	0.647	0.650
	Ry	---	0.313	0.343	0.373	0.342	0.342	0.342	0.342	0.343	0.340	0.344
	Gx	---	0.272	0.302	0.332	0.299	0.300	0.299	0.299	0.301	0.297	0.300
	Gy	---	0.581	0.611	0.641	0.612	0.613	0.612	0.613	0.610	0.606	0.612
	Bx	---	0.125	0.155	0.185	0.155	0.155	0.155	0.155	0.155	0.154	0.155
	By	---	0.045	0.075	0.105	0.068	0.070	0.069	0.070	0.069	0.066	0.069
	NTSC	%		72		72.6	72.4	72.7	72.6	71.7	70.847	72.420
	CCT	---				7442	7238	7210	7239	7148	6812.633	7255.268
Uniformity												
	5P					1.116	1.105	1.097	1.104	1.099	1.075	1.104
	9P	White		1.333		1.141	1.134	1.113	1.113	1.093	1.042	1.119

AUO Display Plus Engineering Change Request




➤ RA→PASS

RA Test Summary Report


保管單位 Storage	RA
保存年限 Retention Period	依產品適用範圍保存(參照： AUOQP-05-002 紀錄管制流程)

Product No	G190EAN01.6		Part No	97.19G06.600		Applicant/Dept		仇棟華/FR1BF3		Judgement		
Test Purpose	G190EAN01 V6反射片RA					Application Date		2023/01/11		PASS		
						Input Date		2023/01/16				
RA No	R230113007		Product Stage	MVT		Issue Date		2023/01/30				
Test Item	Test Condition	Test Panel				Test Result						
HTO	50°C 500h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		R2301130070001		yc2h6dw5gczzs0100		OK	OK	OK	OK	OK	PASS	PASS
		R2301130070002		yc2h7fe9nczzs0100		OK	OK	OK	OK	OK	PASS	
		R2301130070003		yc2h7fe6jdzzs0100		OK	OK	OK	OK	OK	PASS	
THB	50°C 80% 500h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		R2301130070004		yc2h7fe9nbzzs0100		OK	OK	OK	OK	OK	PASS	PASS
		R2301130070005		yc2h6dw6mgzzs0100		OK	OK	OK	OK	OK	PASS	
		R2301130070006		yc2h6dw6mhzzs0100		OK	OK	OK	OK	OK	PASS	
HTO	25°C	No	Chip_Id	Shipping_No		T0★	T816★	T1000★			Judgement	Judgement
		R2301130070013		yc2h7fe9nazzs0100		OK	OK	OK			PASS	PASS
		R2301130070014		yc2h7fe6tezzs0100		OK	OK	OK			PASS	
		R2301130070015		yc2h7fe6pjzzs0100		OK	OK	OK			PASS	
TST	-20°C/30min, 60°C/30min, 40°C minimum ramp rate, 100 cycles judge, 200 cycles reference 200cycles	No	Chip_Id	Shipping_No		C0★	C100★	C200			Judgement	Judgement
		R2301130070016		yc2h7fx8dbzzs0100		OK	OK	OK			PASS	PASS
		R2301130070017		yc2h7fx8dazzs0100		OK	OK	OK			PASS	
		R2301130070018		yc2h7ff0hdzzs0100		OK	OK	OK			PASS	

EC plan

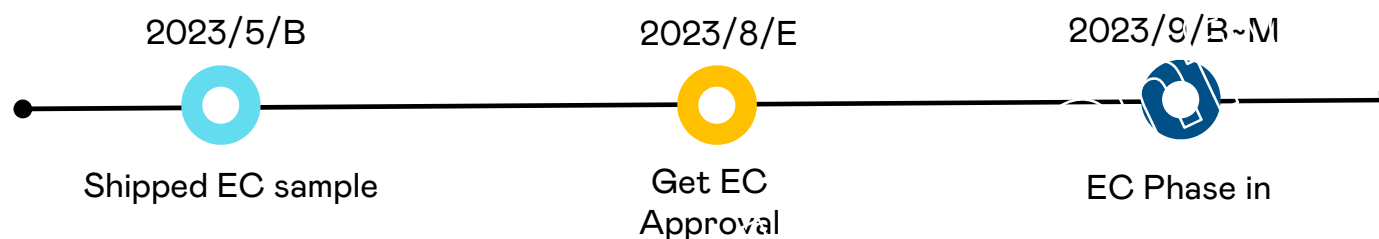

- Current Plan: EC sample will be shipped on 5/B, ADP looks forward to getting customer agreement by the end of 09/2023 and running the EC phase-in.

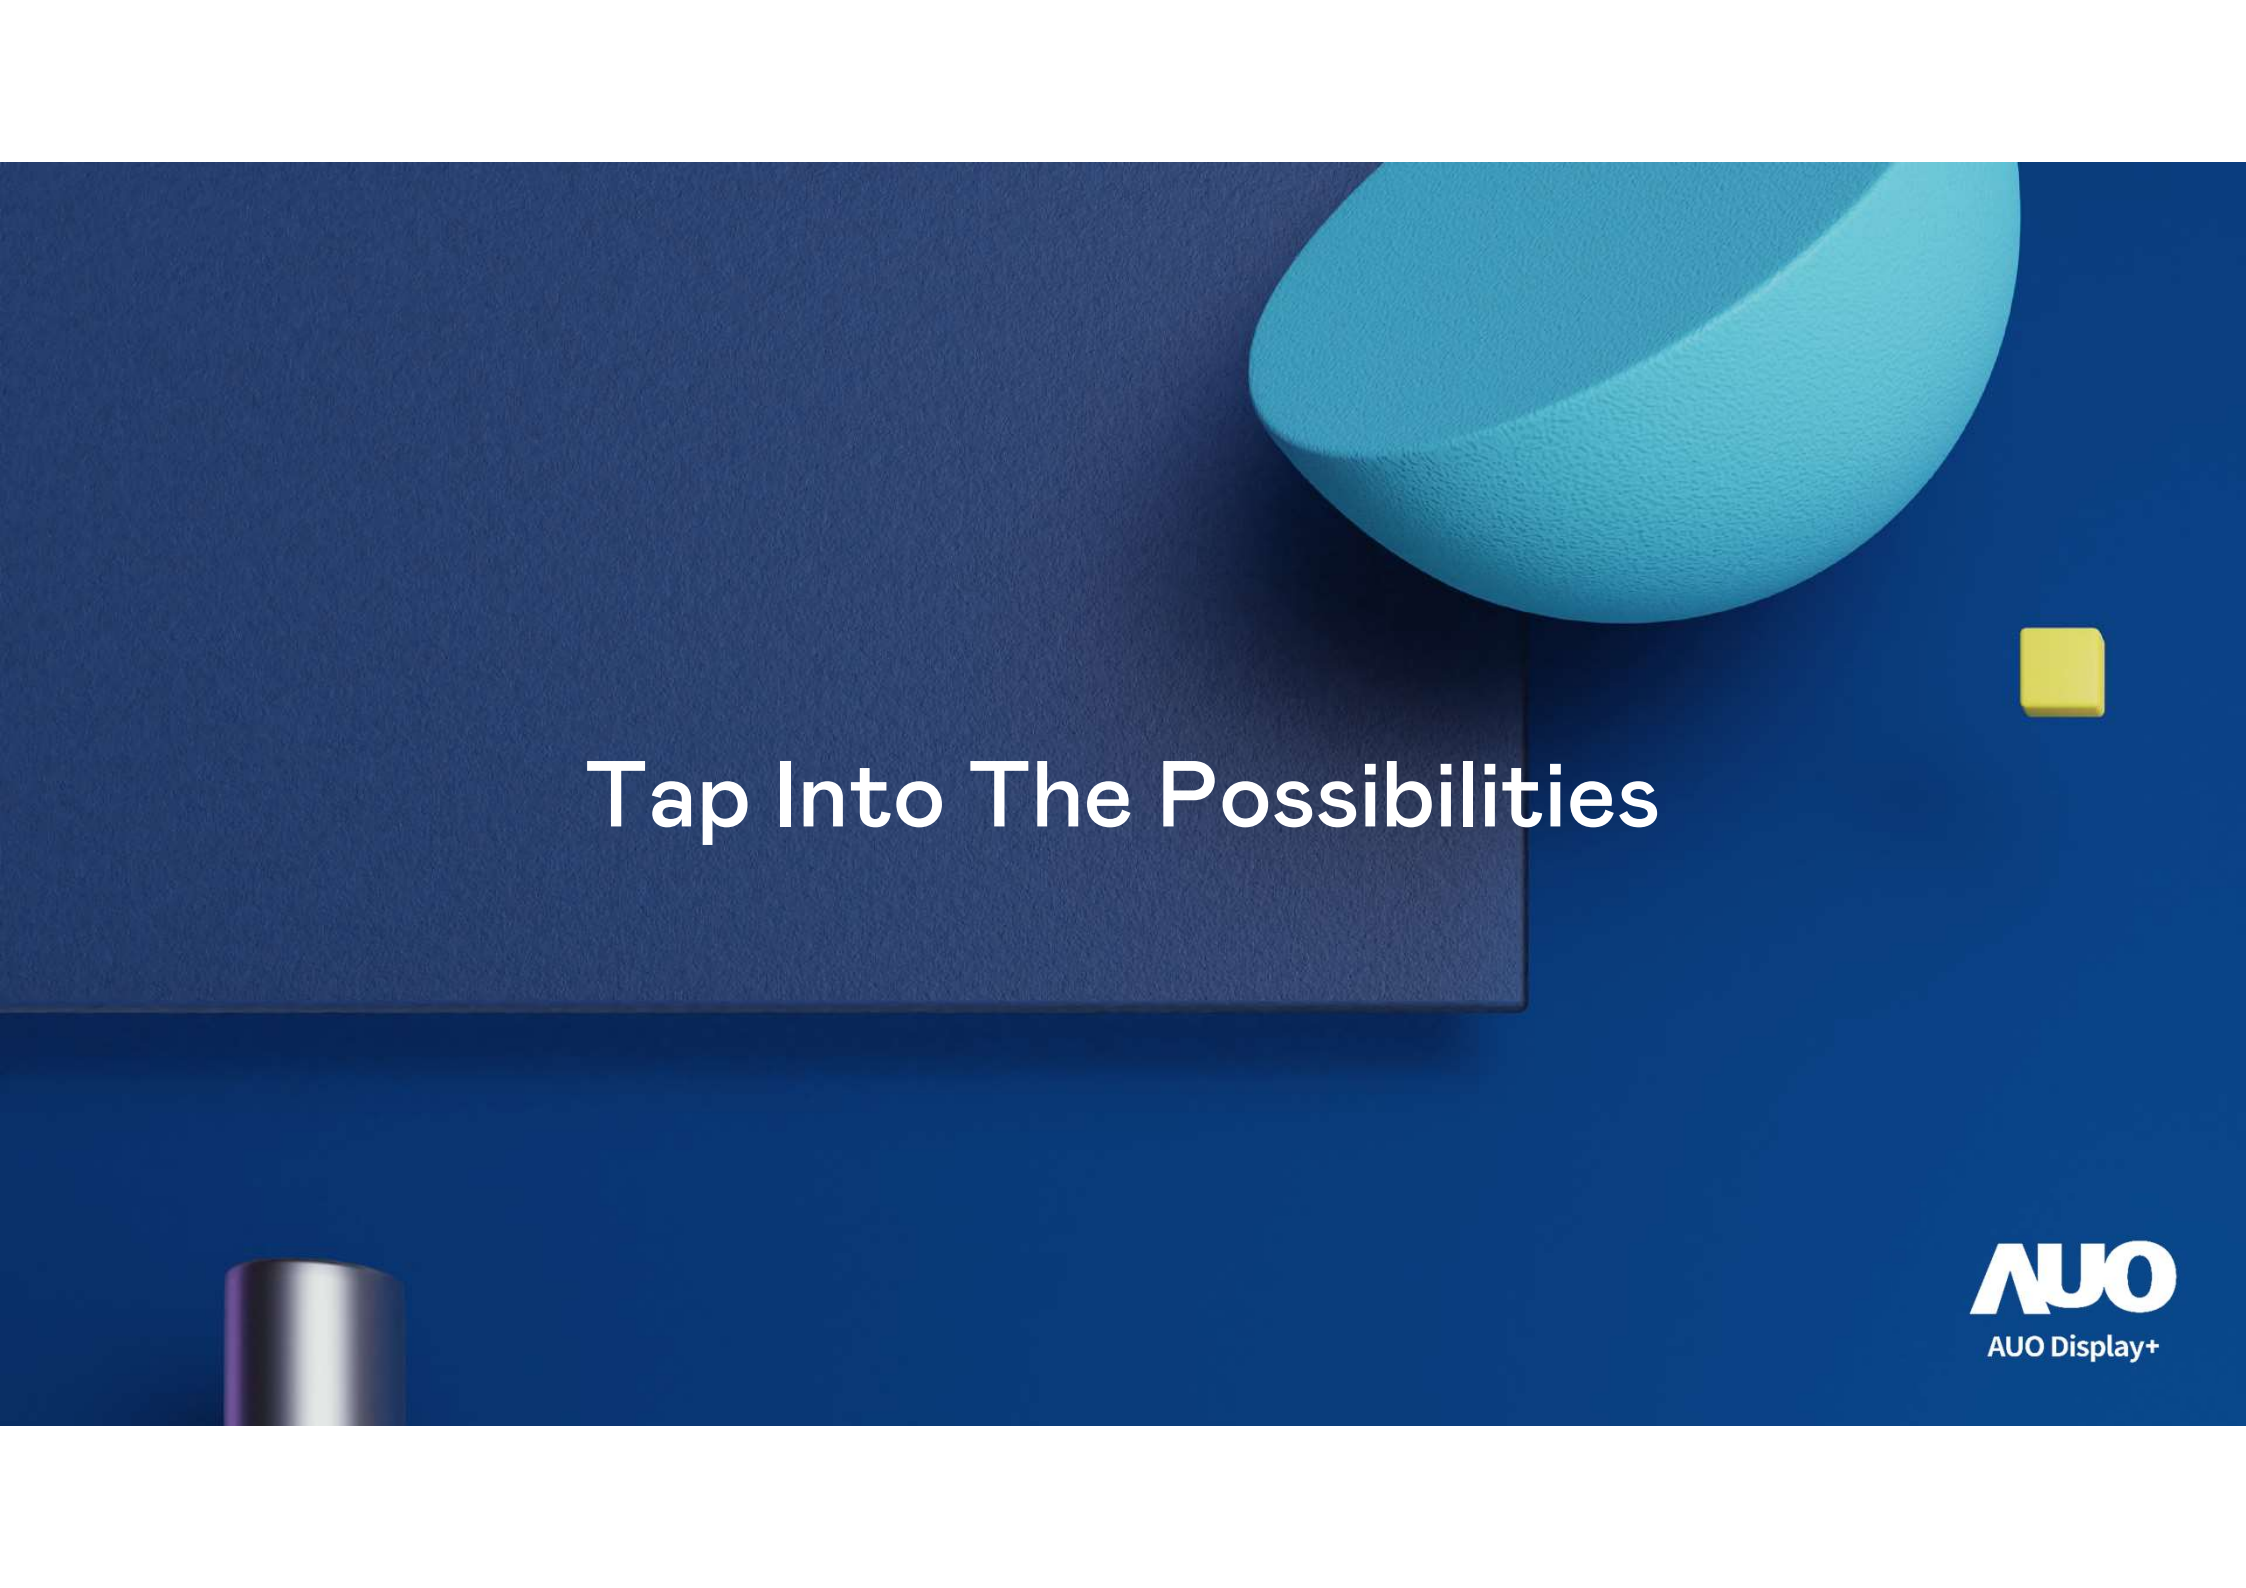

Tap Into The Possibilities

AUO
AUO Display+